

2N4857
2N4857A

N-CHANNEL
SILICON JFET



TO-18 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2N4857 and 2N4857A are N-Channel silicon JFETs designed for analog switching and chopper applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^{\circ}\text{C}$)

	SYMBOL		UNITS
Drain-Source Voltage	V_{DS}	40	V
Drain-Gate Voltage	V_{DG}	40	V
Reverse Gate-Source Voltage	V_{GSR}	40	V
Forward Gate Current	I_{GF}	50	mA
Power Dissipation ($T_A=25^{\circ}\text{C}$)	P_D	360	mW
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +200	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_{GSS}	$V_{GS}=20\text{V}, V_{DS}=0$		0.25	nA
I_{GSS}	$V_{GS}=20\text{V}, V_{DS}=0, T_A=150^{\circ}\text{C}$		0.5	μA
I_{DSS}	$V_{DS}=15\text{V}, V_{GS}=0$	20	100	mA
$I_{D(OFF)}$	$V_{DS}=15\text{V}, V_{GS}=10\text{V}$		0.25	nA
$I_{D(OFF)}$	$V_{DS}=15\text{V}, V_{GS}=10\text{V}, T_A=150^{\circ}\text{C}$		0.5	μA
BV_{GSS}	$I_G=1.0\mu\text{A}, V_{DS}=0$	40		V
$V_{GS(OFF)}$	$V_{DS}=15\text{V}, I_D=0.5\text{nA}$	2.0	6.0	V
$V_{DS(ON)}$	$I_D=10\text{mA}, V_{GS}=0$		0.5	V
$r_{DS(ON)}$	$V_{GS}=0, I_D=0, f=1.0\text{kHz}$		40	Ω
C_{rss}	$V_{GS}=10\text{V}, V_{DS}=0, f=1.0\text{MHz}$ (2N4857)		8.0	pF
C_{rss}	$V_{GS}=10\text{V}, V_{DS}=0, f=1.0\text{MHz}$ (2N4857A)		3.5	pF
C_{iss}	$V_{GS}=10\text{V}, V_{DS}=0, f=1.0\text{MHz}$ (2N4857)		18	pF
C_{iss}	$V_{GS}=10\text{V}, V_{DS}=0, f=1.0\text{MHz}$ (2N4857A)		10	pF
t_d	$V_{DD}=10\text{V}, V_{GS(OFF)}=6.0\text{V}, I_D=10\text{mA}$		6.0	ns
t_r	$V_{DD}=10\text{V}, V_{GS(OFF)}=6.0\text{V}, I_D=10\text{mA}$		4.0	ns
t_{off}	$V_{DD}=10\text{V}, V_{GS(OFF)}=6.0\text{V}, I_D=10\text{mA}$ (2N4857)		50	ns
t_{off}	$V_{DD}=10\text{V}, V_{GS(OFF)}=6.0\text{V}, I_D=10\text{mA}$ (2N4857A)		40	ns


R0 (11-June 2012)

2N4857
2N4857A

N-CHANNEL
SILICON JFET



TO-18 CASE - MECHANICAL OUTLINE

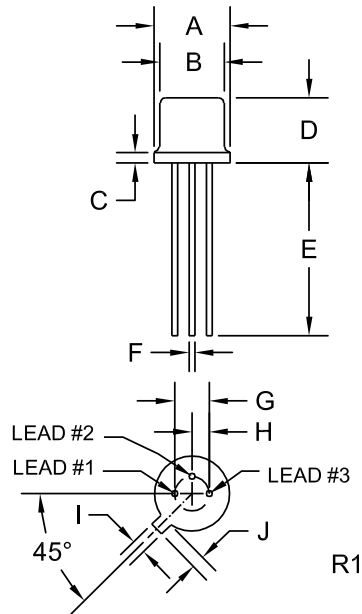

LEAD CODE:

- 1) Source
- 2) Drain
- 3) Gate

MARKING: FULL PART NUMBER

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.209	0.230	5.31	5.84
B (DIA)	0.178	0.195	4.52	4.95
C	-	0.030	-	0.76
D	0.170	0.210	4.32	5.33
E	0.500	-	12.70	-
F (DIA)	0.016	0.019	0.41	0.48
G (DIA)	0.100		2.54	
H	0.050		1.27	
I	0.036	0.046	0.91	1.17
J	0.028	0.048	0.71	1.22

TO-18 (REV: R1)

R0 (11-June 2012)

www.centalsemi.com

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centalsemi.com

Worldwide Field Representatives:
www.centalsemi.com/wwreps

Worldwide Distributors:
www.centalsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centalsemi.com/terms