


# Track Shaped Receive Wireless Charge Coil

Pulse Part Number WMRR132F-0

V03

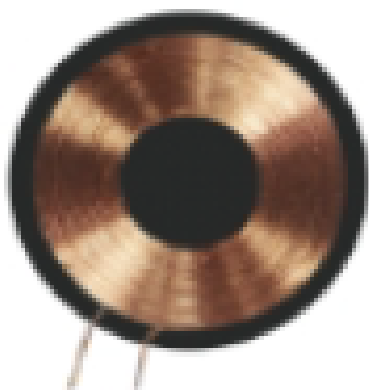

### Features

- Magnetic Coil: antifreeze plate + coil
- Meet the Qi international standard, be customized according to order
- Ultrathin 、 compact 、 high efficiency 、 low heat
- Length and gap of the outgoing line is customizability

### Application

- Wearable wireless charge

### Electrical specifications

|                             |              |
|-----------------------------|--------------|
| Output Voltage(V)           | 5            |
| Maximum Output Current (mA) | 100-400(max) |
| Inductance(uH)              | 11.5±10%     |
| Internal Resistance (mΩ)    | 590±10%      |
| Wire Diameter (mm)          | 0.15mm±0.05  |
| Testing Environment         | 100KHZ 1V    |



Contact: [mobiledeviceantenna.sales@pulseelectronics.com](mailto:mobiledeviceantenna.sales@pulseelectronics.com)

# Track Shaped Receive Wireless Charge Coil

Pulse Part Number WMRR132F-0

V03

## Mechanical dimensions

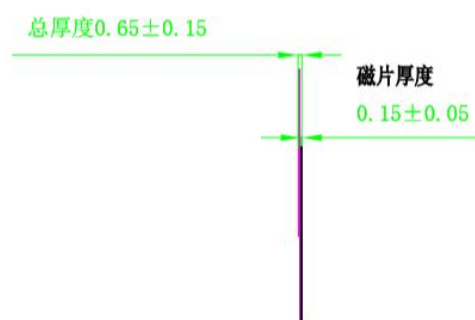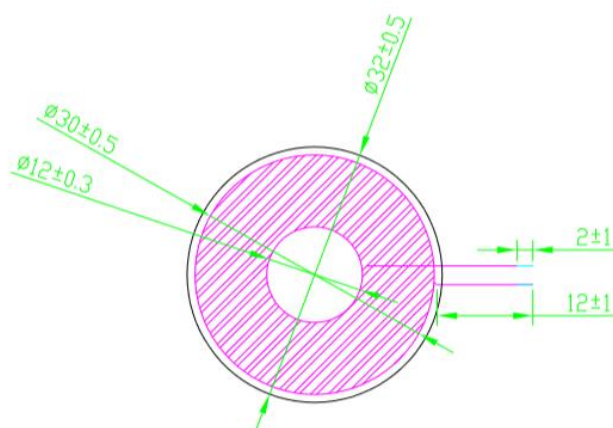

### 技术参数:

1. 工件表面平整光滑，无明显伤痕。
2. 线圈为 $\phi 0.15$ 的本黄色热风酒精自沾漆包线, 三线并绕
3. 电感量:  $12.5 \pm 10\% \mu\text{H}$

Contact: [mobiledeviceantenna.sales@pulseelectronics.com](mailto:mobiledeviceantenna.sales@pulseelectronics.com)