

# MOSFET – Power, N-Channel 100 V, 32 A, 37 mΩ

# **NTD6414AN, NVD6414AN**

#### **Features**

- Low R<sub>DS(on)</sub>
- High Current Capability
- 100% Avalanche Tested
- NVD Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free and are RoHS Compliant

#### MAXIMUM RATINGS (T<sub>J</sub> = 25°C unless otherwise noted)

Para	Symbol	Value	Unit		
Drain-to-Source Volta	V <sub>DSS</sub>	100	V		
Gate-to-Source Volta	ge – Conti	nuous	V <sub>GS</sub>	±20	V
Continuous Drain	Steady State			32	Α
Current R <sub>θJC</sub>	State	T <sub>C</sub> = 100°C		22	
Power Dissipation $R_{\theta JC}$	Steady T <sub>C</sub> = 25°C		P <sub>D</sub>	100	W
Pulsed Drain Current	t <sub>p</sub>	= 10 μs	I <sub>DM</sub>	117	Α
Operating and Storage Temperature Range			T <sub>J</sub> , T <sub>stg</sub>	-55 to +175	°C
Source Current (Body	Is	32	Α		
Single Pulse Drain-to- Energy (V <sub>DD</sub> = 50 Vdc I <sub>L(pk)</sub> = 32 A, L = 0.3 m	E <sub>AS</sub>	154	mJ		
Lead Temperature for Purposes, 1/8" from C		Seconds	TL	260	°C


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

#### THERMAL RESISTANCE RATINGS

Parameter	Symbol	Max	Unit
Junction-to-Case (Drain) Steady State	$R_{\theta JC}$	1.5	°C/W
Junction-to-Ambient (Note 1)	$R_{\theta JA}$	37	

Surface mounted on FR4 board using 1 sq in pad size, (Cu Area 1.127 sq in [1 oz] including traces).


V <sub>(BR)DSS</sub>	R <sub>DS(on)</sub> MAX	I <sub>D</sub> MAX (Note 1)
100 V	37 mΩ @ 10 V	32 A







# MARKING DIAGRAM & PIN ASSIGNMENTS



A = Assembly Location\*

Y = Year

WW = Work Week

6414AN = Device Code

G = Pb-Free Package

\* The Assembly Location code (A) is front side optional. In cases where the Assembly Location is stamped in the package, the front side assembly code may be blank.

### **ORDERING INFORMATION**

See detailed ordering and shipping information on page 5 of this data sheet.

NOTE: Some of the devices on this data sheet have been **DISCONTINUED**. Please refer to the table on page 5.

## **ELECTRICAL CHARACTERISTICS** (T<sub>J</sub> = 25°C unless otherwise noted)


Parameter	Symbol	Test Condi	tion	Min	Тур	Max	Unit
OFF CHARACTERISTICS						1	L
Drain-to-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	$V_{GS} = 0 \text{ V}, I_D =$	250 μΑ	100			V
Drain-to-Source Breakdown Voltage Temperature Coefficient	V <sub>(BR)DSS</sub> /T <sub>J</sub>				107		mV/°C
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	$V_{GS} = 0 \text{ V}.$ $T_J = 25^{\circ}\text{C}$				1.0	μΑ
		$V_{GS} = 0 V$ , $V_{DS} = 100 V$	T <sub>J</sub> = 125°C			100	
Gate-to-Source Leakage Current	I <sub>GSS</sub>	$V_{DS} = 0 \text{ V}, V_{GS} = \pm 20 \text{ V}$				±100	nA
ON CHARACTERISTICS (Note 3)						•	•
Gate Threshold Voltage	V <sub>GS(TH)</sub>	$V_{GS} = V_{DS}, I_D =$	= 250 μA	2.0		4.0	V
Negative Threshold Temperature Coefficient	V <sub>GS(TH)</sub> /T <sub>J</sub>				8.3		mV/°C
Drain-to-Source On-Resistance	R <sub>DS(on)</sub>	V <sub>GS</sub> = 10 V, I <sub>D</sub>	= 32 A		30	37	mΩ
Forward Transconductance	gFS	V <sub>GS</sub> = 5.0 V, I <sub>D</sub>	= 10 A		18		S
CHARGES, CAPACITANCES AND GA	TE RESISTANO	CE				•	
Input Capacitance	C <sub>ISS</sub>	V <sub>GS</sub> = 0 V, f = 1.0 MHz, V <sub>DS</sub> = 25 V			1450		pF
Output Capacitance	C <sub>OSS</sub>				230		
Reverse Transfer Capacitance	C <sub>RSS</sub>				95		
Total Gate Charge	Q <sub>G(TOT)</sub>				40		nC
Threshold Gate Charge	Q <sub>G(TH)</sub>				1.7		
Gate-to-Source Charge	$Q_{GS}$	V <sub>GS</sub> = 10 V, V <sub>DS</sub> = 8	0 V, I <sub>D</sub> = 32 A		8.0		
Gate-to-Drain Charge	$Q_{GD}$		ļ		20		
Plateau Voltage	$V_{GP}$		ļ		5.9		V
Gate Resistance	$R_{G}$				1.9		Ω
SWITCHING CHARACTERISTICS (No	te 4)		•				
Turn-On Delay Time	t <sub>d(on)</sub>				11		ns
Rise Time	t <sub>r</sub>	V <sub>GS</sub> = 10 V, V <sub>DI</sub>	n = 80 V.		52		
Turn-Off Delay Time	t <sub>d(off)</sub>	$I_D = 32 \text{ A}, R_G$	= 6.1 Ω		38		
Fall Time	t <sub>f</sub>	1 1			48		
DRAIN-SOURCE DIODE CHARACTE	RISTICS		•				
Forward Diode Voltage	$V_{SD}$		T <sub>J</sub> = 25°C		0.87	1.2	V
		$V_{GS} = 0 \text{ V}, I_{S} = 32 \text{ A}$	T <sub>J</sub> = 125°C		0.76		
Reverse Recovery Time	t <sub>RR</sub>				68		ns
Charge Time	Ta	V <sub>GS</sub> = 0 V, dI <sub>S</sub> /dt = 100 A/μs,			51		
Discharge Time	T <sub>b</sub>	$I_{\rm S} = 32$			16		1
Reverse Recovery Charge	Q <sub>RR</sub>				195		nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

2. Surface mounted on FR4 board using 1 in sq pad size (Cu area = 1.127 in sq [1 oz] including traces).

Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.
 Switching characteristics are independent of operating junction temperatures.

#### **TYPICAL CHARACTERISTICS**

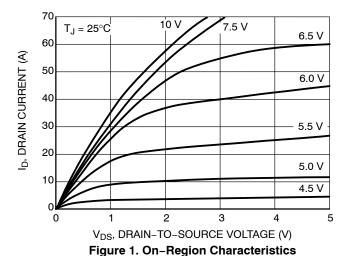

70  $V_{DS} \ge 10 V$ 60 ID, DRAIN CURRENT (A) 50 40 30 20 = 25°C 125°C 10 -55°Ċ 0 2 5 8 V<sub>GS</sub>, GATE-TO-SOURCE VOLTAGE (V) Figure 2. Transfer Characteristics


0.07 1<sub>D</sub> = 32 A T<sub>J</sub> = 25°C 1<sub>D</sub> = 32 A T<sub>J</sub> = 25°C

 $\mathsf{R}_{\mathsf{DS}(\mathsf{on})},\,\mathsf{DRAIN-TO-SOURCE}\;\mathsf{RESISTANCE}\;(\Omega)$ 0.10  $V_{GS} = 10^{'}V$ Γ<sub>J</sub> = 175°C 0.08 Т<sub>Ј</sub> = 125°С 0.06 0.04  $T_J = 25^{\circ}C$ 0.02  $T_{.1} = -55^{\circ}C$ 10 15 20 25 30 35 I<sub>D</sub>, DRAIN CURRENT (A)

V<sub>GS</sub>, GATE-TO-SOURCE VOLTAGE (V)

Figure 3. On-Region versus Gate Voltage









Figure 5. On–Resistance Variation with Temperature

Figure 6. Drain-to-Source Leakage Current versus Voltage

#### **TYPICAL CHARACTERISTICS**

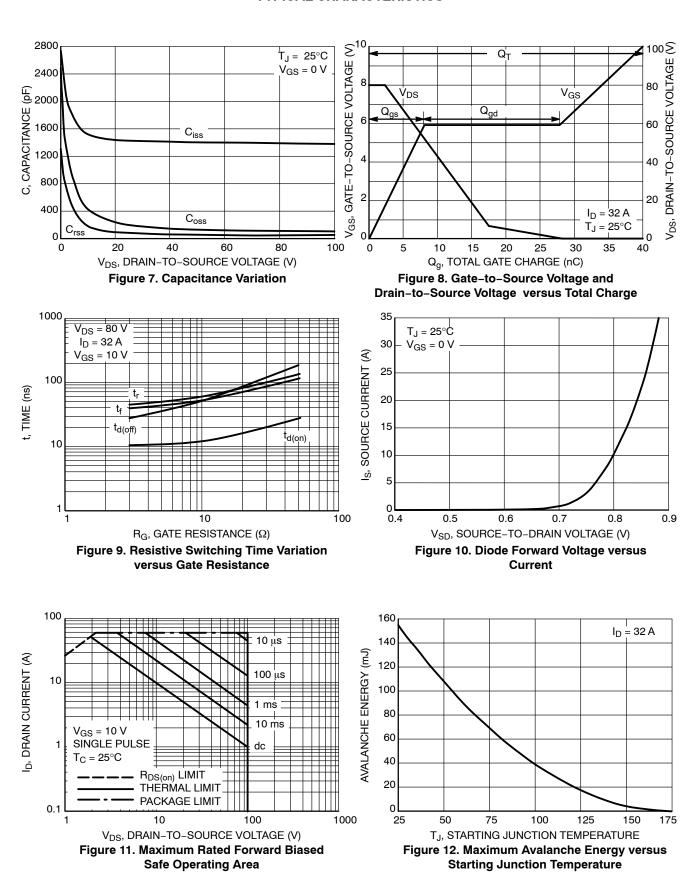

#### **TYPICAL CHARACTERISTICS**

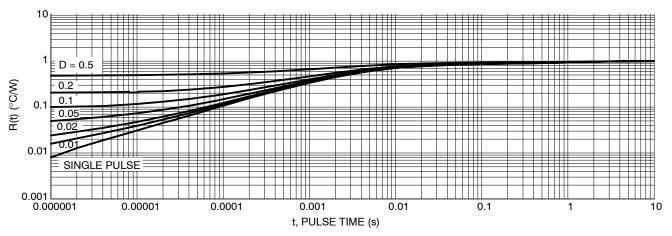


Figure 13. Thermal Response

#### **ORDERING INFORMATION**

Device	Package	Shipping†
NTD6414ANT4G	DPAK (Pb-Free)	2500 / Tape & Reel

#### **DISCONTINUED** (Note 5)

NTD6414AN-1G	IPAK (Pb-Free)	75 Units / Rail
NVD6414ANT4G*	DPAK (Pb-Free)	2500 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

<sup>\*</sup>NVD Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

<sup>5.</sup> **DISCONTINUED:** These devices are not recommended for new design. Please contact your **onsemi** representative for information. The most current information on these devices may be available on <a href="https://www.onsemi.com">www.onsemi.com</a>.






# **DPAK INSERTION MOUNT**

CASE 369 ISSUE O

**DATE 02 JAN 2000** 



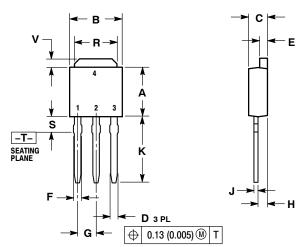

- NOTES:
  1. DIMENSIONING AND TOLERANCING PER ANSI
- Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIN	IETERS
DIM	MIN MAX		MIN	MAX
Α	0.235	0.250	5.97	6.35
В	0.250	0.265	6.35	6.73
С	0.086	0.094	2.19	2.38
D	0.027	0.035	0.69	0.88
Е	0.033	0.040	0.84	1.01
F	0.037	0.047	0.94	1.19
G	0.090	BSC	2.29	BSC
Н	0.034	0.040	0.87	1.01
J	0.018	0.023	0.46	0.58
K	0.350	0.380	8.89	9.65
R	0.175	0.215	4.45	5.46
S	0.050	0.090	1.27	2.28
٧	0.030	0.050	0.77	1.27

STYLE 1:		STYLE 2:		STYLE 3:		STYLE 4:		STYLE 5:		STYLE 6:	
PIN 1.	BASE	PIN 1.	GATE	PIN 1.	ANODE	PIN 1.	CATHODE	PIN 1.	GATE	PIN 1.	MT1
2.	COLLECTOR	2.	DRAIN	2.	CATHODE	2.	ANODE	2.	ANODE	2.	MT2
3.	EMITTER	3.	SOURCE	3.	ANODE	3.	GATE	3.	CATHODE	3.	GATE
4.	COLLECTOR	4.	DRAIN	4.	CATHODE	4.	ANODE	4.	ANODE	4.	MT2

DOCUMENT NUMBER:	98ASB42319B	Electronic versions are uncontrolled except when accessed directly from the Do Printed versions are uncontrolled except when stamped "CONTROLLED COPY"			
DESCRIPTION:	DPAK INSERTION MOUNT		PAGE 1 OF 1		

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.




# **DPAK (SINGLE GUAGE)** CASE 369AA **ISSUE B**

**DATE 03 JUN 2010** 

#### NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
- 2. CONTROLLING DIMENSION: INCHES.
  3. THERMAL PAD CONTOUR OPTIONAL WITHIN DI-MENSIONS b3, L3 and Z.
  4. DIMENSIONS D AND E DO NOT INCLUDE MOLD
- FLASH, PROTRUSIONS, OR BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.006 INCHES PER SIDE
- DIMENSIONS D AND E ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
- 6. DATUMS A AND B ARE DETERMINED AT DATUM PLANE H.

	INC	HES	MILLIN	IETERS
DIM	MIN	MAX	MIN	MAX
Α	0.086	0.094	2.18	2.38
A1	0.000	0.005	0.00	0.13
b	0.025	0.035	0.63	0.89
b2	0.030	0.045	0.76	1.14
b3	0.180	0.215	4.57	5.46
С	0.018	0.024	0.46	0.61
c2	0.018	0.024	0.46	0.61
D	0.235	0.245	5.97	6.22
E	0.250	0.265	6.35	6.73
е	0.090	BSC	2.29 BSC	
Н	0.370	0.410	9.40	10.41
L	0.055	0.070	1.40	1.78
L1	0.108 REF		2.74 REF	
L2	0.020 BSC		0.51 BSC	
L3	0.035	0.050	0.89	1.27
L4		0.040		1.01
Z	0.155		3.93	

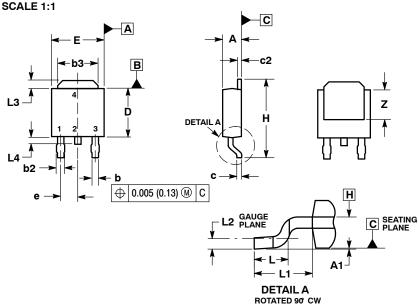

# STYLE 1: PIN 1. BASE

STYLE 5:

2. COLLECTOR 3. EMITTER 4. COLLECTOR

# STYLE 2: PIN 1. GATE

2. DRAIN 3. SOURCE 4. DRAIN

#### STYLE 3: PIN 1. ANODE


2. CATHODE 3. ANODE CATHODE

# STYLE 4: PIN 1. CATHODE 2. ANODE 3. GATE




STYLE 6: PIN 1. MT1 2. MT2 3. GATE STYLE 7: PIN 1. GATE 2. COLLECTOR 3. EMITTER COLLECTOR

# **SOLDERING FOOTPRINT\***

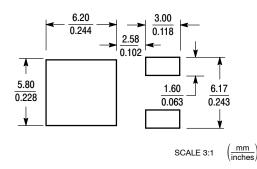

\*For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# **GENERIC** MARKING DIAGRAM\*



XXXXXX = Device Code Α = Assembly Location L = Wafer Lot ٧ = Year = Work Week WW = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part

DOCUMENT NUMBER:	98AON13126D	Electronic versions are uncontrolled except when accessed directly from the Docum Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in re-		
DESCRIPTION:	DPAK (SINGLE GAUGE)		PAGE 1 OF 1	

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries, onsemi reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="https://www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

# ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales