

- 2" x 1" x 0.4" metal package
- Ultra wide 4:1 input voltage range
9–36, 18–75, 43–160 VDC
- EN 50155 approval for railway applications
- Thermal shock and vibration resistant according EN 61373
- High efficiency up to 92%
- Operating temperature range
–40°C to +85°C
- Under voltage lock-out circuit
- Remote On/Off and Output voltage adjustable
- 3-year product warranty



The TEN 40WIR series is a family of high performance 40 Watt DC/DC converter modules featuring ultra wide 4:1 input voltage ranges in a 2" x 1" x 0.4" package with industry-standard footprint. Input voltages up to 160 VDC, excellent EMC characteristics and EN 50155 approval make this product the best choice for many demanding applications in railroad and transportation systems. Further standard features include remote On/Off, over voltage protection, under voltage lockout and short circuit protection. Low input current characteristics at minimal load make these converters also the ideal solution for battery-operated systems. Typical applications are in wireless networks, telecom/datacom, industry control systems and measurement equipment.

Models						
Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I _{max}	Vnom	I _{max}	
TEN 40-2410WIR	9 - 36 VDC (24 VDC nom.)	3.3 VDC	10'000 mA			90 %
TEN 40-2411WIR		5 VDC	8'000 mA			91 %
TEN 40-2412WIR		12 VDC	3'333 mA			92 %
TEN 40-2413WIR		15 VDC	2'666 mA			92 %
TEN 40-2415WIR		24 VDC	1'666 mA			91 %
TEN 40-2422WIR		+12 VDC	1'666 mA	–12 VDC	1'666 mA	90 %
TEN 40-2423WIR		+15 VDC	1'333 mA	–15 VDC	1'333 mA	90 %
TEN 40-2425WIR		+24 VDC	833 mA	–24 VDC	833 mA	91 %
TEN 40-4810WIR	18 - 75 VDC (48 VDC nom.)	3.3 VDC	10'000 mA			90 %
TEN 40-4811WIR		5 VDC	8'000 mA			91 %
TEN 40-4812WIR		12 VDC	3'333 mA			92 %
TEN 40-4813WIR		15 VDC	2'666 mA			92 %
TEN 40-4815WIR		24 VDC	1'666 mA			91 %
TEN 40-4822WIR		+12 VDC	1'666 mA	–12 VDC	1'666 mA	90 %
TEN 40-4823WIR		+15 VDC	1'333 mA	–15 VDC	1'333 mA	90 %
TEN 40-4825WIR		+24 VDC	833 mA	–24 VDC	833 mA	91 %
TEN 40-7210WIR	43 - 160 VDC (110 VDC nom.)	3.3 VDC	10'000 mA			88 %
TEN 40-7211WIR		5 VDC	8'000 mA			89 %
TEN 40-7212WIR		12 VDC	3'333 mA			91 %
TEN 40-7213WIR		15 VDC	2'666 mA			91 %
TEN 40-7215WIR		24 VDC	1'666 mA			90 %
TEN 40-7222WIR		+12 VDC	1'666 mA	–12 VDC	1'666 mA	89 %
TEN 40-7223WIR		+15 VDC	1'333 mA	–15 VDC	1'333 mA	89 %
TEN 40-7225WIR		+24 VDC	833 mA	–24 VDC	833 mA	91 %

Options

TEN-HS1	- Optional Heat Sink with Height = 0.22 inch: www.tracopower.com/overview/ten-hs1
TEN-HS8	- Optional Heat Sink with Height = 0.3 inch: www.tracopower.com/overview/ten-hs8
on demand (backorder with MOQ non stocking item)	- Optional Heat Sink with Height = 0.8 inch: www.tracopower.com/overview/ten-hs10
	- Optional Heat Sink with Height = 0.5 inch: www.tracopower.com/overview/ten-hs9

Note - The outputs of the ± 24 Vout models can also be used in serial circuit for 48 VDC operation. Free-wheeling diodes are not necessary but recommended for increased performance for start-up with inductive / capacitive load operation.

Input Specifications

Input Current	- At no load	24 Vin models: 15 mA typ. 48 Vin models: 10 mA typ. 110 Vin models: 10 mA typ.
Surge Voltage		24 Vin models: 50 VDC max. (1 s max.) 48 Vin models: 100 VDC max. (1 s max.) 110 Vin models: 170 VDC max. (1 s max.)
Under Voltage Lockout		24 Vin models: 7.5 VDC min. / 8 VDC typ. / 8.8 VDC max. 48 Vin models: 15 VDC min. / 16 VDC typ. / 17.5 VDC max. 110 Vin models: 37 VDC min. / 40 VDC typ. / 42 VDC max.
Reflected Ripple Current		20 mAp-p typ.
Recommended Input Fuse		24 Vin models: 8'000 mA (fast acting) 48 Vin models: 4'000 mA (slow blow) 110 Vin models: 3'150 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Pi-Type

Output Specifications

Output Voltage Adjustment		-10% to +20% (15 & 24 Vout models) $\pm 10\%$ (other models) (single output models only) (By external trim resistor) See application note: www.tracopower.com/ten40wir-adj/ Output power must not exceed rated power!
Voltage Set Accuracy		$\pm 1\%$ max.
Regulation	- Input Variation (Vmin - Vmax)	single output models: 0.2% max. dual output models: 0.2% max.
	- Load Variation (0 - 100%)	single output models: 0.5% max. dual output models: 1% max. (Output 1) 1% max. (Output 2)
	- Cross Regulation (25% / 100% asym. load)	dual output models: 5% max.
Ripple and Noise	- 20 MHz Bandwidth	100 mVp-p max. (3.3 & 5 Vout) 75 mVp-p typ. (3.3 & 5 Vout) 125 mVp-p max. (12, ± 12 , 15 & ± 15 Vout) 100 mVp-p typ. (12, ± 12 , 15 & ± 15 Vout) 200 mVp-p max. (24 & ± 24 Vout) 150 mVp-p typ. (24 & ± 24 Vout) 125 mVp-p max. (± 12 & ± 15 Vout) 100 mVp-p typ. (± 12 & ± 15 Vout) (with 0.1 μ F, 50 V X7R)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Capacitive Load	- single output	3.3 Vout models:	26'600 µF max.
		5 Vout models:	20'000 µF max.
		12 Vout models:	3'900 µF max.
		15 Vout models:	2'600 µF max.
		24 Vout models:	1'300 µF max.
	- dual output	12 / -12 Vout models:	2'600 / 2'600 µF max.
		15 / -15 Vout models:	1'600 / 1'600 µF max.
		24 / -24 Vout models:	650 / 650 µF max.
Minimum Load			Not required
Temperature Coefficient			±0.02 %/K max.
Hold-up Time			10 ms min. (acc. to EN 50155 Class S2, see application note for ext. capacitor calculation: www.tracopower.com/info/holdup_en50155.pdf)
Start-up Time			60 ms typ.
Short Circuit Protection			Continuous, Automatic recovery
Overload Protection			Indefinite Mode
Output Current Limitation			125 - 210% of Iout max.
			150% typ. of Iout max.
Overvoltage Protection			125% typ. of Vout nom. (By Zener diode)
Transient Response	- Response Deviation		10% max. (25% Load Step)
	- Response Time		250 µs typ. (25% Load Step)

Safety Specifications

Standards	- IT / Multimedia Equipment	EN 60950-1
		EN 62368-1
		IEC 60950-1
		IEC 62368-1
		UL 60950-1
		UL 62368-1
	- Railway Applications	EN 50155
	- Certification Documents	www.tracopower.com/ten40wir-safety-cert/
Energy Source	- Output, acc. to 62368-1	ES1
Power Source	- Output, acc. to 62368-1	PS3
Pollution Degree		PD 2
Over Voltage Category		Not mains connected

EMC Specifications

EMI (Emissions)	- Conducted Emissions	EN 50121-3-2 (EMC for Rolling Stock)
		EN 55032 class A (with external filter)
		EN 55032 class B (with external filter)
		EN 55032 class A (with external filter)
		EN 55032 class B (with external filter)
	- Radiated Emissions	
External filter proposal: www.tracopower.com/ten40wir-emc-filter/		

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

EMS (Immunity)	- Electrostatic Discharge	Air: EN 50121-3-2 (EMC for Rolling Stock)
	- RF Electromagnetic Field	Contact: EN 61000-4-2, ± 8 kV, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-2, ± 6 kV, perf. criteria A
		EN 61000-4-3, 20 V/m, perf. criteria A
		EN 61000-4-4, ± 2 kV, perf. criteria A
		EN 61000-4-5, ± 2 kV, perf. criteria A
		Ext. input component: 220 μ F, 100 V, KY SMDJ58A (24 Vin)
		220 μ F, 100 V, KY SMDJ120A (48 Vin)
		2x 150 μ F, 200 V, KXJ 2x SMDJ90A in series (110 Vin)
	- Conducted RF Disturbances	EN 61000-4-6, 10 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 100 A/m, perf. criteria A
		1 s: EN 61000-4-8, 1000 A/m, perf. criteria A
EMC / Environmental	- Certification Documents	www.tracopower.com/ten40wir-emc-cert/

General Specifications		
Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +85°C
		-40°C to +87°C (with heatsink TEN-HS1)
		-40°C to +90°C (with heatsink TEN-HS8)
		-40°C to +92°C (with heatsink TEN-HS9)
		-40°C to +95°C (with heatsink TEN-HS10)
	- Case Temperature	+105°C max.
	- Storage Temperature	-55°C to +125°C
Power Derating	- High Temperature	Depending on model
		See application note: www.tracopower.com/ten40wir-cc/
Cooling System		Natural convection (20 LFM)
Remote Control	- Voltage Controlled Remote (passive = on)	On: 3.0 to 12 VDC or open circuit
		Off: 0 to 1.2 VDC or short circuit
	- Off Idle Input Current	Refers to 'Remote' and '-Vin' Pin
	- Remote Pin Input Current	3 mA max.
Altitude During Operation		-0.5 to 0.5 mA
Regulator Topology		5'000 m max.
Switching Frequency		Flyback Converter
		225 - 275 kHz (PWM)
		250 kHz typ. (PWM)
Insulation System		Functional Insulation
Isolation Test Voltage	- Input to Output, 60 s	3'000 VDC (110 Vin models)
		1'600 VDC (other models)
Isolation Resistance	- Input to Output, 500 VDC	1'000 M Ω min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	1'500 pF max.
Reliability	- Calculated MTBF	900'000 h (MIL-HDBK-217F, ground benign)
Washing Process		According to Cleaning Guideline
		www.tracopower.com/info/cleaning.pdf
Environment	- Vibration	MIL-STD-810F
		EN 61373
	- Mechanical Shock	MIL-STD-810F
		EN 61373
	- Thermal Shock	MIL-STD-810F
	- Flammability	EN 45545-2
		www.tracopower.com/info/en45545-declaration.pdf
Housing Material		Copper
Base Material		Non-conductive FR4 (UL 94 V-0 rated)
Potting Material		Silicone (UL 94 V-0 rated)
Pin Material		Copper
Pin Foundation Plating		Nickel (2 - 3 μ m)
Pin Surface Plating		Tin (3 - 5 μ m), matte


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Housing Type	Metal Case
Mounting Type	PCB Mount
Connection Type	THD (Through-Hole Device)
Footprint Type	2" x 1"
Soldering Profile	Lead-Free Wave Soldering 265°C / 10 s max.
Weight	32 g
Thermal Impedance	- Case to Ambient 10.8 K/W typ. 10.3 K/W typ. (with heatsink TEN-HS1)
Environmental Compliance	- REACH Declaration www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7(a), 7(c)-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).) - RoHS Declaration - SCIP Reference Number 00c7ae30-3d8c-4682-88e1-0d2e69ce3142

Additional Information

Supporting Documents	www.tracopower.com/overview/ten40wir
Frequently Asked Questions	www.tracopower.com/glossary-faq
Glossary	www.tracopower.com/info/glossary.pdf
Service Portal	www.tracoserviceportal.com

Outline Dimensions

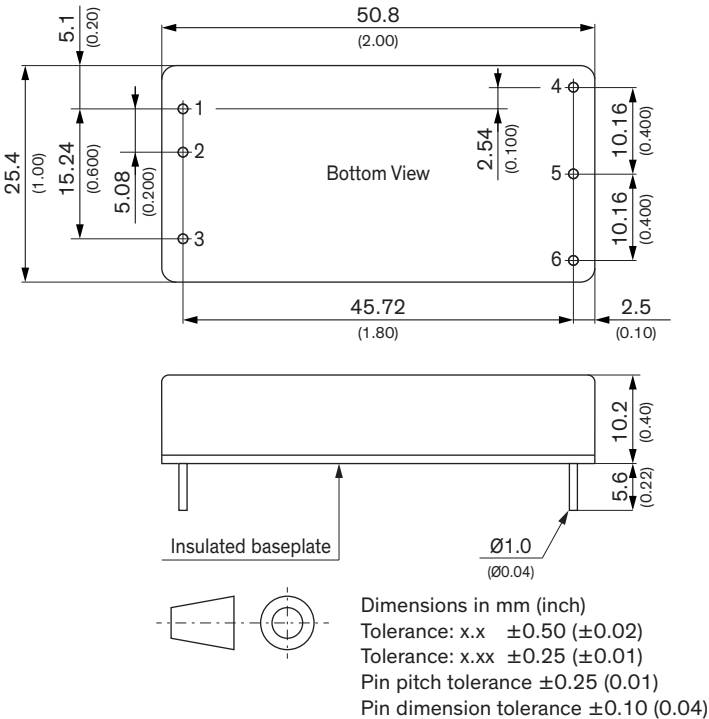

Pinout		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	Remote On/Off	Remote On/Off
4	+Vout	+Vout
5	-Vout	Common
6	Trim	-Vout

Avoid routing PCB traces under the converter.