
PCB terminal block; 6 mm²; Pin spacing 7.5 mm; 12-pole; Push-in CAGE CLAMP®;

6,00 mm²; gray

https://www.wago.com/2626-1112/020-000





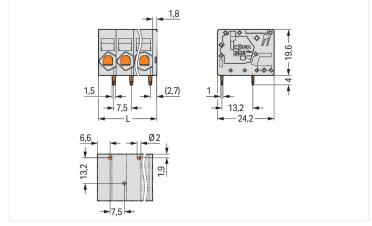



Color: ■ gray

Similar to illustration

Dimensions in mm

L = (pole no. - 1) x pin spacing + 9.3 mm

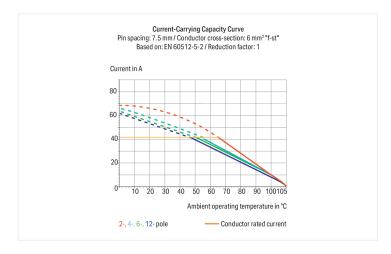

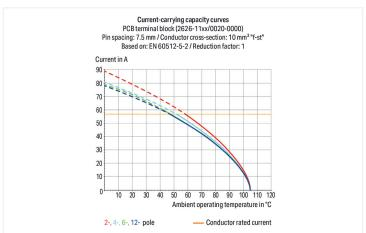

PCB terminal block, 2626 Series, solder pin dimensions 1.5 x 1 mm

This PCB terminal block (item number 2626-1112/020-000) is designed for quick and easy connections. It is a universal connector that can be used almost anywhere, e.g., as a pluggable PCB connector, panel feedthrough header, connector for rail-mount terminal blocks, or a floating connector for different mounting methods. Rated current and voltage are key factors to consider when choosing a PCB terminal block, as they determine the product's suitability for different applications. This product has a rated voltage of 1000 V and a rated current of 48 A, making it suitable for high-load applications. Ensure that the strip lengths are between 13 mm and 15 mm when connecting conductors to this PCB terminal block. This product incorporates one conductor terminal and utilizes Push-in CAGE CLAMP®. Push-in CAGE CLAMP® technology provides a universal connection solution for all conductor types. It allows both solid and fine-stranded conductors with ferrules to be inserted directly into the clamping point without the need for tools. The dimensions are 91.8 x 23.6 x 24.2 mm (width x height x depth). This PCB terminal block is suitable for conductor cross sections ranging from 0.2 mm² to 10 mm². Up to twelve potentials / twelve poles can be connected to this terminal strip using twelve clamping points on one level. The gray housing is made of polyamide (PA66) for insulation, the clamping spring is made of chrome-nickel spring steel (CrNi), and the contacts are made of electrolytic copper (ECu). Tin is used for coating the contact surfaces. An operating tool is used to operate this PCB terminal block. THT is used to assemble the PCB terminal block. These PCB terminal blocks are mounted using feed-through mounts.. The conductor is designed to be inserted into the board at a 0° angle.. The solder pins, which are 1.5 x 1 mm in cross-section and 4 mm long, are set out over the entire terminal strip (staggered). There are one solder pin per potential.

https://www.wago.com/2626-1112/020-000



Notes

Variants:

Other pole numbers Direct marking Other colors

Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/.

Electrical data					
Ratings per	IEC/EN 60664-1				
Overvoltage category	III	III	II		
Pollution degree	3	2	2		
Nominal voltage	1000 V	1000 V	1000 V		
Rated surge voltage	8 kV	8 kV	8 kV		
Rated current	48 A	48 A	48 A		

Approvals per	UL 1059		
Use group	В	С	D
Rated voltage	600 V	600 V	-
Rated current	38 A	38 A	-

12

Approvals per	CSA		
Use group	В	С	D
Rated voltage	600 V	600 V	-
Rated current	31 A	31 A	-

Connection data				
Clamping units	12		Connection 1	
Total number of potentials	12		Connection technology	Push-in CAGE CLAMP®
Number of connection types	1		Actuation type	Operating tool
Number of levels	1		Solid conductor	0.2 10 mm² / 24 8 AWG
			Fine-stranded conductor	0.2 10 mm² / 24 8 AWG
			Fine-stranded conductor; with insulated ferrule	0.25 6 mm²
			Fine-stranded conductor; with uninsulated ferrule	0.25 6 mm²
			Fine-stranded conductor; with twin ferrule	0.25 2.5 mm ²
			Strip length	13 15 mm / 0.51 0.59 inches
			Conductor connection direction to PCB	0°

Physical data	
Pin spacing	7.5 mm / 0.295 inches
Width	91.8 mm / 3.614 inches
Height	23.6 mm / 0.929 inches
Height from the surface	19.6 mm / 0.772 inches
Depth	24.2 mm / 0.953 inches
Solder pin length	4 mm
Solder pin dimensions	1.5 x 1 mm
Drilled hole diameter with tolerance	2 (+0.1) mm

Pole number

https://www.wago.com/2626-1112/020-000



Mechanical data

Mounting type Feed-through mounting

PCB contact

PCB contact THT

Solder pin arrangement over the entire terminal strip (staggered)

Number of solder pins per potential

Material data

Note (material data)

Information on material specifications can be found here

Color gri

Material group I

Insulation material (main housing) Polyamide (PA66)

Flammability class per UL94

Clamping spring material Chrome-nickel spring steel (CrNi)

Contact material Electrolytic copper (E_{Cu})

Contact Plating Tin

Fire load 0.019 MJ

Weight 46.1 g

Environmental requirements

Limit temperature range -60 ... +105 °C

Processing temperature -35 ... +60 °C

Continuous operating temperature -60 ... +105 °C

Commercial data

 PU (SPU)
 16 pcs

 Packaging type
 Box

 Country of origin
 PL

 GTIN
 4066966505825

 Customs tariff number
 85369010000

Product classification

UNSPSC 39121409
eCl@ss 10.0 27-44-04-01
eCl@ss 9.0 27-44-04-01
ETIM 9.0 EC002643
ETIM 8.0 EC002643
ECCN NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status Compliant,No Exemption

https://www.wago.com/2626-1112/020-000



Approvals / Certificates

General approvals





Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 60947-7-4	NL-103311
CSA CSA Group	C22.2	70146882
KEMA/KEUR DEKRA Certification B.V.	EN 60947-7-4	71-113203
UL Underwriters Laboratories Inc.	UL 1059	E45172

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product
Compliance
2626-1112/020-000

onmental Product pliance L-1112/020-000

Documentation

Additional Information

Technical Section pdf
03.04.2019 2027.26 KB

CA	D/	CA	E-	Da	ta
. , ,	'	U , 1	_	u	···

CAD data

2D/3D Models 2626-1112/020-000 CAE data

ZUKEN Portal 2626-1112/020-000

PCB Design

Symbol and Footprint via SamacSys 2626-1112/020-000



https://www.wago.com/2626-1112/020-000



1 Compatible Products

1.1 Optional Accessories

1.1.1 Tool

1.1.1.1 Operating tool



Item No.: 210-721

Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination



Insert fine-stranded conductors and remove all conductor types via operating tool.

Conductor termination



Insert solid conductors via push-in termination.

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at:: $\underline{www.wago.com}$