Powered-off Protection, High Speed, 1.65 V to 5.5 V, SPDT Analog Switch (2:1 Multiplexer / Demultiplexer Bus Switch)

DESCRIPTION

The DG3157E is a high speed single-pole double-throw analog switch designed for +1.65 V to +5.5 V single power rail operation.

Fabricated with high density CMOS technology, the DG3157E achieves low on-resistance, fast switching speed, and high bandwidth while maintains low power consumption.

The DG3157E can handle both analog and digital signals and permits signals with amplitudes of up to V+ to be transmitted in either direction.

When the select pin is low, B_0 is connected to the output A pin. When the select pin is high, B_1 is connected to the output A pin. The path that is open will have a high impedance state with respect to the output. Break before make switching performance is guaranteed.

A powered-off protection circuit is built into the switch to prevent an abnormal current flow from COM pin to V+ during the power-down condition. Each output pin can withstand greater than 7 kV (human body model).

Operation temperature is specified from -40 °C to +85 °C. The DG3157E is available in the compact SC-70-6L package.

FEATURES

- Direct cross to industry standard SN74LVC1G3157, NC7SB3157, NLASB3157, PI5A3157, and STG3157
- Low switch on-resistance (6 Ω)
- +1.65 V to +5.5 V single supply operation
- Powered-off protection
- Control logic inputs can go over V+ up to 5.5 V
- Low parasitic capacitance, 7 pF at switch off
- Break before make switching
- Latch-up performance exceeds 200 mA per JESD 78
- High ESD rating
  - 7000 V human body model (JS-001)
  - 1000 V charge device model (JS-002)
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

Pb-free

RoHS COMPLIANT


HALOGEN FREE

APPLICATIONS

- Battery powered devices
- Consumer and computing
- Instrumentation
- Medical equipment
- Control and automation

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

SC-70
6-Pin



Top view

Device marking: H0

TRUTH TABLE	
LOGIC INPUT (S)	FUNCTION
0	B_0 connected to A
1	B_1 connected to A

ORDERING INFORMATION		
TEMP. RANGE	PACKAGE	PART NUMBER
-40 °C to +85 °C	SC-70-6	DG3157EDL-T1-GE3 (halogen-free)

For technical questions, contact: analogswitchtechsupport@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Downloaded from Arrow.com.

ABSOLUTE MAXIMUM RATINGS

PARAMETER		LIMIT	UNIT
V+, A, B_0, B_1, S reference to GND		-0.3 to 6	V
Continuous current (any terminal)		± 50	mA
Peak current (pulsed at 1 ms, 10 % duty cycle)		± 200	
Storage temperature	D suffix	-65 to +150	°C
Power dissipation (packages) [a]	6-pin SC-70 [b]	250	mW
ESD / HBM	JS-001	7000	V
ESD / CDM	JS-002	1000	
Latch up	Per JESD78 with 1.5 x V_{abs} max. clamp	200	mA

Notes
a. All leads welded or soldered to PC board
b. Derate 3.1 mW/°C above 70 °C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

SPECIFICATIONS

PARAMETER	SYMBOL	TEST CONDITIONS UNLESS OTHERWISE SPECIFIED V_S = 0.25 V+ or 0.75 V+, V+ = 1.65 V to 1.95 V [e] V_S = 0.2 V+ or 0.65 V+, V+ = 2.3 V to 5.5 V [e]		TEMP. [a]	LIMITS -40 °C to +85 °C MIN. [b]	TYP. [c]	MAX. [b]	UNIT
DC Characteristics								
High level input voltage	V_{SH}	V+ = 1.65 V to 1.95 V		Full	0.75 V+	-	-	V
		V+ = 2.3 V to 5.5 V		Full	0.65 V+	-	-	
Low level input voltage	V_{SL}	V+ = 1.65 V to 1.95 V		Full	-	-	0.25 V+	
		V+ = 2.3 V to 5.5 V		Full	-	-	0.2 V+	
On resistance	R_{ON}	V+ = 4.5 V	V_{BN} = 0 V, I_A = 30 mA	Full	-	8	11	Ω
			V_{BN} = 2.3 V, I_A = -30 mA	Full	-	6	9	
			V_{BN} = 4.5 V, I_A = -30 mA	Full	-	7	9	
		V+ = 3 V	V_{BN} = 0 V, I_A = 24 mA	Full	-	10	14	
			V_{BN} = 3 V, I_A = -24 mA	Full	-	9	12	
		V+ = 2.3 V	V_{BN} = 0 V, I_A = 8 mA	Full	-	13	18	
			V_{BN} = 2.3 V, I_A = -8 mA	Full	-	12	16	
		V+ = 1.65 V	V_{BN} = 0 V, I_A = 4 mA	Full	-	20	26	
			V_{BN} = 1.65 V, I_A = -4 mA	Full	-	18	23	
On resistance flatness	R_{FLAT}	0 < V_{BN} < V+	V+ = 4.5 V, I_A = -30 mA	Room	-	2	-	
			V+ = 3 V, I_A = -24 mA	Room	-	4	-	
			V+ = 2.3 V, I_A = -8 mA	Room	-	10	-	
			V+ = 1.65 V, I_A = -4 mA	Room	-	58	-	
On resistance matching between channels	ΔR_{ON}	V+ = 4.5 V, V_{BN} = 3.15 V, I_A = -30 mA		Room	-	0.09	-	
		V+ = 3 V, V_{BN} = 2.1 V, I_A = -24 mA		Room	-	0.13	-	
		V+ = 2.3 V, V_{BN} = 1.6 V, I_A = -8 mA		Room	-	0.15	-	
		V+ = 1.65 V, V_{BN} = 1.15 V, I_A = -4 mA		Room	-	0.16	-	
Input leakage current	I_S	V+ = 5.5 V, V_S = 5.5 V		Room	-0.1	-	0.1	µA
				Full	-1	-	1	
Off stage switch leakage	$I_{BN(off)}$	V+ = 5.5 V, V_A = 1 V / 4.5 V, V_B = 4.5 V / 1 V		Room	-0.1	-	0.1	
				Full	-1	-	1	
On state switch leakage	$I_{BN(on)}$	V+ = 5.5 V, V_A = V_B = 1 V or 4.5 V		Room	-0.1	-	0.1	
				Full	-1	-	1	
Power down leakage	I_{PD}	V+ = 0 V, V_A = 5 V, B_0, B_1 open, V_S = GND		Full	-	-	5	
		V+ = 0 V, V_{B0}, V_{B1} = 5 V, A open, V_S = GND		Full	-	-	5	
Power Supply								
Power supply range	V+			Full	1.65	-	5.5	V
Quiescent supply current	I+	V+ = 5.5 V, V_S = V+ or GND		Room	-	-	1	µA
				Full	-	-	5	

For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

SPECIFICATIONS

PARAMETER	SYMBOL	TEST CONDITIONS UNLESS OTHERWISE SPECIFIED V_S = 0.25 V+ or 0.75 V+, V+ = 1.65 V to 1.95 V [e] V_S = 0.2 V+ or 0.65 V+, V+ = 2.3 V to 5.5 V [e]		TEMP. [a]	LIMITS -40 °C to +85 °C MIN. [b]	TYP. [c]	MAX. [b]	UNIT
AC Electrical Characteristics [e]								
Prop delay time [f]	t_{PHL}/t_{PLH}	V_A = 0 V, see Fig. 3	V+ = 1.65 V to 1.95 V	Full	-	4	-	ns
			V+ = 2.3 V to 2.7 V	Full	-	3	-	
			V+ = 3 V to 3.6 V	Full	-	2	-	
			V+ = 4.5 V to 5.5 V	Full	-	2	-	
Output enable time [f]	t_{PZL}/t_{PZH}	V_{LOAD} = 2 x V+ for t_{PZL}, V_{LOAD} = 0 V for t_{PZH}, see Fig. 4	V+ = 1.65 V to 1.95 V	Room	-	32	-	
				Full	-	34	-	
			V+ = 2.3 V to 2.7 V	Room	-	22	-	
				Full	-	23	-	
			V+ = 3 V to 3.6 V	Room	-	19	-	
				Full	-	20	-	
			V+ = 4.5 V to 5.5 V	Room	-	16	-	
				Full	-	16	-	
Output disable time [f]	t_{PLZ}/t_{PHZ}	V_{LOAD} = 2 x V+ for t_{PLZ}, V_{LOAD} = 0 V for t_{PHZ}, see Fig. 4	V+ = 1.65 V to 1.95 V	Room	-	22	-	
				Full	-	23	-	
			V+ = 2.3 V to 2.7 V	Room	-	18	-	
				Full	-	19	-	
			V+ = 3 V to 3.6 V	Room	-	16	-	
				Full	-	16	-	
			V+ = 4.5 V to 5.5 V	Room	-	13	-	
				Full	-	14	-	
Break-before-make time [d]	t_{BBM}	V+ = 1.65 V to 1.95 V		Full	0.5	-	-	
		V+ = 2.3 V to 2.7 V		Full	0.5	-	-	
		V+ = 3 V to 3.65 V		Full	0.5	-	-	
		V+ = 4.5 V to 5.5 V		Full	0.5	-	-	
Charge injection [d]	Q	C_L = 0.1 nF, V_{GEN} = 0 V R_{GEN} = 0 Ω	V+ = 5 V	Room	-	1.3	-	pC
			V+ = 3.3 V	Room	-	0.5	-	
Analog Switch Characteristics								
Off isolation [d]	OIRR	R_L = 50 Ω, f = 10 MHz		Room	-	-61	-	dB
Crosstalk [d]	X_{TALK}			Room	-	-61	-	
-3 dB bandwidth [d]	BW	R_L = 50 Ω		Room	-	580	-	MHz
Capacitance								
Control pin capacitance [d]	C_{IN}	V+ = 0 V		Room	-	6	-	pF
B port off capacitance [d]	C_{IO-B}	V+ = 5 V		Room	-	7	-	
A port capacitance when switch enable [d]	$C_{IO-A(on)}$			Room	-	12	-	

Notes

a. Room = 25 °C, full = as determined by the operating suffix
b. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this datasheet
c. Typical values are for design aid only, not guaranteed nor subject to production testing
d. Guarantee by design, nor subjected to production test
e. V_S = input voltage to perform proper function
f. Guaranteed by design and not production tested. The bus switch propagation delay is a function of the RC time constant contributed by the on-resistance and the specified load capacitance with an ideal voltage source (zero output impedance) driving the switch

For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

LOGIC DIAGRAM POSITIVE LOGIC



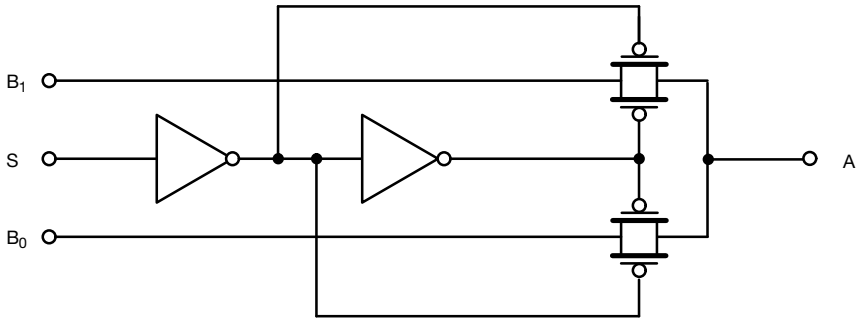


Fig. 1


TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

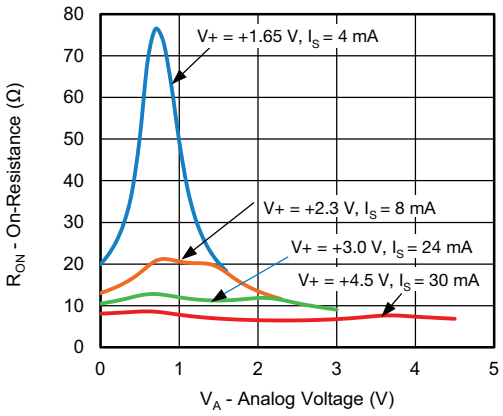

R_{ON} vs. V_A vs. V+

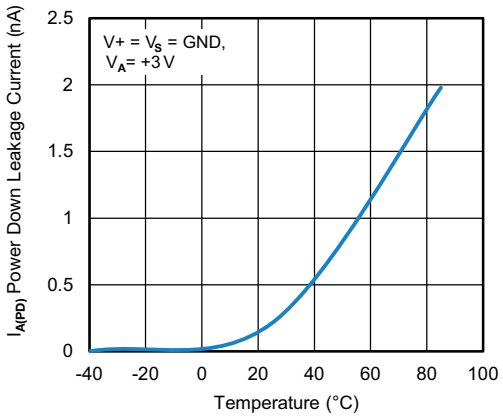


Power Down Leakage Current vs. Temperature

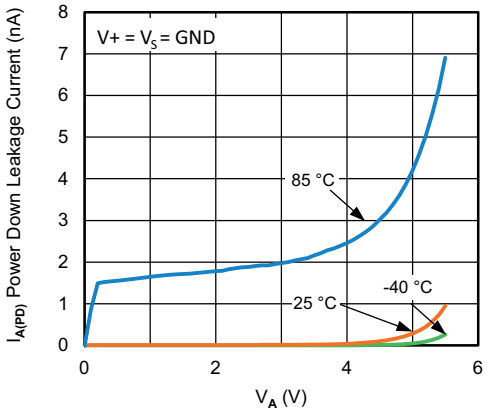

Power Down Leakage Current vs. V_A

For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

AC LOADING AND WAVEFORMS

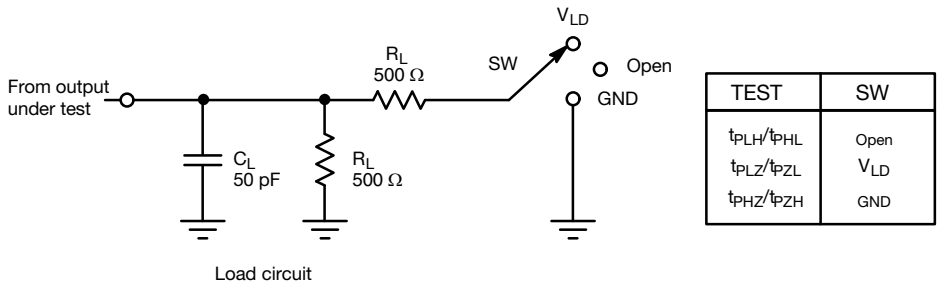

TEST	SW
t_{PLH}/t_{PHL}	Open
t_{PLZ}/t_{PZL}	V_{LD}
t_{PHZ}/t_{PZH}	GND

Fig. 2 - AC Test Circuit

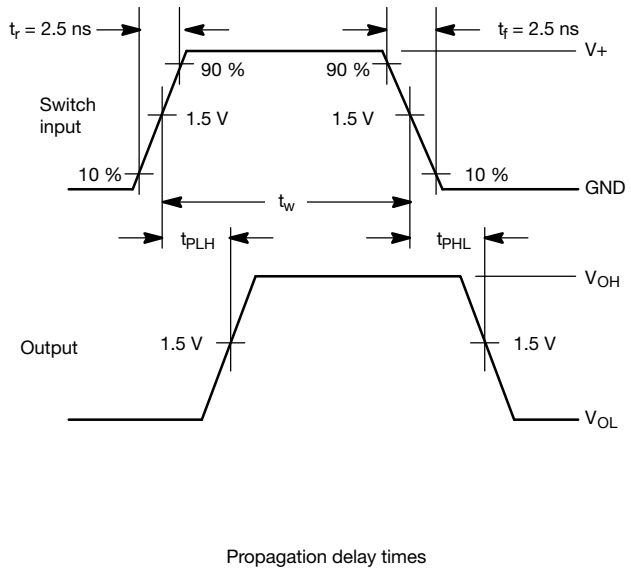


Fig. 3 - AC Waveforms

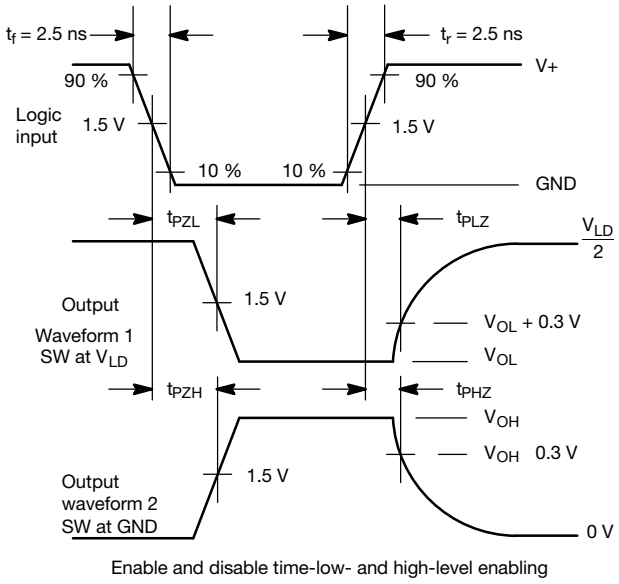



Fig. 4 - AC Waveforms

Notes

- C_L includes probe and jig capacitance
- Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control
- Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω
- The outputs are measured one at a time with one transition per measurement
- t_{PLZ} and t_{PHZ} are the same as t_{dis}
- t_{PZL} and t_{PZH} are the same as t_{dis}
- t_{PLH} and t_{PHL} are the same as t_{dis}
- V_{LD} = 2 V+


For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

TEST CIRCUITS

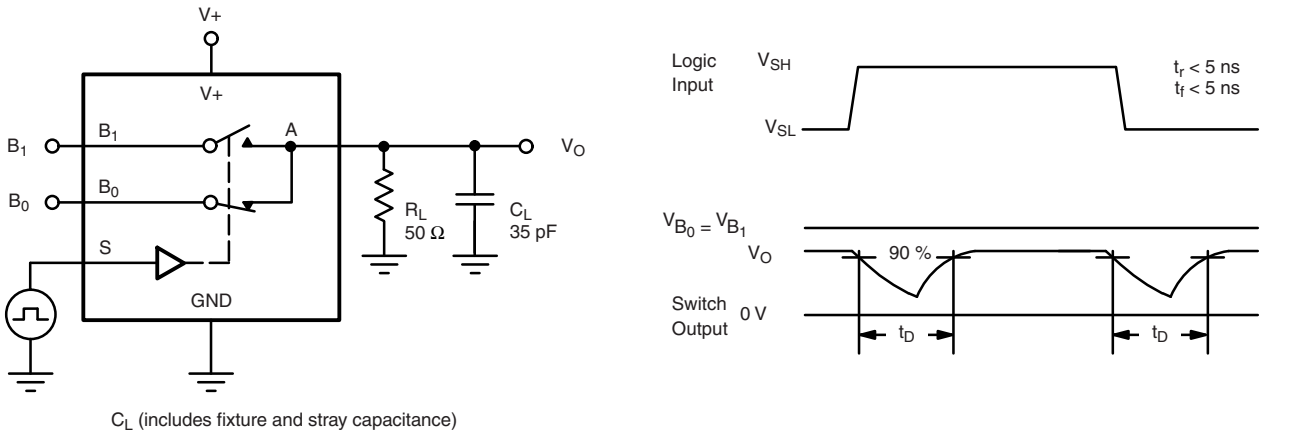

C_L (includes fixture and stray capacitance)

Fig. 5 - Break-Before-Make Interval

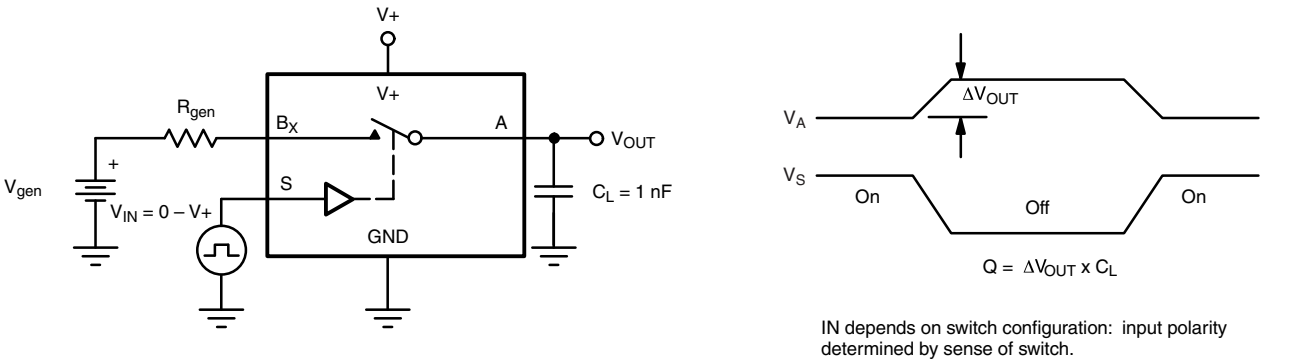

IN depends on switch configuration: input polarity determined by sense of switch.

Fig. 6 - Charge Injection

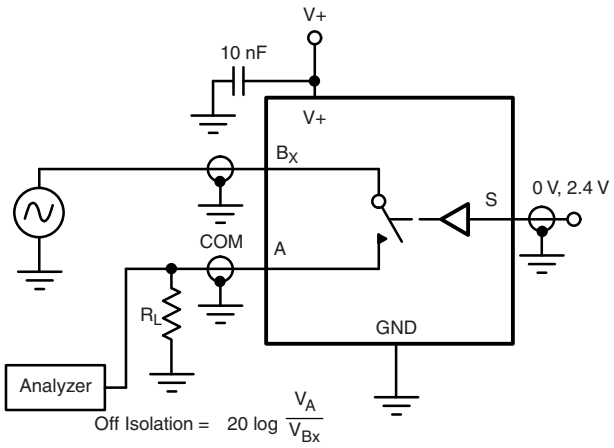


Fig. 7 - Off-Isolation

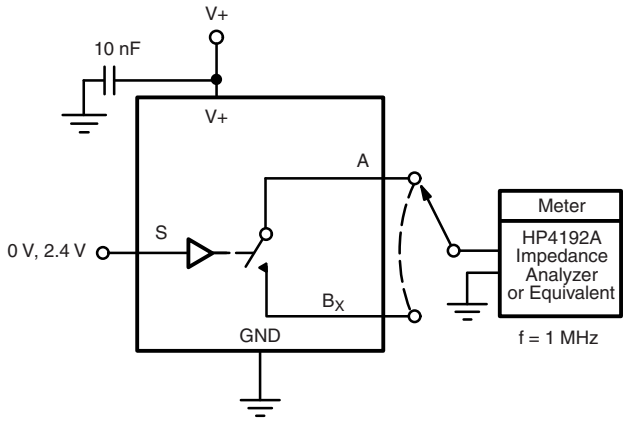


Fig. 8 - Channel Off/On Capacitance

For technical questions, contact: analogswitchtechsupport@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000
Downloaded from Arrow.com.

PRODUCT SUMMARY	
Part number	DG3157E
Status code	2
Configuration	SPDT x 1
Single supply min. (V)	1.65
Single supply max. (V)	5.5
Dual supply min. (V)	-
Dual supply max. (V)	-
On-resistance (Ω)	8
Charge injection (pC)	1.3
Source on capacitance (pF)	12
Source off capacitance (pF)	7
Leakage switch on typ. (nA)	-
Leakage switch off max. (nA)	100
-3 dB bandwidth (MHz)	580
Package	SC-70-6
Functional circuit / applications	Multi purpose, instrumentation, medical and healthcare, portable
Interface	Parallel
Single supply operation	Yes
Dual supply operation	-
Turn on time max. (ns)	-
Crosstalk and off isolation	-61


Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package / tape drawings, part marking, and reliability data, see www.vishay.com/ppg?76387.

For technical questions, contact: analogswitchtechsupport@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Downloaded from Arrow.com.

SC-70: 6-LEADS

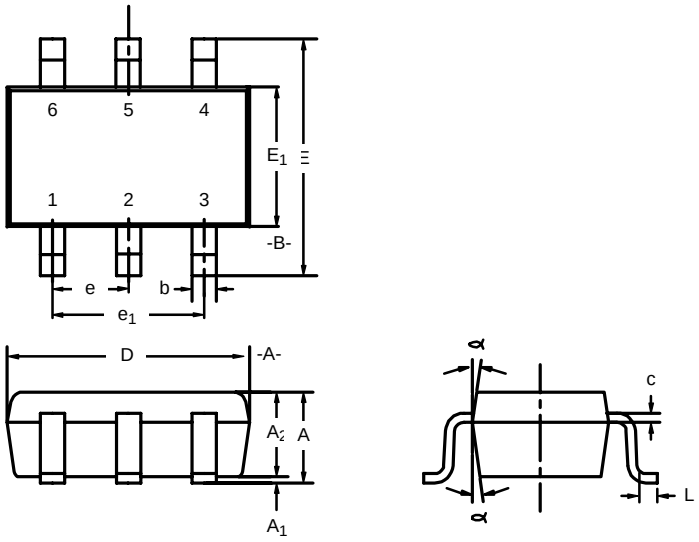


Dim	MILLIMETERS			INCHES		
	Min	Nom	Max	Min	Nom	Max
A	0.90	–	1.10	0.035	–	0.043
A_1	–	–	0.10	–	–	0.004
A_2	0.80	–	1.00	0.031	–	0.039
b	0.15	–	0.30	0.006	–	0.012
c	0.10	–	0.25	0.004	–	0.010
D	1.80	2.00	2.20	0.071	0.079	0.087
E	1.80	2.10	2.40	0.071	0.083	0.094
E_1	1.15	1.25	1.35	0.045	0.049	0.053
e	0.65BSC			0.026BSC		
e_1	1.20	1.30	1.40	0.047	0.051	0.055
L	0.10	0.20	0.30	0.004	0.008	0.012
α	7°Nom			7°Nom		

ECN: S-03946—Rev. B, 09-Jul-01
DWG: 5550

Downloaded from Arrow.com.

Recommended Minimum PADs for µDFN 6L

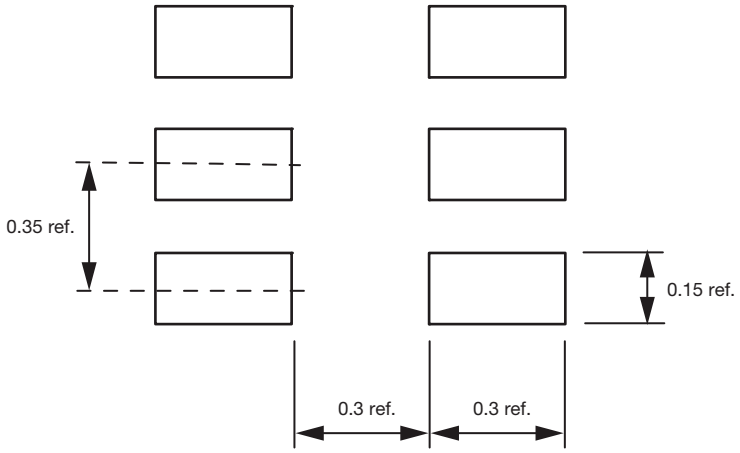

Mounting Footprint
Dimensions in mm

For technical questions, contact: analogswitchtechsupport@vishay.com

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Downloaded from Arrow.com.

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

© 2026 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Downloaded from Arrow.com.