


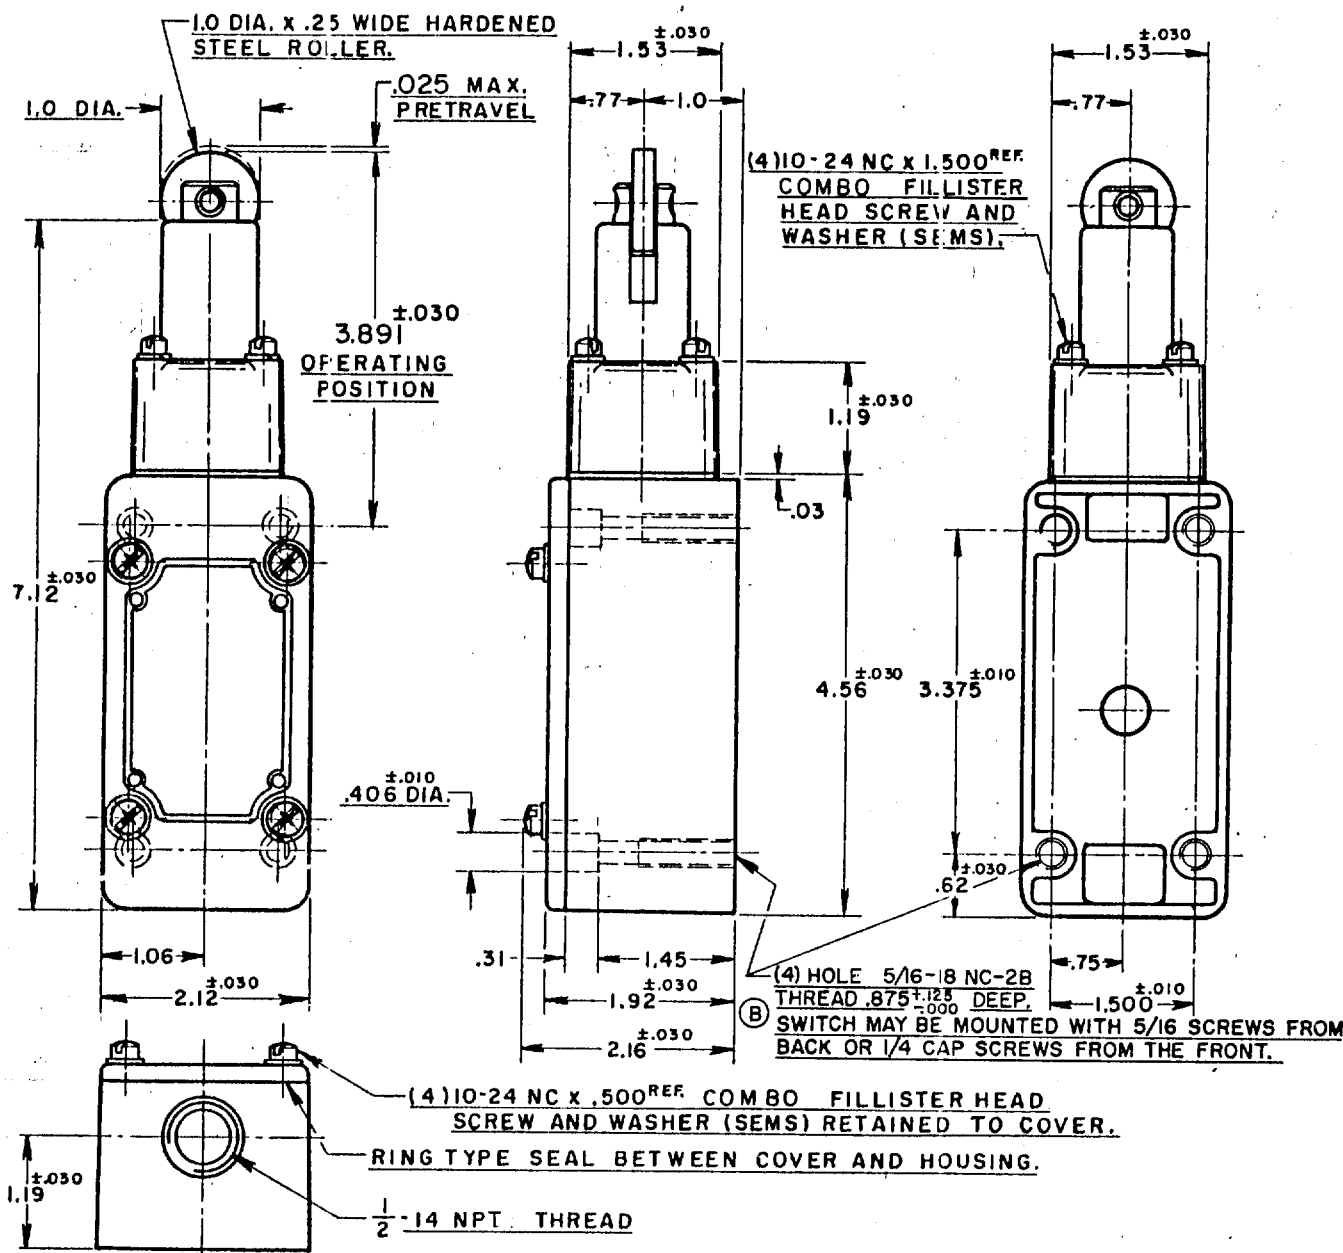

NOTE -

- 1-ROLLER ASSEMBLY MAY BE RE-ASSEMBLED 90° FROM POSITION SHOWN.
- 2-IT IS ESSENTIAL TO PREVENT ENTRANCE OF HARMFUL AGENTS THRU THRU THE CONDUIT OPENING TO OBTAIN THE FULL BENEFIT OF THE SEALED CONSTRUCTION PROVIDED IN THIS UNIT
- 3-SWITCH WILL PERFORM SATISFACTORILY IN TEMPERATURES TO MINUS 30° F.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS (TENTATIVE)

OPERATING FORCE — — — 6 LBS. APPROX.

RELEASE FORCE — — — 4 LBS. APPROX.

DIFFERENTIAL TRAVEL — — — .005 MAX.

OVERTRAVEL — — — .500 MIN.

SWITCH-BASIC REPLACEMENT — — — IMK1

ELECTRICAL DATA

CONTACT ARRANGEMENT
S. P. D. T.BREAK CAPACITY
20 A-120, 240, 480 OR 600 VAC; 3/4 HP-120VAC,
1 1/2 H.P.-240 VAC; 1/2 A-115 VDC; 1/4 A-230 VDC
PILOT DUTY RATING: 600 VAC MAX.

SCALE 1/2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT

©

SP

UL