




Part Number : [2202260004](#)
Product Description : Micro-Fit+ PCIe CEM5 Power
Crimp Terminal, Female, Tin (Sn) Plating, 16 AWG
Series Number : 220226
Status : Active
Product Category : Crimp Terminals

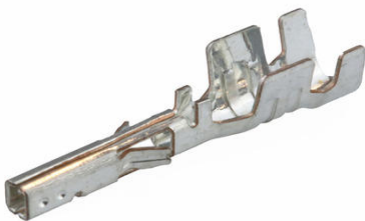

Documents and Resources

Drawings

- [2202260004 sd.pdf](#)
- [2202260001-PK-000.pdf](#)
- [STEP AP242](#)
- [SOLIDWORKS](#)
- [Creo](#)

Specifications

- [2191160001-AS-000.pdf](#)
- [2191160001-PS-000.pdf](#)
- [2191160001-TS-000.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Compliant with Exemption 44; 47; 34
China RoHS	 per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2025)7771-DC (04 Feb 2026)
EU RoHS	Compliant per EU 2015/863

Compliance Statements

- EU RoHS

- REACH SVHC
- Low-Halogen

Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Substances of Interest

- PFAS

EU RoHS Certificate of Compliance

Additional Product Compliance Information

Part Details

General

Status	Active
Category	Crimp Terminals
Series	220226
Description	Micro-Fit+ PCIe CEM5 Power Crimp Terminal, Female, Tin (Sn) Plating, 16 AWG
Application	Power, Wire-to-Board
Product Name	Micro-Fit+ PCIe
UPC	196823273148

Electrical

Current - Maximum per Contact	9.2A
Voltage - Maximum	600V AC (RMS)/DC

Physical

Durability (mating cycles max)	30
Gender	Female
Material - Metal	High Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	0.201/g
Packaging Type	Reel

Plating min - Mating	1.000µm
Plating min - Termination	1.000µm
Termination Interface Style	Crimp or Compression
Wire Insulation Diameter	1.90-2.30mm
Wire Size (AWG)	16
Wire Size mm ²	N/A

Mates With / Use With

Use with Part(s)

Description	Part Number
Micro-Fit+ PCIe CEM5 Dual Row Receptacle Housings	<u>219114</u>

Application Tooling

Global

Description	Part Number
FA2 Mechanical Feed Crimp Applicator for Micro-Fit+ PCIe Gen5 12V High Power Female Terminal, 16 AWG, UL 1061 Wire	<u>2130695700</u>
FA2 Pneumatic Feed Crimp Applicator for Micro-Fit+ PCIe Gen5 12V High Power Female Terminal, 16 AWG, UL 1061 Wire	<u>2130695710</u>
Extraction Tool for Mini-Fit Jr. Terminals	<u>11030044</u>
Hand Crimp Tool for Micro-Fit+ PCIe Gen5 Power Terminal (16 AWG, UL 1061), Micro-Fit+ PCIe Gen5 Signal Terminal (28 AWG, UL 1061), and Micro-Fit+ OCP M-PIC Power Terminal (16 AWG, UL 1061)	<u>2133097800</u>