
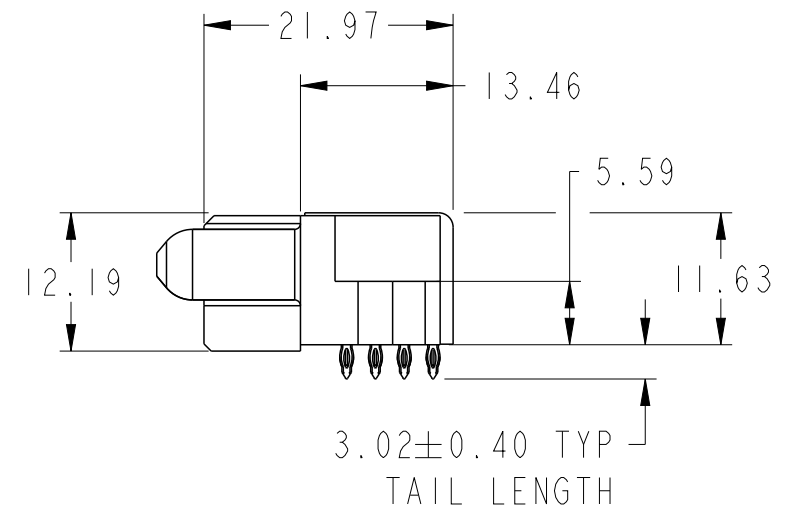
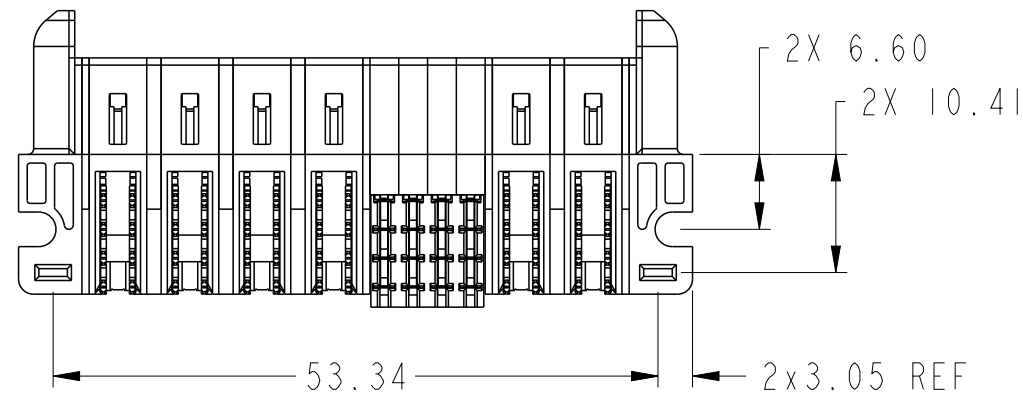
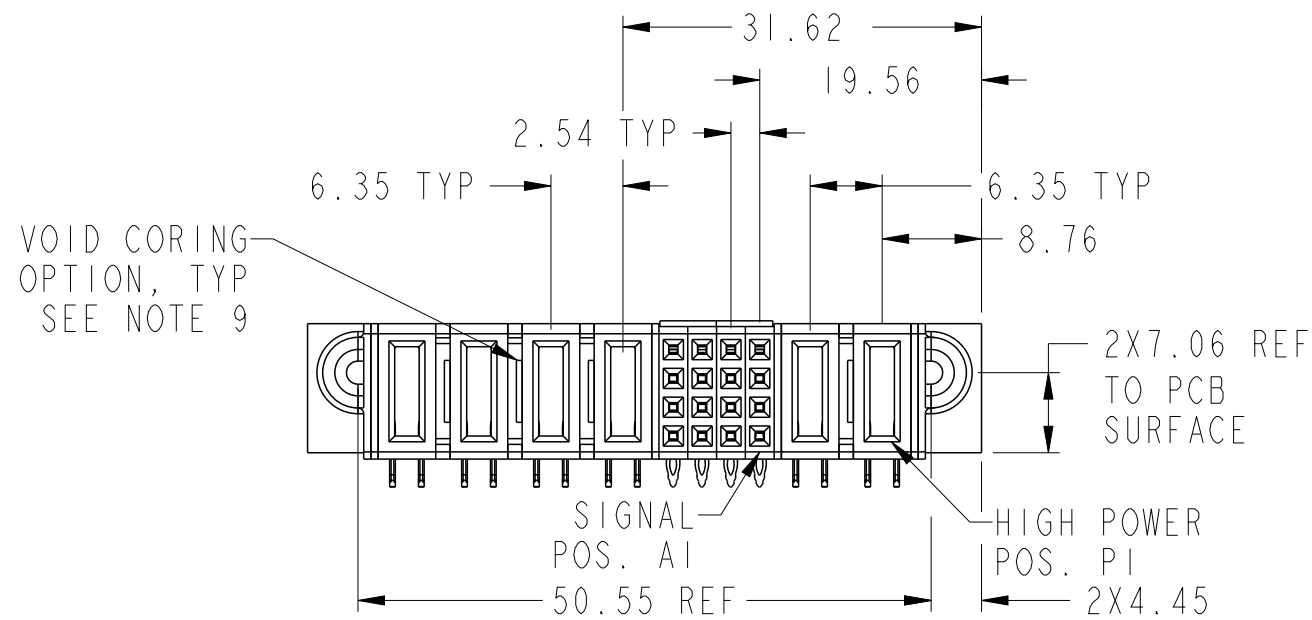


PRODUCT NUMBER SEE SHEET 2

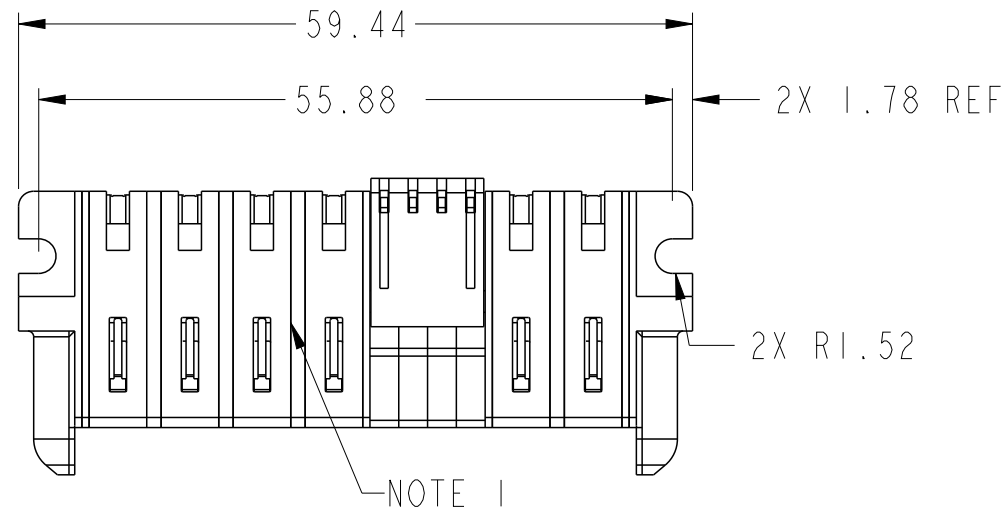

spec ref				dr		Bob Xie	2014/03/31		projection				size		A3	scale		3:2																			
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Vicking Liu	2016/10/31						ecn no					ELX-DG-25195-1																	
ISO 406						chr		Fancy Zhang	2016/11/02						rel level					Released																	
ISO 1101						appr		Pei-Ming Zheng	2016/11/02																product family					PwrBlade+							
surface						linear		0.X		±0.5							title					2HP + 16S + 4HP					dwg no					10106127-6004001					rev
		0.XX		±0.25																																	
												0.XXX		±0.10																							
		ISO 1302		angular		0°		±2°		cat. no.																											

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL MODULES AND
END MODULES ARE OPTIONAL AND THE SHAPE MAY BE DIFFERENT FOR
OPTIMIZE THE MOLDING PROCESS. THE VOID CORING WILL NOT EFFECT
TO PRODUCT FUNCTION.
- 10) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

spec ref				dr		Bob Xie	2014/03/31		projection		MM		size		A3	scale		3:2							
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Vicking Liu	2016/10/31						ecn no		ELX-DG-25195-1								
ISO 406						chr		Fancy Zhang	2016/11/02						rel level		Released								
ISO 1101						appr		Pei-Ming Zheng	2016/11/02						product family		PwrBlade+								
surface		linear		0.X		±0.5		Amphenol FCI		title		2HP + 16S + 4HP		dwg no		10106127-6004001		rev		B					
																						0.XX		±0.25	
																						0.XXX		±0.10	
ISO 1302		angular		0°		±2°				cat. no.		Product - Customer Drw		sheet 3 of 3											