

Disc Type Capacitors with Lead (High Voltage Ceramic Capacitors)

Product Top Page

Search by Part No.

Search by Characteristics

Cross Reference

Catalog

Tech Note

CD11ZU2GA332MYNKA



Applications



Commercial Grade

Feature

Mid

Mid Voltage (100 to 630V)

Safety

Safety Standard Approved

Halogen-free

Halogen-free

Series


CD

Status



Production (Not Recommended for New Design)

Recommended Alternate Part No. : [CD45-E2GA332M-NKA](#)



Images are for reference only
and show exemplary products.

PDF file of this page



Contact



Documents

Catalog

Specification

Characterization Sheet

Size

Diameter(D)	12.00mm Max.
Thickness(T)	7.00mm Max.
Lead Gap(F)	10.00mm +2.00,-1.00mm
Lead Diameter(d)	0.60mm ±0.05mm

Electrical Characteristics


Capacitance	3.3nF ±20%
Rated Voltage	400VAC
Withstanding Voltage	4kVAC
Temperature Characteristic	Z5U(+22,-56%)
Dissipation Factor (Max.)	2.5%
Insulation Resistance (Min.)	10000MΩ

Other


Soldering Method	Wave (Flow) Iron Soldering
Lead Length / Package Type	5mm for Bulk
AEC-Q200	No
Package Quantity	1000pcs

Characteristic Graph (This is reference data, and does not guarantee the products characteristics.)

Impedance

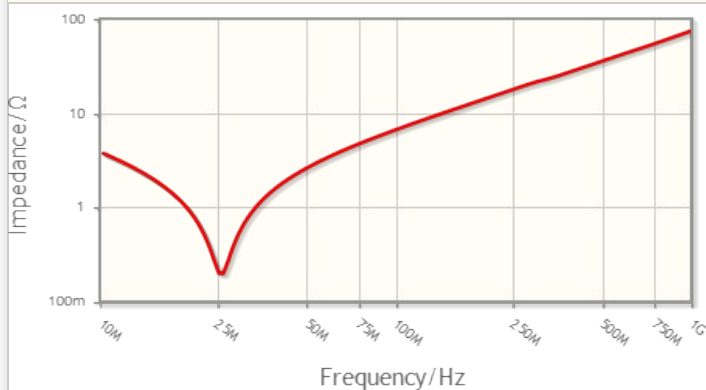


Temperature Characteristic

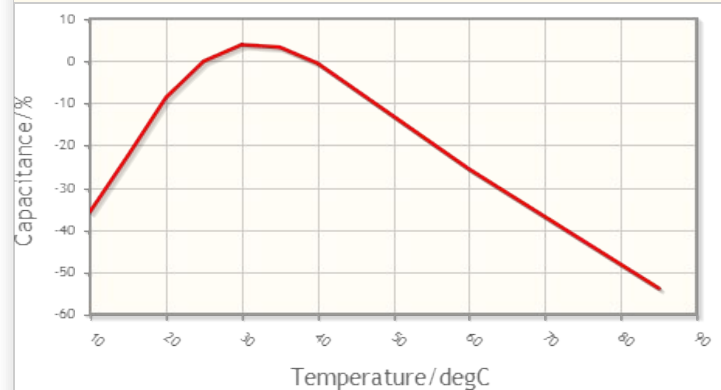

Change settings

Change settings

Leak Current

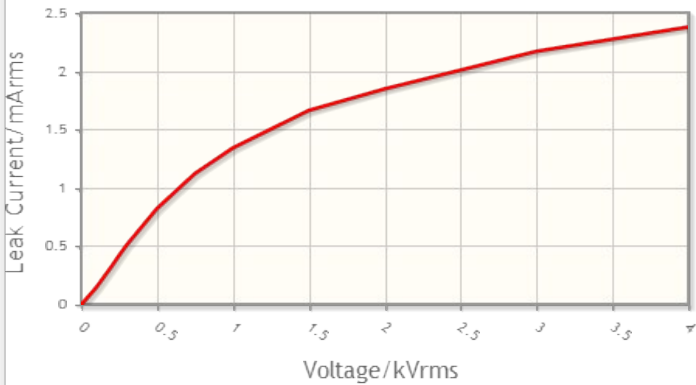

CD11ZU2GA332MYNKA

Change settings

Max. Allowable Voltage

no data available

Change settings

Products

- » Search by Part No. » Search by Characteristics » Distributor Inventory Check
- » Capacitors

» Inductors (Coils)

» EMC Components

» RF Components and Modules

» Voltage / Current / Temperature Protection Devices

» Sensors and Sensor Systems

» Ceramic Switching / Heating, Piezo Components, Buzzers and Microphones

» Transformers

» Ferrites and Accessories

» Noise Suppressing / Magnetic Sheet
- » Anechoic Chambers and Radio Wave Absorbers

» Power Supplies

» Magnets

» Flash Storages

» Wireless Power Transfer

» FA Systems

» Transparent Conductive Film

» Micro Modules (Substrates with Built-in ICs, Products Utilizing with SESUB)

» Solar Cells

» Biosensor

- Application Guides
- Technical Support
- Tech Library
- Environment
- Contact
- News
- Home

- About TDK
- TDK Worldwide

Terms of Use Privacy Policy

Copyright(c) 1996-2017 TDK Corporation. All rights reserved.
TDK logo is a trademark or registered trademark of TDK Corporation.

