


Series
MPX

SIZE 16 REAR RELEASE, REAR REMOVABLE CRIMP SOCKET CONTACT

Issue:
Dec. 15, 2015

Page
1/1

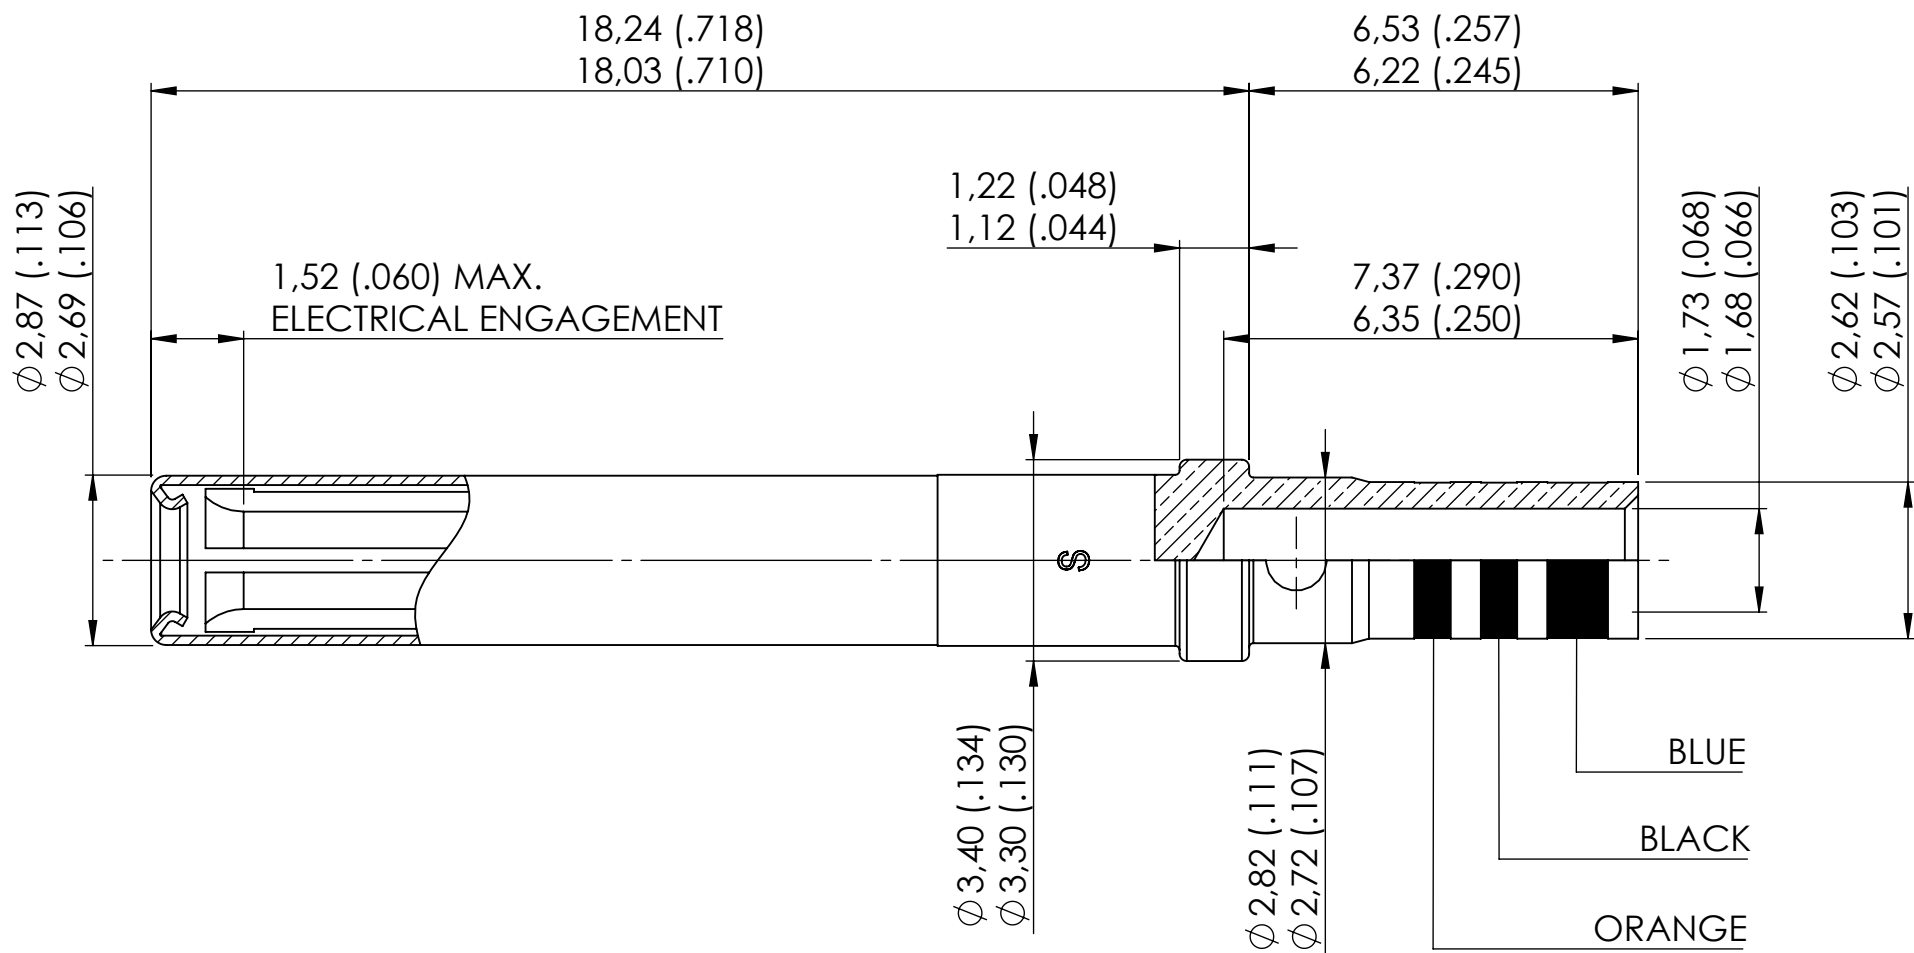


MATERIAL AND FINISH :
CONTACT BODY : BERYLIUM COPPER - GOLD OVER NICKEL UNDERPLATE
PROTECTIVE SLEEVE : PASSIVATED STAINLESS STEEL

WIRES ACCOMODATED : AWG 16, 18 AND 20
INSULATION DIAMETER : Ø2,62 (.103) MAX ; Ø 1,73 (.068) MIN
STRIP LENGTH : 6,00 (.236)

TOOLING :
CRIMPING TOOL : M22520/1-01
SELECTOR POSITION : 6 FOR AWG 16
5 FOR AWG 18
4 FOR AWG 20
POSITIONER : M22520/1-02

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 0.77 g

CREATION

PEN: /

NOM: FALETTI

DATE: Jan. 20, 1988

APPR.: /

Dec. 14, 15

Redrawn

COSSON L.

BRANJONNEAU V.

Issue

Revisions

Name

Approved

618330EN

RADIALL PROPRIETARY INFORMATION

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311