


Hand formable (RG405) 50Ohm, 40GHz, 165°C, ø2.1mm, no jacket

SUCOFORM_86

Properties

- Hand-formable alternative to semi-rigid cables
- Small bend radius allows for space saving routing and packaging
- Performance comparable to semi-rigid cables

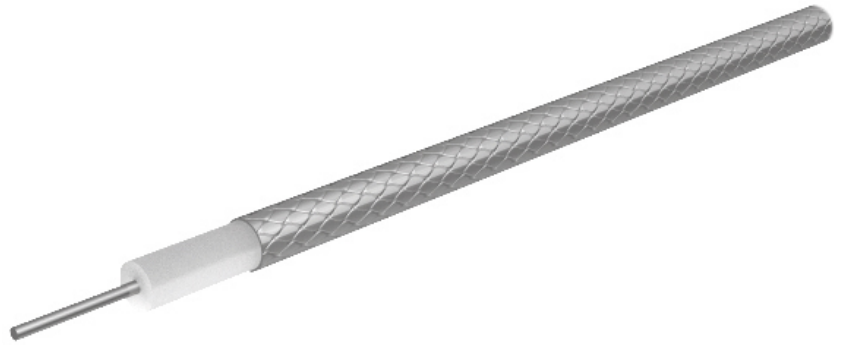

Construction			
Component	Material	Detail	Diameter
Centre conductor	Steel, Copper + Silver plated	Wire	0.53 mm
Dielectric	PTFE (Polytetrafluoroethylene)		1.65 mm
Outer conductor	Copper, Tin plated	Tin soaked braid, 100%	2.1 mm

Electrical data	
Impedance	50 Ω +/-2Ω
Operating frequency	≤ 40 GHz
Capacitance	95 pF/m
Velocity of signal propagation	71 %
Signal delay	4.7 ns/m
Screening effectiveness	100 dB at frequency 0.1 GHz ... 18GHz
Insulation resistance	100000000 MΩ*m
Inner conductor resistance	199 Ω/km
Outer conductor resistance	39 Ω/km
Operating Voltage (at sea level)	≤ 1.5 kVrms
Test voltage (50 Hz/1 min)	≤ 3 kVrms

Mechanical data	
Weight	approx. 15 g/m
Static bending radius	≥ 6 mm
Repeated bending radius	20 mm (bendings, up to 50)

Environmental data	
Operation temperature	-65 °C ... 165 °C
Installation temperature	-20 °C ... 60 °C
Flame propagation standard	IEC 60332-1 UL 1581 § 1080 (VW-1)

Hand formable (RG405) 50Ohm, 40GHz, 165°C, ø2.1mm, no jacket

SUCOFORM_86

Environmental data			
Fire characteristics		contains halogene	
Material compliance			
Item number	Directive / Regulation	Rating	Exemptions / Details
22511613	RoHS 2011/65/EU and (EU) 2015/863	Compliant without exemption	
	REACH 1907/2006 Article 33 SVHC	Free of SVHC >0,1%	
Suitable connectors			
Cable group		Y16	
Ordering information			
Item number	Item description	Available as assembly only	
22511613	SUCOFORM_86	No	
Power Matrix			
Calculation: typical Attenuation [formula: (a*f^0.5 + b*f)] and maximum Power CW [formula: (p/f^0.5)]			
a coefficient typical =	0.6283	b coefficient typical =	0.04
fmax =	40	P at 1 GHz =	162
Frequency GHz	Nom. attenuation (dB/m)	Nom. attenuation (dB/ft)	CW power (W)
	sea level 25°C ambient temperature	sea level 25°C ambient temperature	sea level 40°C ambient temperature
0.20	0.289	0.088	362
0.40	0.413	0.126	256
0.60	0.511	0.156	209
0.80	0.594	0.181	181
1.00	0.668	0.204	162
1.20	0.736	0.224	148
1.40	0.799	0.244	137
1.60	0.859	0.262	128
1.80	0.915	0.279	121
2.00	0.969	0.295	115
4.00	1.417	0.432	81
6.00	1.779	0.542	66
8.00	2.097	0.639	57
10.00	2.387	0.728	51
15.00	3.033	0.925	42
20.00	3.610	1.100	36
25.00	4.141	1.262	32
30.00	4.641	1.415	30
35.00	5.117	1.560	27
40.00	5.574	1.699	26

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/ EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P675 / Date of publication: 12.03.2026 / uncontrolled copy