
DASH NUMBER	CABLES ACCOMMODATED	A MAX	ASSEMBLE PER
-201	MI7/176-00002	1.80	TAI-166
-202	TWC-78-1		
-203	TWC-124-1A		
-204	10602, RAYCHEM		
-205	TWAC-78-1F2		
-206	7826D0130, RAYCHEM		
-207	83310 BELDEN		
-208	202-3927, MICRODOT		
-209	202-3942, MICRODOT		
-210	8451 BELDEN		
-211	202-3934 MICRODOT	1.55	TAI-138
-212	2524E0114, RAYCHEM		
-213	TWC-78-2		
-214	TWC-124-2		
-215	BL-982 TIMES		
-216	BL-1242 TIMES		
-217	GC875TM24H, GRUMMAN	1.80	TAI-166
-218	EPD221888, RAYCHEM		
-219	2526D1114, RAYCHEM		
-220	GC875RR1, GRUMMAN		
-221	10614, RAYCHEM		
-222	10613, RAYCHEM		
-223	HMS2-1149, HUGHES		
-224	TWCP-124-3	1.55	TAI-138
-225	PS665PL, PRIME STOCK		

DASH NUMBER	CABLES ACCOMMODATED	A MAX	ASSEMBLE PER
-301	GC875GC1, GRUMMAN	1.80	TAI-168
-302	GC875GB1, GRUMMAN 5022E5111, RAYCHEM		
-303	7528A5314, RAYCHEM		
-304			
-305	MI7/177-00001 295-3804 MICRODOT		
-306	TRC-50-2 MI7/134-00002		TAI-218
-307	TRC-75-1		TAI-168
-308	TRC-75-2		TAI-218
-309	TRC-50-1		TAI-168


DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.


REVISIONS

REV	DESCRIPTIONS	DATE	APPROVED
R	REVISED PER ECO 16929	6/4/09	[illegible]




SCALE 1/1

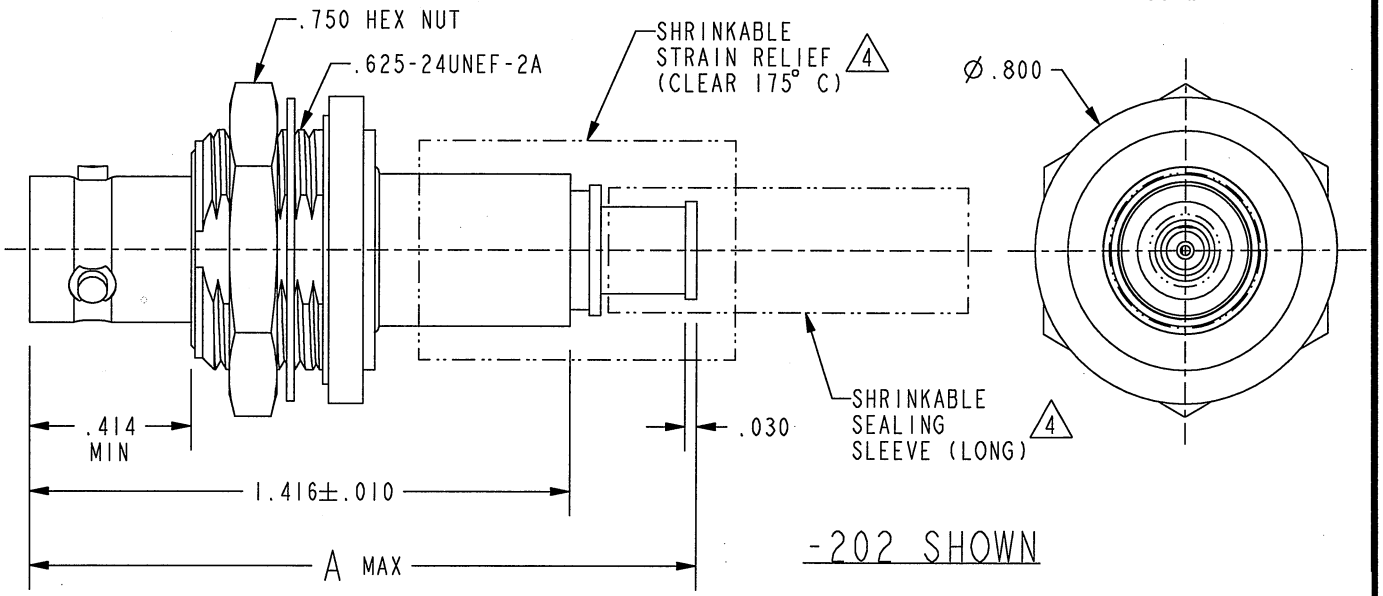



RECOMMENDED PANEL CUTOUT



RECOMMENDED HEX CRIMP

5. EXAMPLE OF COMPLETE MODEL NUMBER:

BJ74C-201
BASIC MODEL NUMBER — CABLE GROUP DASH NUMBER

4 1 SHRINKABLE STRAIN RELIEF AND/OR SHRINKABLE SEALING SLEEVE SUPPLIED LOOSE AS FOLLOWS:

a. CABLE GROUPS -201 THROUGH -210, -217 THROUGH -303, -305, -307 AND -309

1 SHRINKABLE STRAIN RELIEF (1.00 LONG)
1 SHRINKABLE SEALING SLEEVE (1.25 LONG)

b. CABLE GROUPS -211 THROUGH -216, -224, -225, -306 AND -308

1 SHRINKABLE STRAIN RELIEF (1.75 LONG)

3. MAXIMUM PANEL THICKNESS: .140

2. CONCENTRIC TWINAX/TRIAX TRB, INSULATED FULL CRIMP BULKHEAD MOUNT CABLE RECEPTACLE

1. FINISH: NICKEL

NOTES: UNLESS OTHERWISE SPECIFIED.

INTERPRET DRAWING PER MIL-STD-100. DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED.

TOL: UNLESS SPECIFIED.
.XX ± .02
.XXX ± .010
ANGLE ± 1°

TROMPETER ® ELECTRONICS, INC.

DRN	L.M.	5-26-09
CHK	M.J.	5-29-09
QUALITY		
MANUF		
APPROVED	[illegible]	5/29/09
PROE FILE NO.	3-0201	

MATERIAL:

FINISH:

DO NOT SCALE DWG

NEXT ASSY

TITLE: BJ74C

SIZE	CAGE CODE	DRAWING NO.	REV.
A	14949	3-0201	R

DATE 11-11-86 SHEET 1

Downloaded from Arrow.com.
Please read our datasheet & drawing disclaimer here.