THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	OFFICIAL VERSION RELEASE	25DEC2016	F.Y	X.X

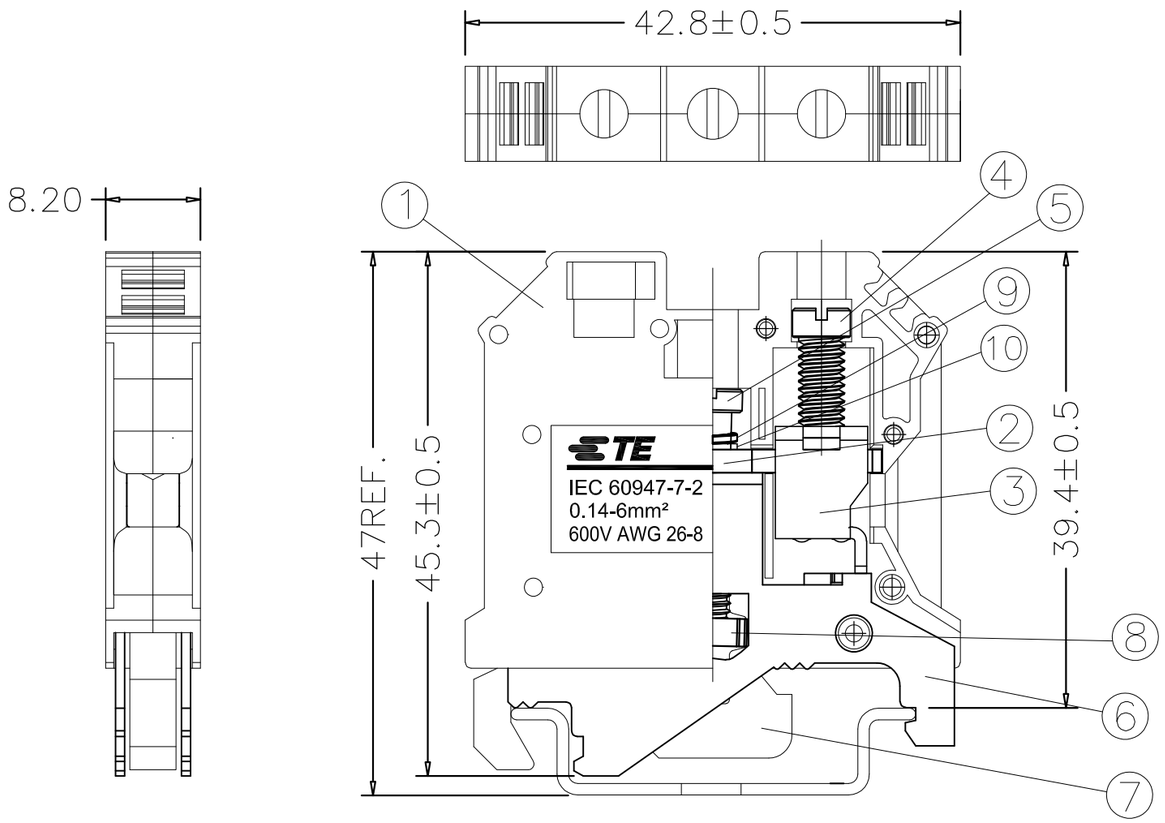

10	FLAT WASHER	STEEL	1	ZINC Plated
9	ELASTIC WASHER	STEEL	1	ZINC Plated
8	NUT	STEEL	1	ZINC Plated
7	LOCK TERMINAL	STEEL	1	ZINC Plated
6	GROUND TERINAL	COPPER ALLOY	1	Tin Plated
5	MOUNTING SCREW	STEEL	1	ZINC Plated
4	TERMINAL SCREW	STEEL	2	ZINC Plated
3	CAGE CLAMP	STEEL	2	ZINC Plated
2	TERMINAL	COPPER ALLOY	1	Tin Plated
1	HOUSING	THERMOPLASTIC	2	
ITEM	COMPONENTS	MATERIAL	Q'TY	PLATING

NOTES:
1. Material:See table
2. Rated current & voltage :600V(UL)
3. Impulse withstand voltage: 8KV
4. Terminal Screw Size & torque:M3.5, 10-14lbs-in(1.15-1.6Nm)
5. Mounting screw size & torque:M4, 9-12lbs-in(1.03-1.38Nm)
6. Wire strip length: 10-12mm
7. Suitable wire size : (UL)26 - 8 AWG , (IEC)0.14-6mm²
8. Requirement for environmental substance must be compliance with ROHS and REACH.

DTC 6-G	2271689-1	GREEN-YELLOW
TE SERIES No.	PART NUMBER	COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± 0.50
1 PLC ± 0.40
2 PLC ± 0.30
3 PLC ± –
4 PLC ± –
ANGLES ± 3°

MATERIAL –
FINISH –

DWN FENCER YU 25DEC2016
CHK KOBBY ZHAO 25DEC2016
APVD XIANG XU 25DEC2016
PRODUCT SPEC 108-137173
APPLICATION SPEC 114-137172
WEIGHT 27 g

TE Connectivity

NAME
6mm^2 WIRE 1 IN 1 OUT SCREW
TYPE TERMINAL BLOCK WITH GROUND FUNCTION
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2271689	—

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV A

Downloaded from Arrow.com.