

# International **IR** Rectifier

PD - 93983A

**REPETITIVE AVALANCHE AND dv/dt RATED  
HEXFET® TRANSISTORS  
SURFACE MOUNT (LCC-18)**

**IRFE120  
JANTX2N6788U  
REF: MIL-PRF-19500/555  
100V, N-CHANNEL**

## Product Summary

Part Number	BVDSS	RDS(on)	ID
IRFE120	100V	0.30Ω	4.5A



The leadless chip carrier (LCC) package represents the logical next step in the continual evolution of surface mount technology. Desinged to be a close replacement for the TO-39 package, the LCC will give designers the extra flexibility they need to increase circuit board density. International Rectifier has engineered the LCC package to meet the specific needs of the power market by increasing the size of the bottom source pad, thereby enhancing the thermal and electrical performance. The lid of the package is grounded to the source to reduce RF interference.

## Features:

- Surface Mount
- Small Footprint
- Alternative to TO-39 Package
- Hermetically Sealed
- Dynamic dv/dt Rating
- Avalanche Energy Rating
- Simple Drive Requirements
- Light Weight

## Absolute Maximum Ratings

	Parameter		Units
ID @ VGS = 10V, TC = 25°C	Continuous Drain Current	4.5	A
ID @ VGS = 10V, TC = 100°C	Continuous Drain Current	2.8	
IDM	Pulsed Drain Current ①	18	
PD @ TC = 25°C	Max. Power Dissipation	14	W
	Linear Derating Factor	0.11	W/°C
VGS	Gate-to-Source Voltage	±20	V
EAS	Single Pulse Avalanche Energy ②	0.242	mJ
IAR	Avalanche Current ①	2.2	A
EAR	Repetitive Avalanche Energy ①	1.4	mJ
dv/dt	Peak Diode Recovery dv/dt ③	5.5	V/ns
TJ	Operating Junction	-55 to 150	°C
TSTG	Storage Temperature Range		
	Pckg. Mounting Surface Temp.	300 (for 5s)	
	Weight	0.42(typical)	g

For footnotes refer to the last page

[www.irf.com](http://www.irf.com)

1

08/03/07

**Electrical Characteristics @  $T_j = 25^\circ\text{C}$  (Unless Otherwise Specified)**

	Parameter	Min	Typ	Max	Units	Test Conditions
$\text{BV}_{\text{DSS}}$	Drain-to-Source Breakdown Voltage	100	—	—	V	$\text{V}_{\text{GS}} = 0\text{V}$ , $\text{I}_D = 1.0\text{mA}$
$\Delta \text{BV}_{\text{DSS}}/\Delta T_j$	Temperature Coefficient of Breakdown Voltage	—	0.10	—	$\text{V}^\circ\text{C}$	Reference to $25^\circ\text{C}$ , $\text{I}_D = 1.0\text{mA}$
$\text{R}_{\text{DS(on)}}$	Static Drain-to-Source On-State Resistance	—	—	0.30	$\Omega$	$\text{V}_{\text{GS}} = 10\text{V}$ , $\text{I}_D = 2.8\text{A}$ ④
		—	—	0.35		$\text{V}_{\text{GS}} = 10\text{V}$ , $\text{I}_D = 4.5\text{A}$ ④
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	2.0	—	4.0	V	$\text{V}_{\text{DS}} = \text{V}_{\text{GS}}$ , $\text{I}_D = 250\mu\text{A}$
$\text{g}_{\text{fs}}$	Forward Transconductance	1.5	—	—	S	$\text{V}_{\text{DS}} > 15\text{V}$ , $\text{I}_{\text{DS}} = 2.8\text{A}$ ④
$\text{I}_{\text{DSS}}$	Zero Gate Voltage Drain Current	—	—	25	$\mu\text{A}$	$\text{V}_{\text{DS}} = 80\text{V}$ , $\text{V}_{\text{GS}} = 0\text{V}$
		—	—	250		$\text{V}_{\text{DS}} = 80\text{V}$ $\text{V}_{\text{GS}} = 0\text{V}$ , $T_j = 125^\circ\text{C}$
$\text{I}_{\text{GSS}}$	Gate-to-Source Leakage Forward	—	—	100	$\text{nA}$	$\text{V}_{\text{GS}} = 20\text{V}$
$\text{I}_{\text{GSS}}$	Gate-to-Source Leakage Reverse	—	—	-100		$\text{V}_{\text{GS}} = -20\text{V}$
$\text{Q}_g$	Total Gate Charge	—	—	18	$\text{nC}$	$\text{V}_{\text{GS}} = 10\text{V}$ , $\text{I}_D = 4.5\text{A}$
$\text{Q}_{\text{gs}}$	Gate-to-Source Charge	—	—	4.0		$\text{V}_{\text{DS}} = 50\text{V}$
$\text{Q}_{\text{gd}}$	Gate-to-Drain ('Miller') Charge	—	—	9.0		
$t_{\text{d(on)}}$	Turn-On Delay Time	—	—	40	$\text{ns}$	$\text{V}_{\text{DD}} = 35\text{V}$ , $\text{I}_D = 4.5\text{A}$
$t_r$	Rise Time	—	—	70		$\text{V}_{\text{GS}} = 10\text{V}$ , $\text{R}_G = 7.5\Omega$
$t_{\text{d(off)}}$	Turn-Off Delay Time	—	—	40		
$t_f$	Fall Time	—	—	70		
$\text{L}_{\text{S}} + \text{L}_{\text{D}}$	Total Inductance	—	6.1	—	$\text{nH}$	Measured from the center of drain pad to center of source pad
$\text{C}_{\text{iss}}$	Input Capacitance	—	350	—	$\text{pF}$	$\text{V}_{\text{GS}} = 0\text{V}$ , $\text{V}_{\text{DS}} = 25\text{V}$ $f = 1.0\text{MHz}$
$\text{C}_{\text{oss}}$	Output Capacitance	—	150	—		
$\text{C}_{\text{rss}}$	Reverse Transfer Capacitance	—	24	—		

**Source-Drain Diode Ratings and Characteristics**


	Parameter	Min	Typ	Max	Units	Test Conditions
$\text{I}_{\text{S}}$	Continuous Source Current (Body Diode)	—	—	4.5	$\text{A}$	
$\text{I}_{\text{SM}}$	Pulse Source Current (Body Diode) ④	—	—	18		
$\text{V}_{\text{SD}}$	Diode Forward Voltage	—	—	1.8	V	$T_j = 25^\circ\text{C}$ , $\text{I}_{\text{S}} = 4.5\text{A}$ , $\text{V}_{\text{GS}} = 0\text{V}$ ④
$t_{\text{rr}}$	Reverse Recovery Time	—	—	240	$\text{ns}$	$T_j = 25^\circ\text{C}$ , $\text{I}_{\text{F}} = 4.5\text{A}$ , $\text{dI}/\text{dt} \leq 100\text{A}/\mu\text{s}$ $\text{V}_{\text{DD}} \leq 50\text{V}$ ④
$\text{Q}_{\text{RR}}$	Reverse Recovery Charge	—	—	2.0	$\mu\text{C}$	
$t_{\text{on}}$	Forward Turn-On Time	Intrinsic turn-on time is negligible. Turn-on speed is substantially controlled by $\text{L}_{\text{S}} + \text{L}_{\text{D}}$ .				

**Thermal Resistance**


	Parameter	Min	Typ	Max	Units	Test Conditions
$\text{R}_{\text{thJC}}$	Junction to Case	—	—	8.93	$^\circ\text{C}/\text{W}$	
$\text{R}_{\text{thJ-PCB}}$	Junction to PC Board	—	—	26		Soldered to a copper clad PC board

**Note: Corresponding Spice and Saber models are available on International Rectifier Website.**


For footnotes refer to the last page

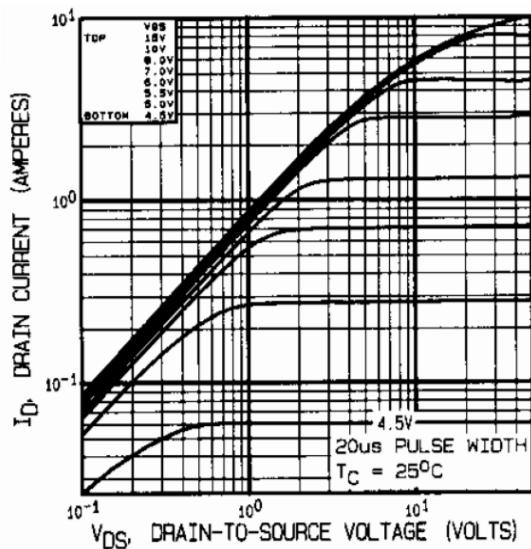


**Fig 1.** Typical Output Characteristics

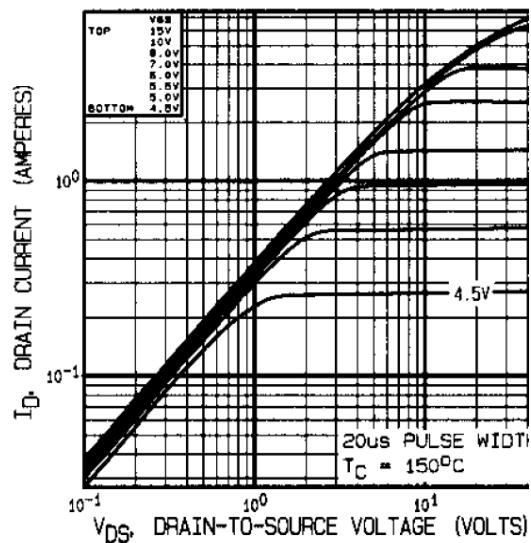

**Fig 2.** Typical Output Characteristics

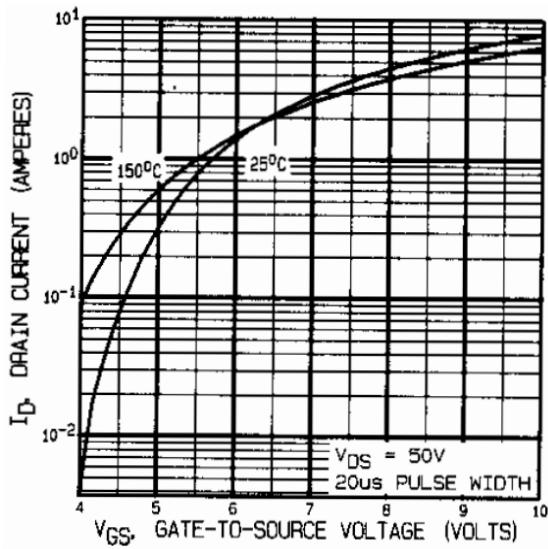

**Fig 3.** Typical Transfer Characteristics

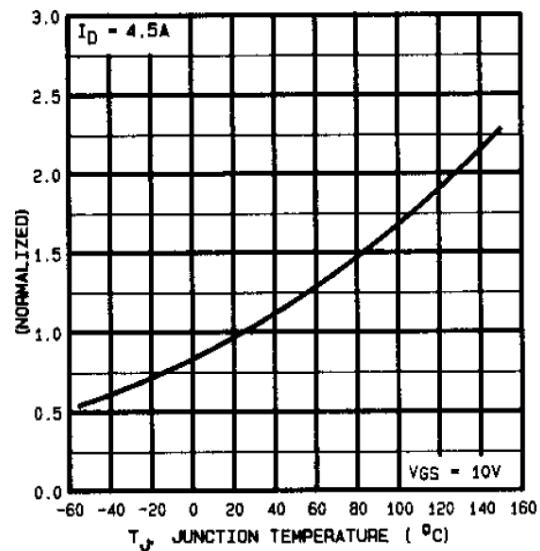

**Fig 4.** Normalized On-Resistance  
 Vs. Temperature

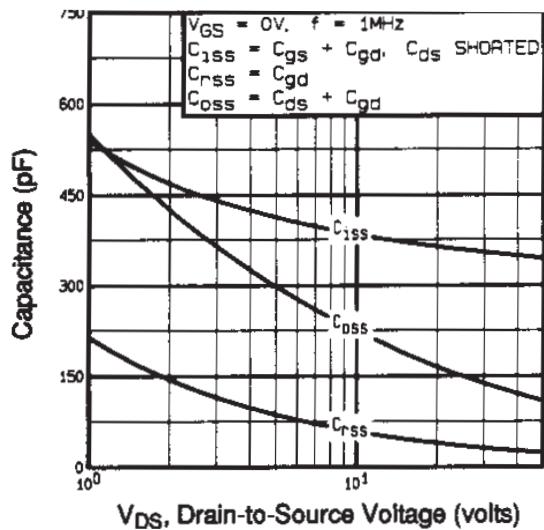


Fig 5. Typical Capacitance Vs.  
Drain-to-Source Voltage

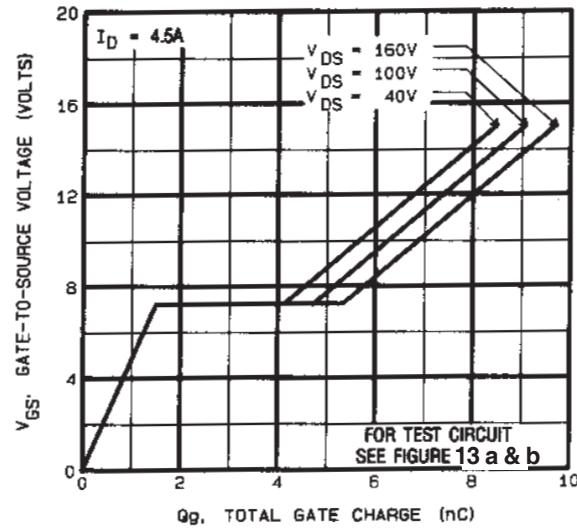


Fig 6. Typical Gate Charge Vs.  
Gate-to-Source Voltage

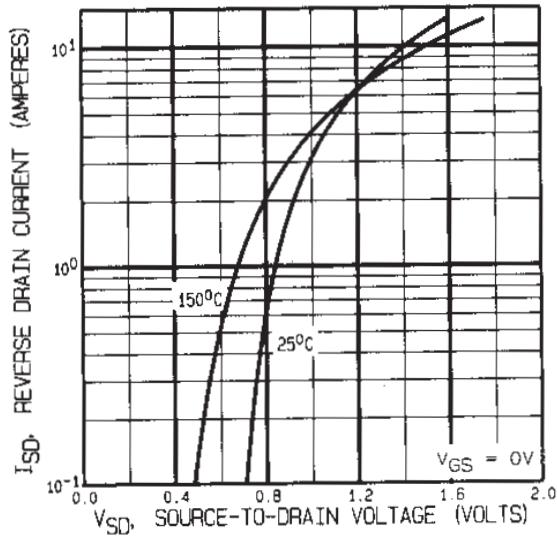


Fig 7. Typical Source-Drain Diode  
Forward Voltage



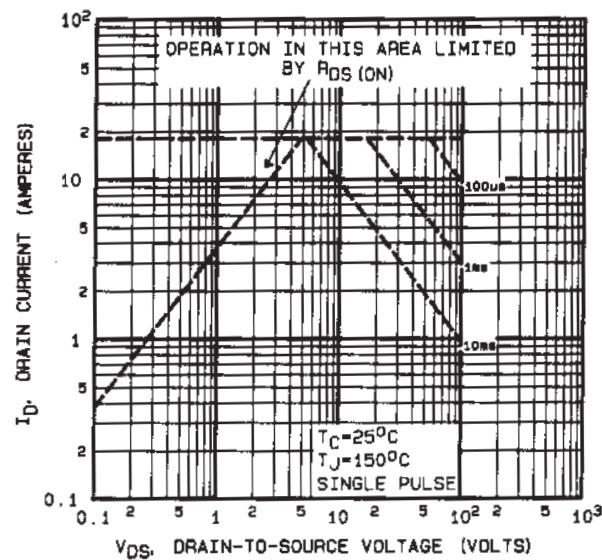



Fig 8. Maximum Safe Operating Area

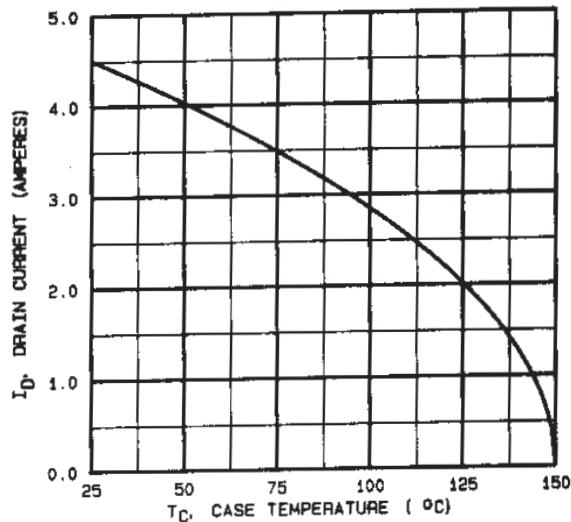


**Fig 9.** Maximum Drain Current Vs.  
Case Temperature

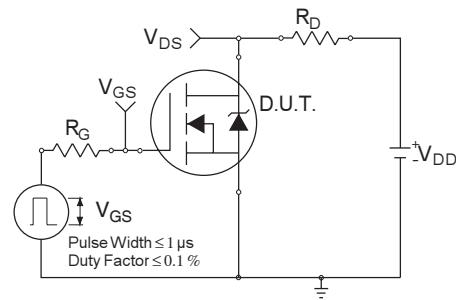

**Fig 10a.** Switching Time Test Circuit

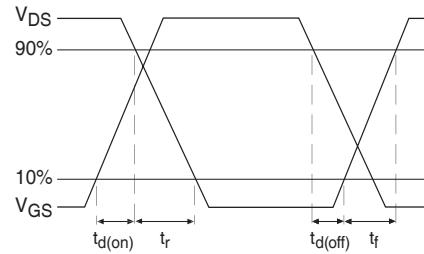

**Fig 10b.** Switching Time Waveforms

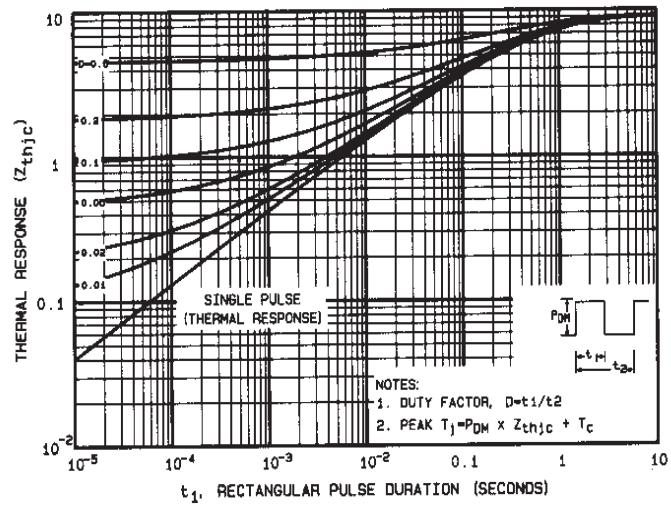

**Fig 11.** Maximum Effective Transient Thermal Impedance, Junction-to-Case

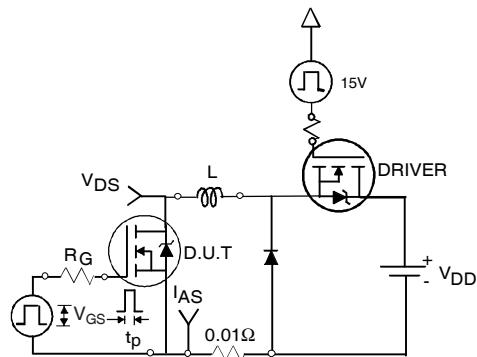


Fig 12a. Unclamped Inductive Test Circuit

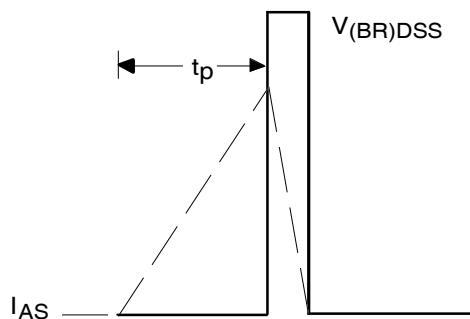


Fig 12b. Unclamped Inductive Waveforms

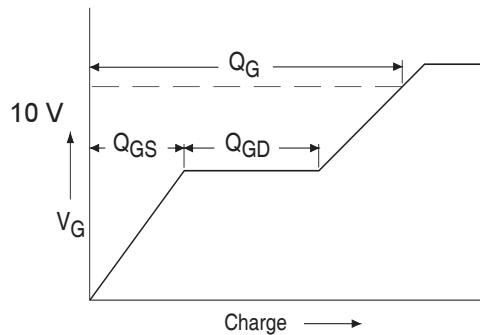


Fig 13a. Basic Gate Charge Waveform

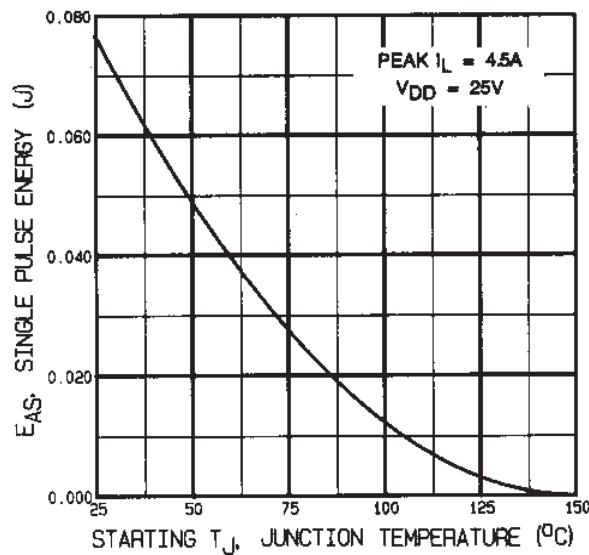


Fig 12c. Maximum Avalanche Energy Vs. Drain Current

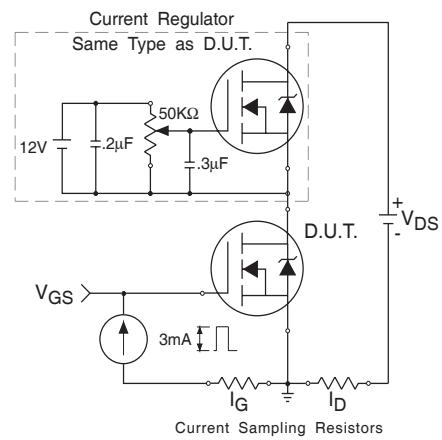


Fig 13b. Gate Charge Test Circuit

**Foot Notes:**


① Repetitive Rating; Pulse width limited by maximum junction temperature.

②  $V_{DD} = 25V$ , starting  $T_J = 25^{\circ}C$ ,  
Peak  $I_L = 2.2A$ ,  $L = 100\mu H$

③  $I_{SD} \leq 4.5A$ ,  $di/dt \leq 110A/\mu s$ ,  $V_{DD} \leq 100V$ ,  $T_J \leq 150^{\circ}C$   
Suggested  $RG = 7.5 \Omega$

④ Pulse width  $\leq 300 \mu s$ ; Duty Cycle  $\leq 2\%$

**Case Outline and Dimensions — LCC-18**

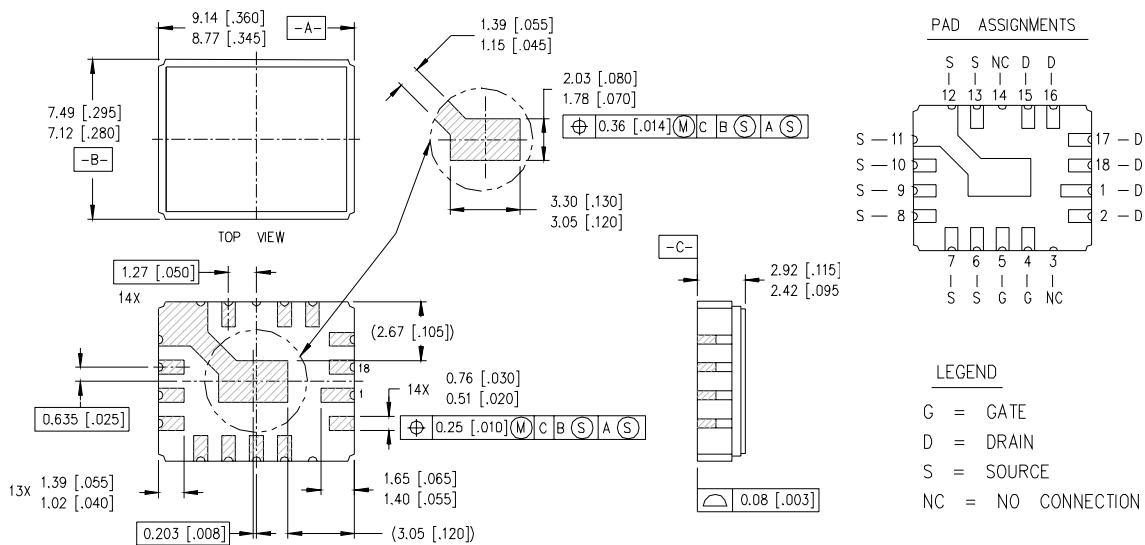

**NOTES:**

1. DIMENSIONING & TOLERANCING PER ANSI Y14.5M-1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105

**IR LEOMINSTER :** 205 Crawford St., Leominster, Massachusetts 01453, USA Tel: (978) 534-5776

TAC Fax: (310) 252-7903

Visit us at [www.irf.com](http://www.irf.com) for sales contact information.  
Data and specifications subject to change without notice. 08/2007