


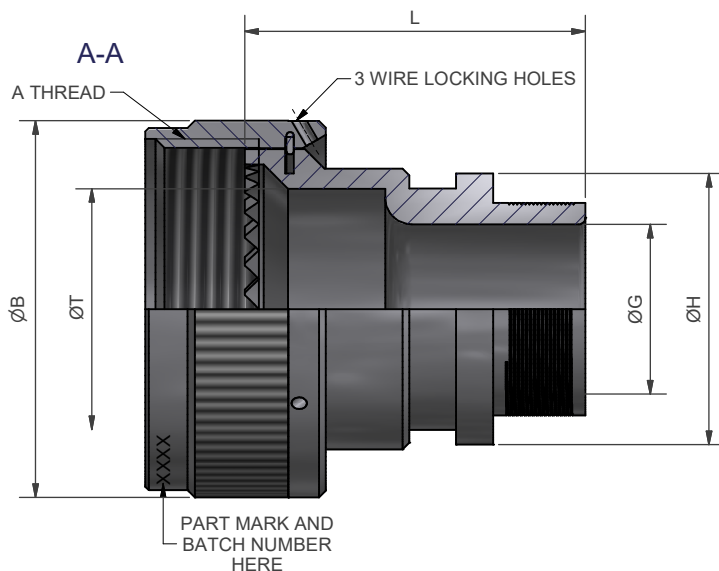


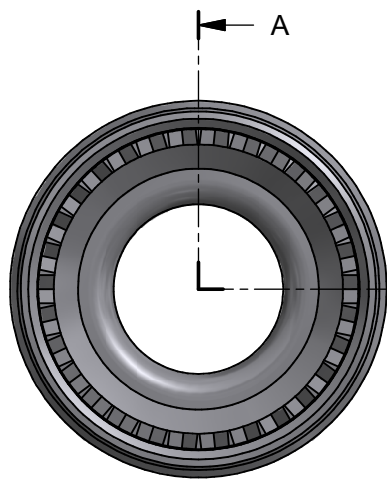

ANGLE 1

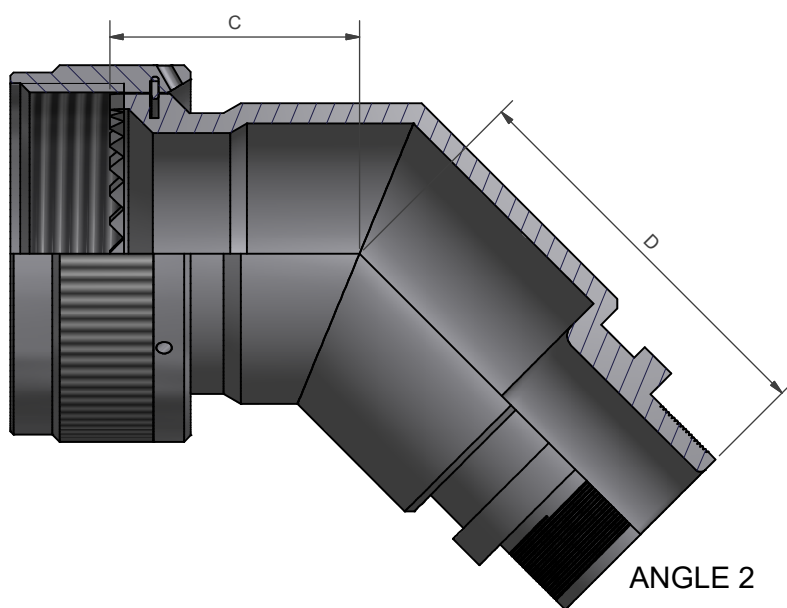


ANGLE 2

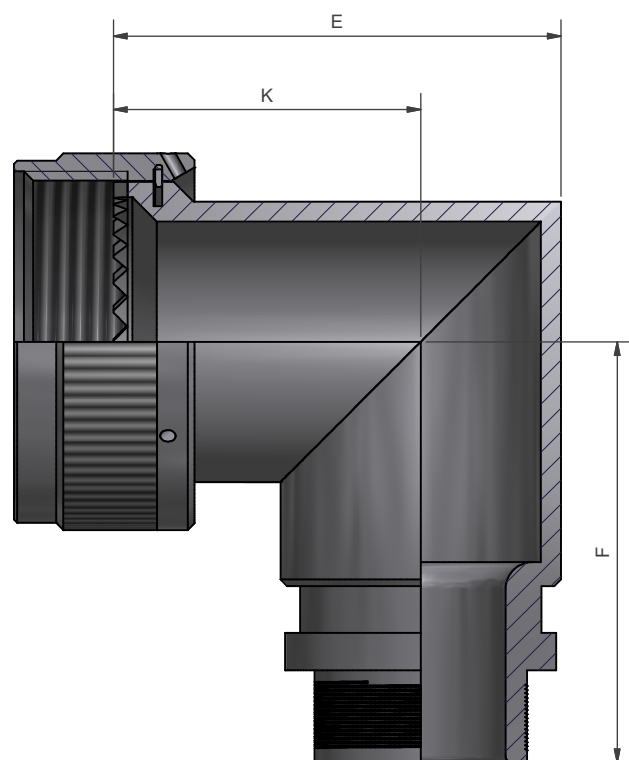

ANGLE 3

STAINLESS STEEL VERSION
AS FIG 4 AS85049

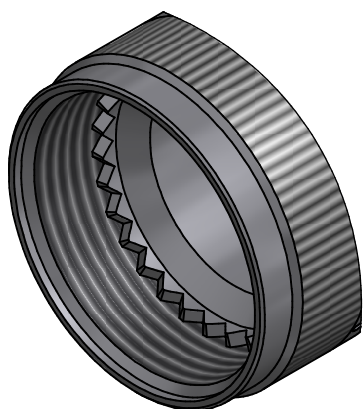

DRAWN	K.WINCZURA		DATE	01/06/2016			3RD ANGLE PROJECTION NOT TO SCALE		POLAMCO LTD www.polamco.com	WESTON LOCK LOWER BRISTOL ROAD BATH BA2 1EP	THIS DRAWING IS COPYRIGHT AND THE PROPERTY OF POLAMCO LTD IT MUST NOT BE COPIED, USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY.	
SALES APPR			DATE	01/06/2016								
DESIGN APPR					UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN MILLIMETRES GENERAL TOL LINEAR +/-0.25MM ANGULAR +/- 1°	ASSY USED ON: MIL-DTL-26482 SERIES II, MIL-DTL-83723 SERIES III						
PROD APPR	K.SHEPPARD		12/09/2012			TITLE: MEMORY RING BACKSHELL						
QUAL APPR												
ISSUE	REV	DCR		6273		MATERIAL STAINLESS STEEL	FINISH SEE PART NUMBER BREAKDOWN		PART NUMBER: 60A - STAINLESS STEEL		DRAWING NO: P9966	SHT 1
5												
NCAGE CODE U5792			WEIGHT									

TABLE 1

SHELL SIZE	A THREAD	ØB MAX	ØT MIN	C MAX	D MAX	E MAX	K ±0,5	F MAX	L MAX
03	9/16-24 UNEF	17,0	-	17,0	26,8	26,6	17,5	26,4	25,5
08	1/2-20 UNF	15,6	6,6	16,8	26,8	24,7	17,5	26,7	25,5
10	5/8-24 UNEF	18,6	9,3	17,0	27,5	26,7	18,8	28,5	25,5
12	3/4-20 UNEF	21,7	12,8	17,5	28,0	29,2	20,4	30,0	25,5
14	7/8-20 UNEF	24,9	14,7	18,3	29,0	30,7	21,5	31,5	25,5
16	1-20 UNEF	28,2	17,8	19,2	29,6	34,2	23,0	33,2	25,5
18	1 1/16-18 UNEF	30,9	19,8	19,4	30,5	37,2	24,0	33,2	25,5
20	1 3/16-18 UNEF	34,1	23,0	20,3	30,9	42,2	26,7	34,6	25,5
22	1 5/16-18 UNEF	37,3	26,2	20,5	31,1	44,2	29,5	36,2	25,5
24	1 7/16-18 UNEF	40,4	29,1	22,0	32,1	45,2	28,8	37,7	25,5
28	1 3/4-18 UNS	50,0	35,2	23,5	26,5	54,4	-	42,4	36,0
32	2-18 UNS	56,3	-	25,2	28,3	60,9	33,5	45,8	40,0
36	2 1/4-16 UN	62,7	-	26,4	29,5	67,4	-	48,9	45,0
40	2 1/2-16 UN	69,0	-	28,8	30,5	73,4	-	51,9	50,5
44	2 3/4-16 UN	75,4	-	30,3	32,5	79,7	-	55,1	50,5
48	3-16 UN	81,7	-	31,5	33,7	86,0	-	58,2	50,5
61	1 1/2-18 UNEF	42,0	-	22,3	32,1	48,0	-	39,2	28,0

TABLE 2

ENTRY SIZE	ØG MIN	ØH MAX
04	6,35	14,3
05	7,92	15,8
06	9,53	17,4
07	11,10	19,0
08	12,70	20,6
10	15,88	23,8
12	19,05	27,0
14	22,23	30,1
16	25,40	33,3
18	28,58	36,5
20	31,75	39,7
22	34,93	42,8
24	38,10	46,0

60A1-16-08-4-J-A

SERIES _____

CONNECTOR INTERFACE _____

ANGLE _____

1 - STRAIGHT,
2 - 45°
3 - 90°

SHELL SIZE (TABLE 1) _____

ENTRY SIZE (TABLE 2) _____

MATERIAL _____

STAINLESS STEEL

FINISH _____

PASSIVATE, SEE WEBSITE FOR
OTHER OPTIONS

RING OPTION _____

A - SINGLE BRAID,
B - DOUBLE BRAID,
OMIT IF NO RING IS REQUIRED

DRAWN	K.WINCZURA	DATE	01/06/2016	 3RD ANGLE PROJECTION NOT TO SCALE	 POLAMCO LTD www.polamco.com	WESTON LOCK LOWER BRISTOL ROAD BATH BA2 1EP	THIS DRAWING IS COPYRIGHT AND THE PROPERTY OF POLAMCO LTD IT MUST NOT BE COPIED, USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY.
SALES APPR		01/06/2016					
DESIGN APPR				UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN MILLIMETRES GENERAL TOL LINEAR +/-0.25MM ANGULAR +/- 1°	ASSY USED ON: MIL-DTL-26482 SERIES II, MIL-DTL-83723 SERIES III		
PROD APPR	K.SHEPPARD	12/09/2012			TITLE:	MEMORY RING BACKSHELL	
QUAL APPR				MATERIAL STAINLESS STEEL			
ISSUE	REV	DCR	6273	FINISH SEE PART NUMBER BREAKDOWN	PART NUMBER:	60A - STAINLESS STEEL	DRAWING NO: SHT
NCAGE CODE U5792	WEIGHT						P9966 2