

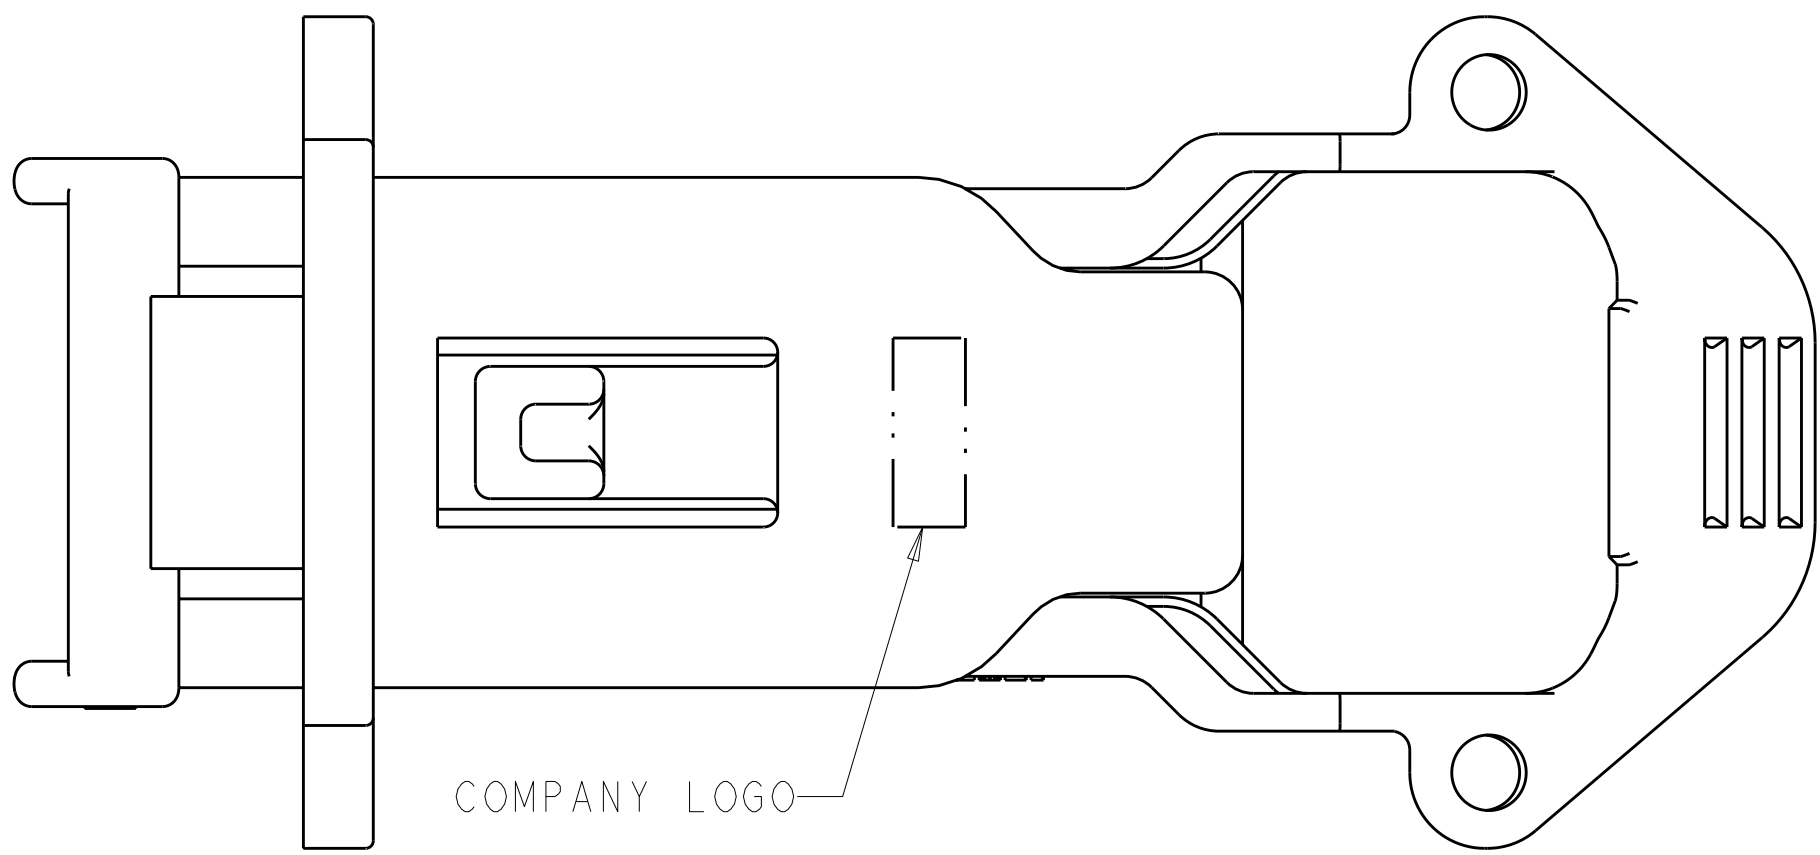
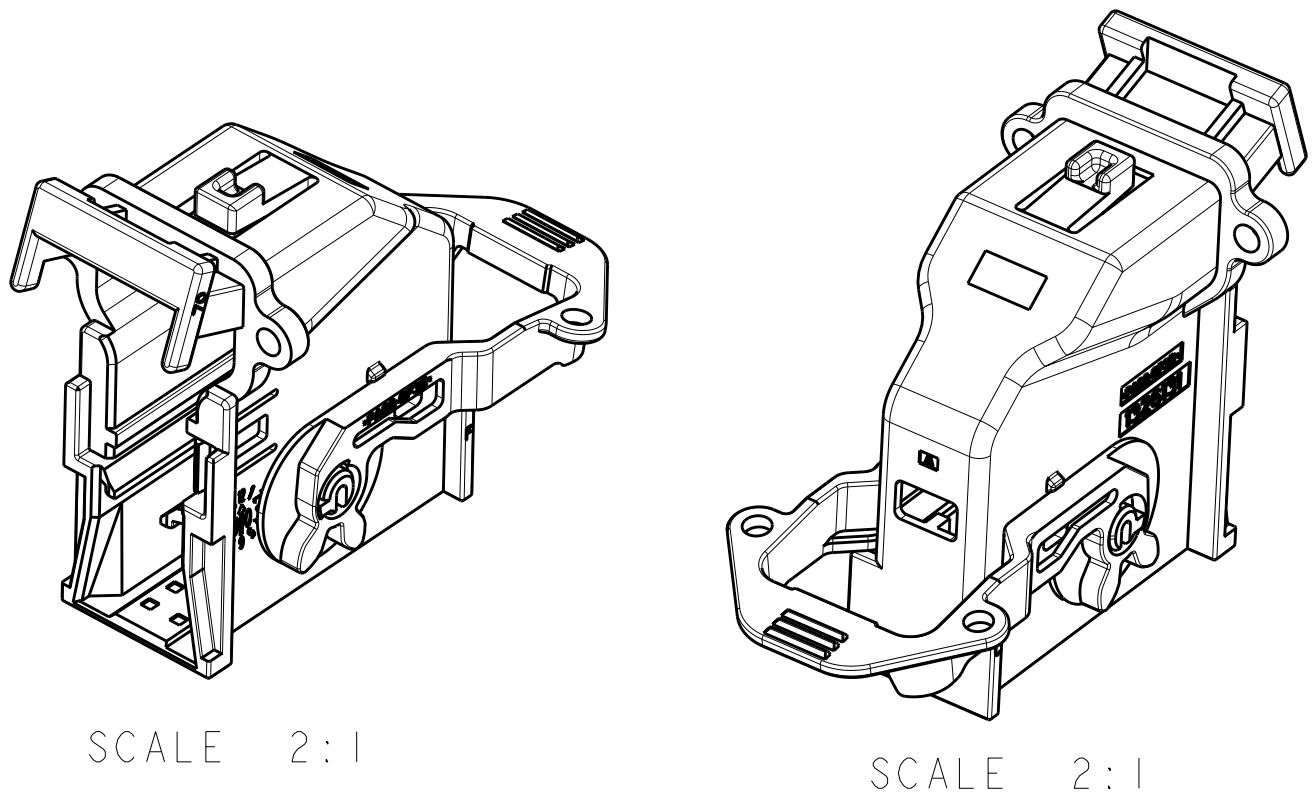
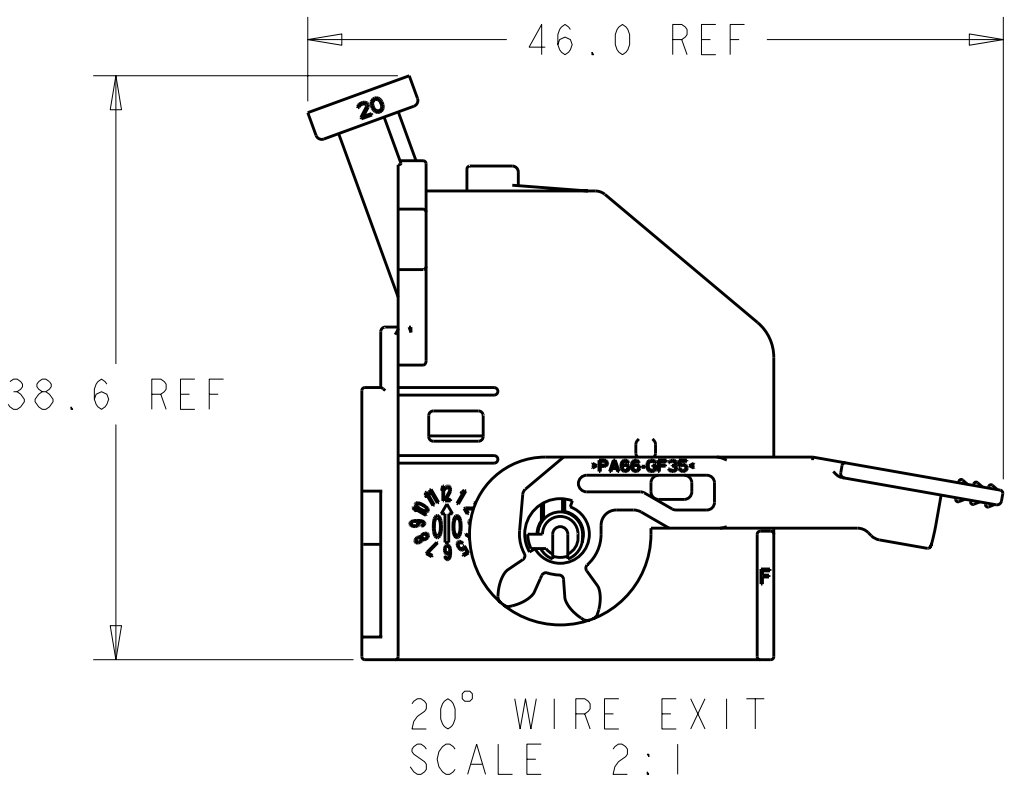


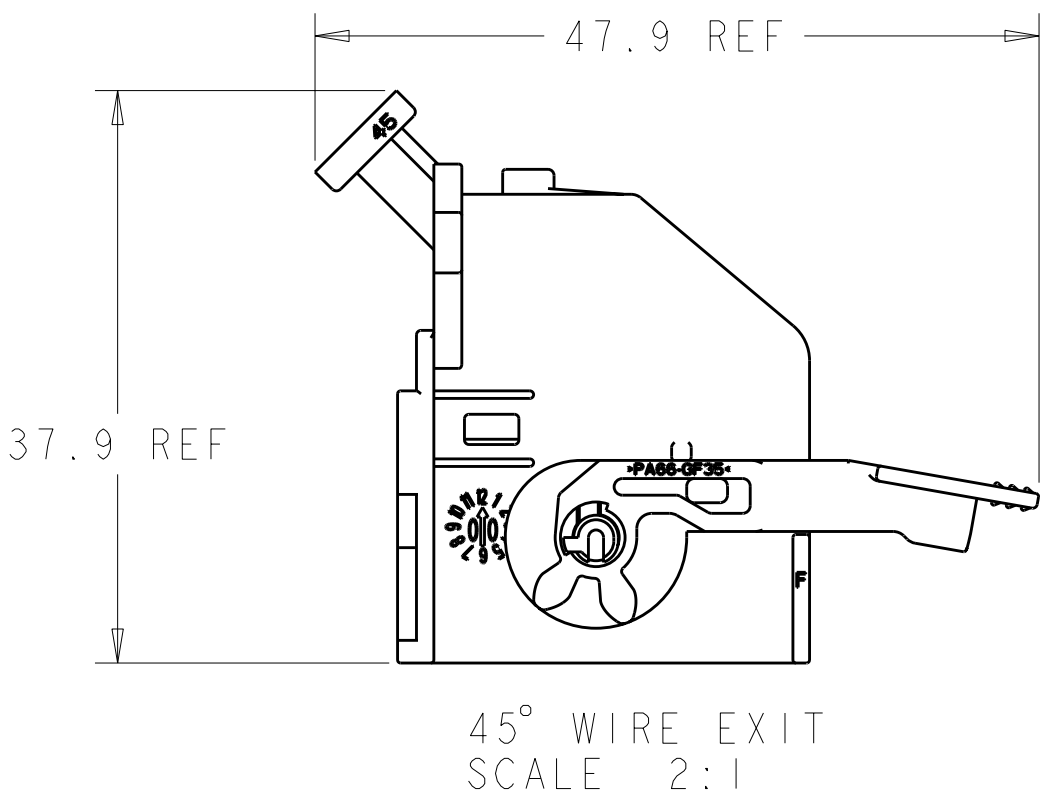







- NOTE:
- △ MATERIAL: SHIELD - 35% GLASS REINFORCED NYLON. SEE TABLE BELOW FOR COLOR.
LEVER - 35% GLASS REINFORCED NYLON.
COLOR GREY.
 - REFERENCE: RECEPTACLE HOUSING, 1326133-1 USED WITH THIS ASSEMBLY.
 - REFER TO INSTRUCTION SHEET 408-8662 FOR PRODUCT ASSEMBLY AND DISASSEMBLY PROCEDURES.
 - REFER TO USCAR-2 REV 3 APRIL 2001 FOR PRODUCT SPECIFICATIONS.
 - REFER TO DRAWING NO. AUAUT00000-2962-0536 FOR INTERFACE DETAILS.

LOC	DIST	REVISIONS					
FX	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			O	RELEASED PER EC# OK80-0282-02	01JAN03	SPT	AME
			A	REV PER EC OK80-0239-03	08JUL2003	RGV	AME
			AI	REV PER ECR-10-011823	28MAY2010	VSS	CS

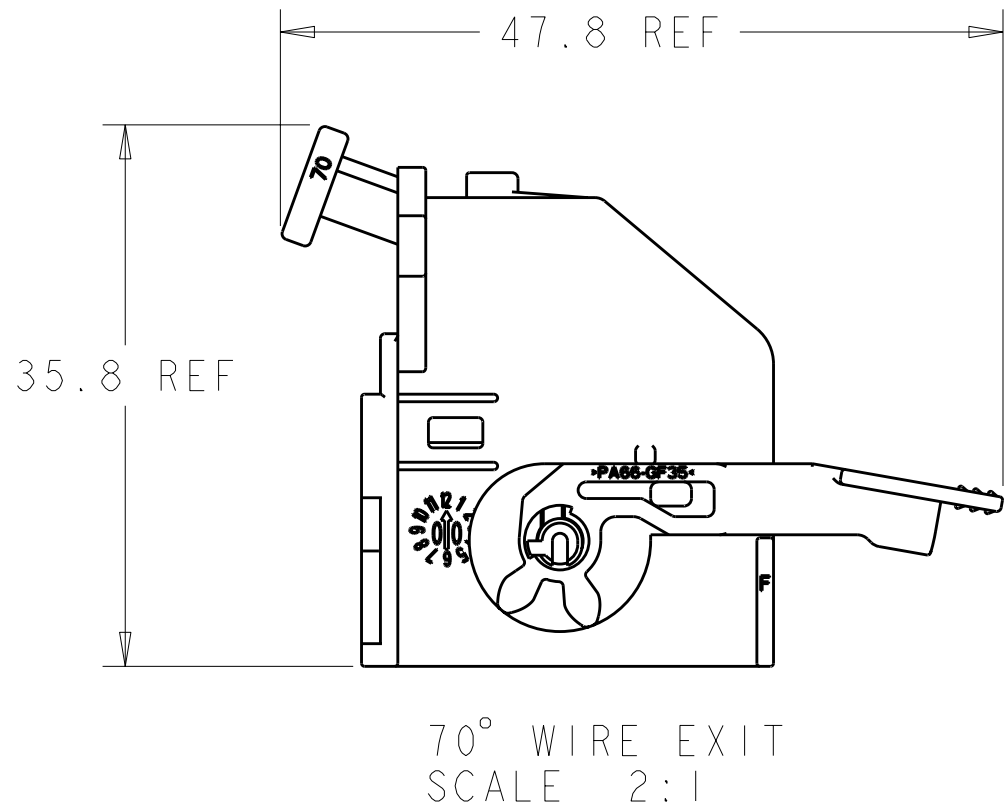

WIRE EXIT OPTIONS
REFERENCE ONLY



20°	GREEN	C-E	I-1326132-2
20°	PURPLE	B-F	I-1326132-1
20°	NATURAL	B-E	I-1326132-0
20°	BLACK	C-F	I326132-9
45°	GREEN	C-E	I326132-8
45°	PURPLE	B-F	I326132-7
45°	NATURAL	B-E	I326132-6
45°	BLACK	C-F	I326132-5
70°	GREEN	C-E	I326132-4
70°	PURPLE	B-F	I326132-3
70°	NATURAL	B-E	I326132-2
70°	BLACK	C-F	I326132-1
DIM-W	COLOR	KEYING OPT.	PART NO.

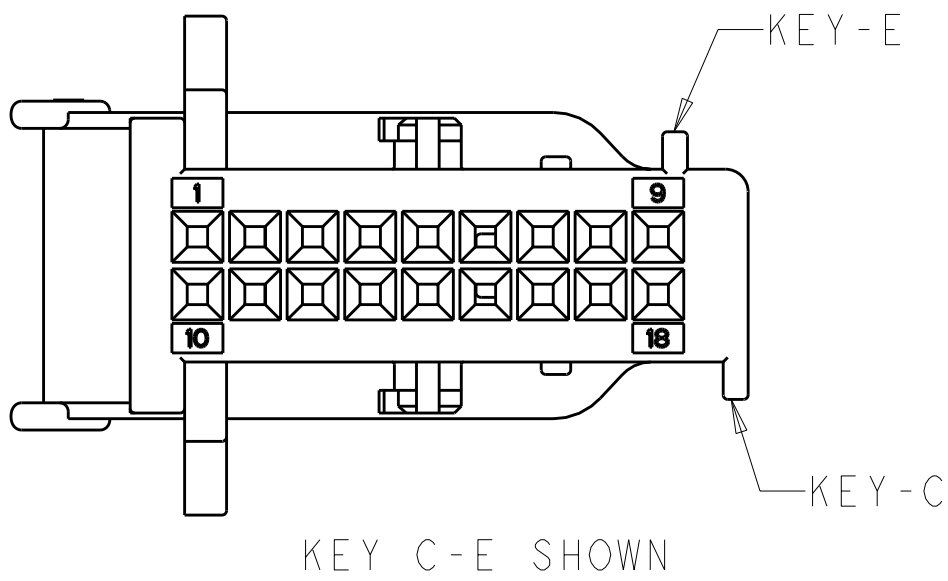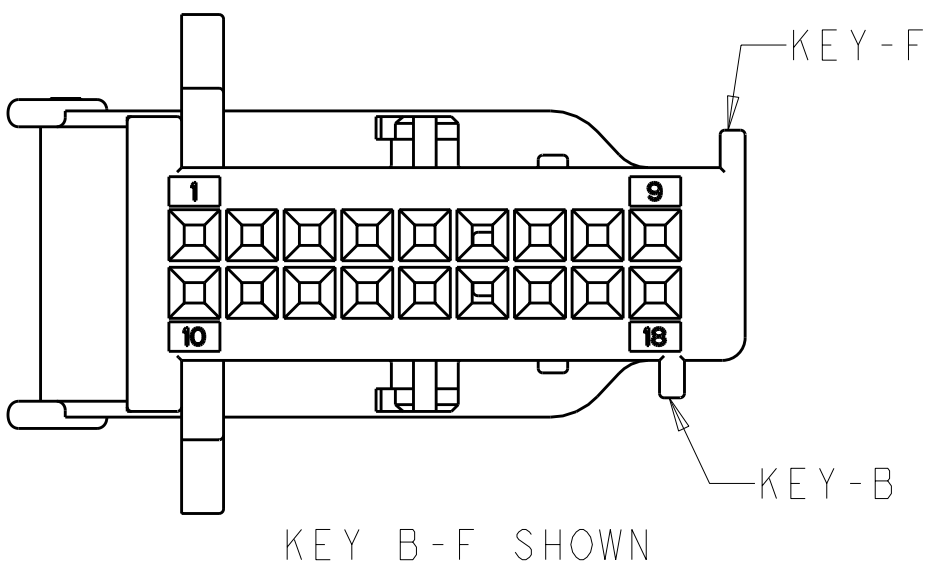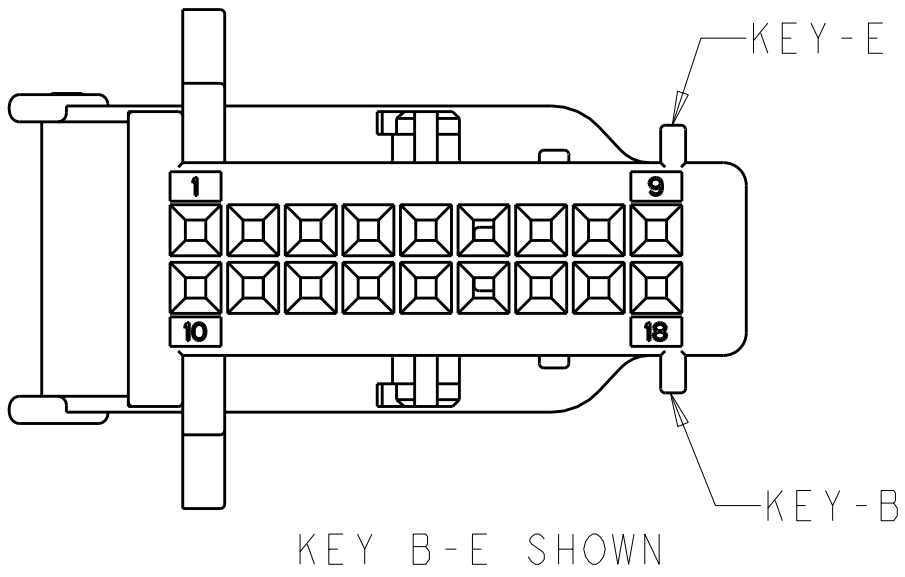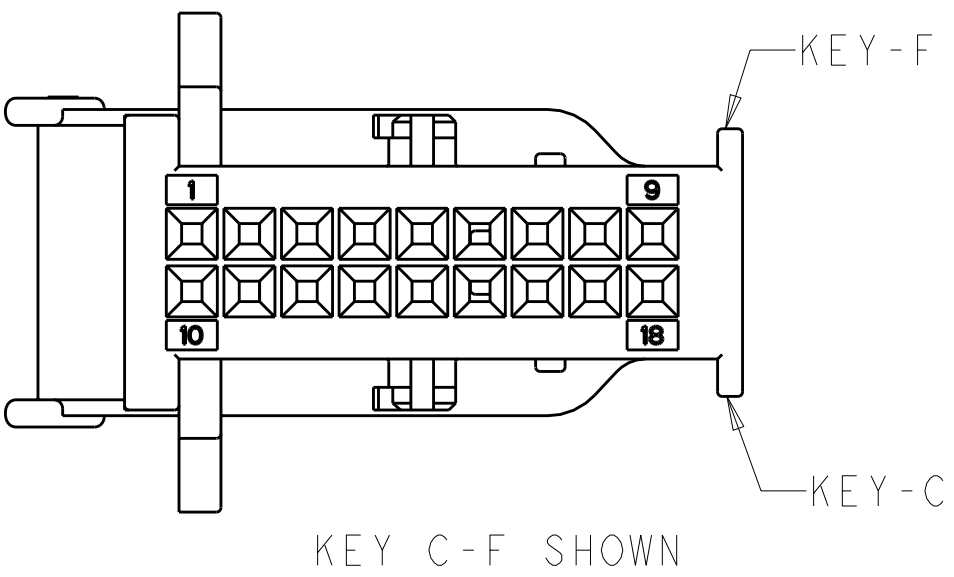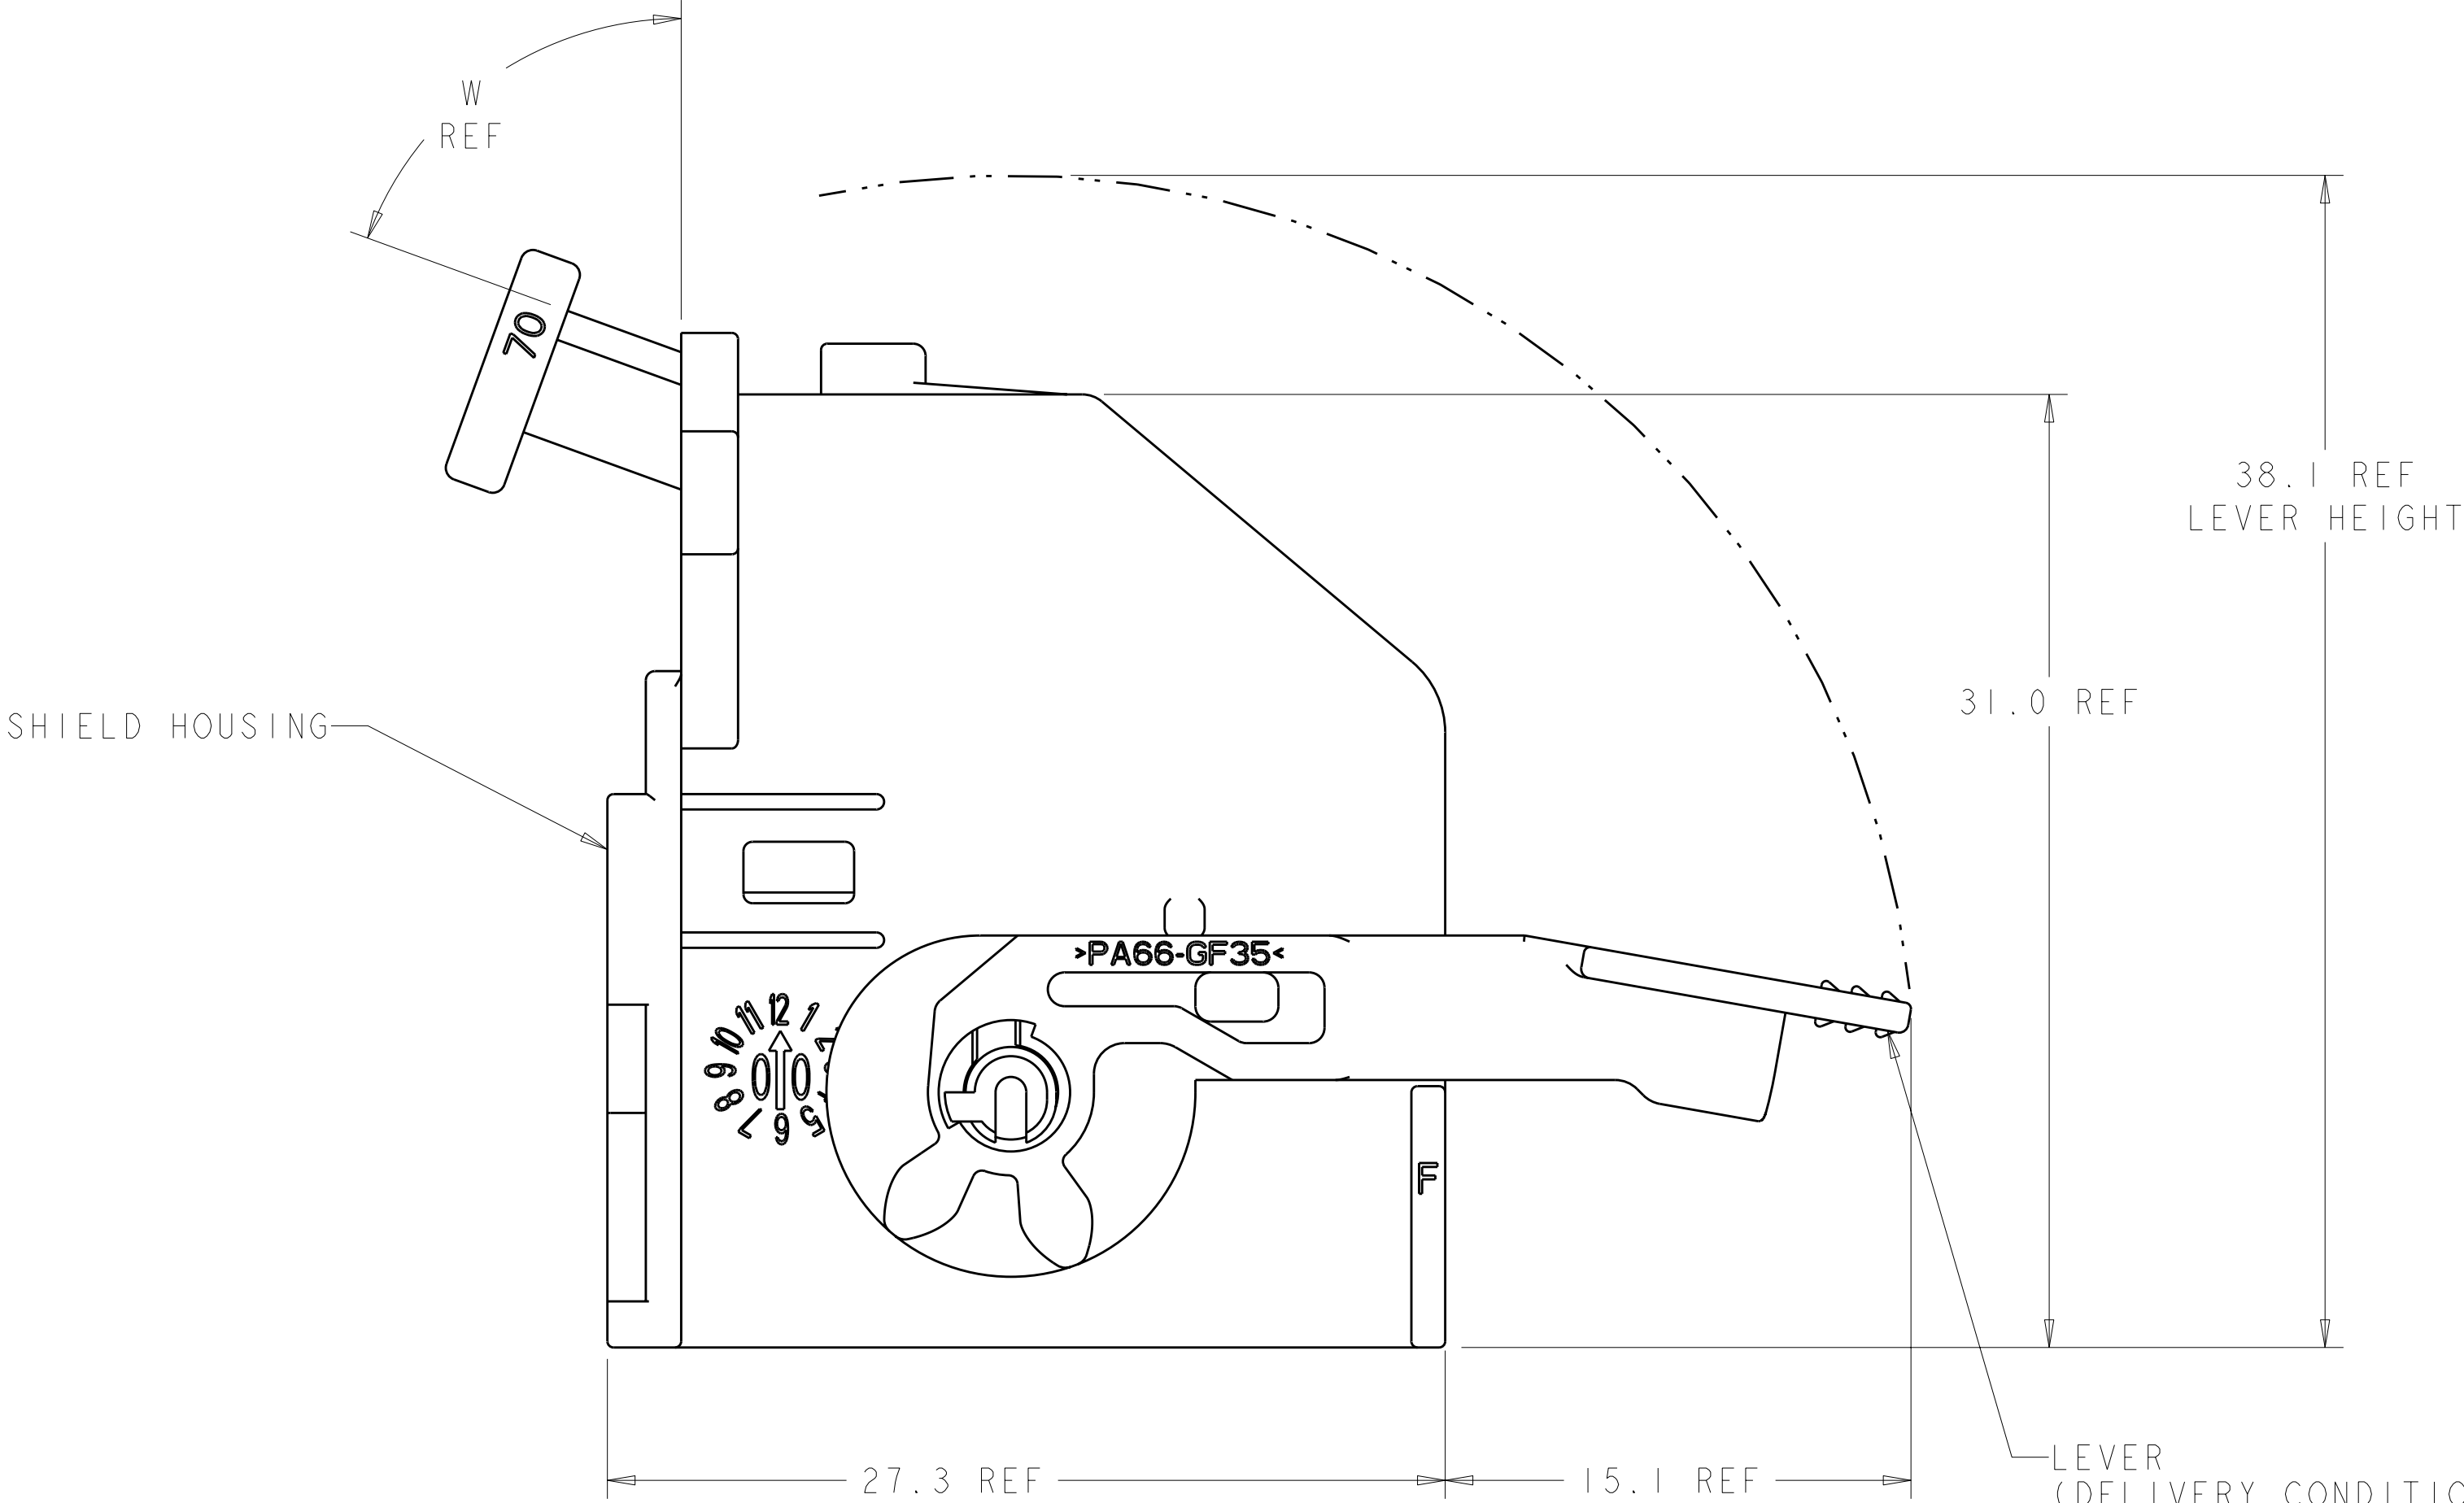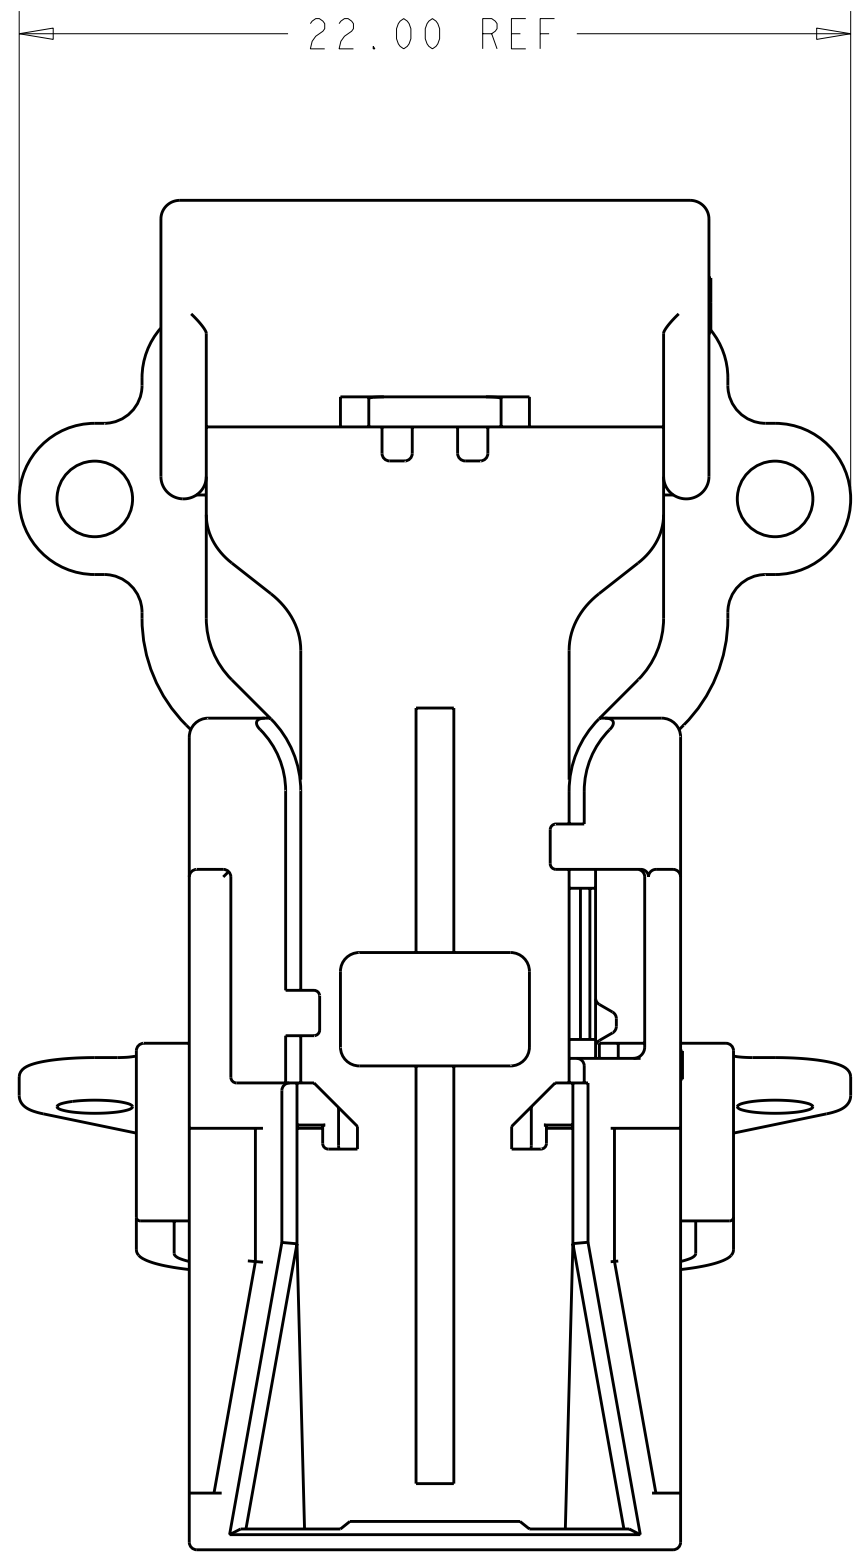





KEYING OPTIONS
REFERENCE ONLY

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN C. CHAVEZ 04APR2002		Tyco Electronics Harrisburg, PA 17105-3608	
mm		9 PLC ±.1 1 PLC ±0.1 2 PLC ±0.05 3 PLC ±. 4 PLC ±. ANGLES ±1°		CHK S. TPBEY 04APR2002		NAME SHIELD ASSEMBLY, 18 POSITION, 0.64MM LEVER ASSIST CONNECTOR	
		FINISH		PRODUCT SPEC		SIZE A1	
MATERIAL		FINISH		APPLICATION SPEC		CAGE CODE 00779	
CUSTOMER DRAWING		WEIGHT		DRAWING NO C=1326132		RESTRICTED TO	
		SCALE 4:1		SHEET 1 OF 2		REV A1	



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FX	00		-	SEE SHEET I	-	-	-

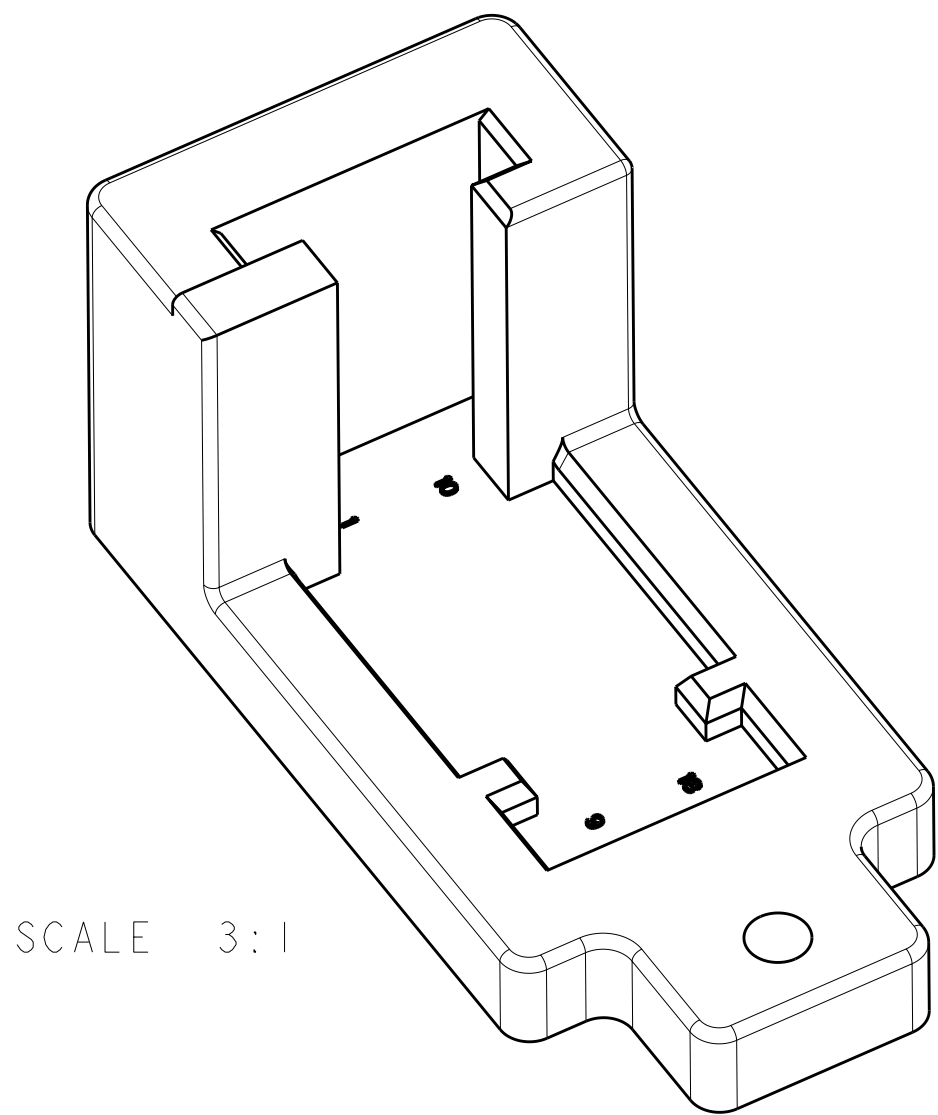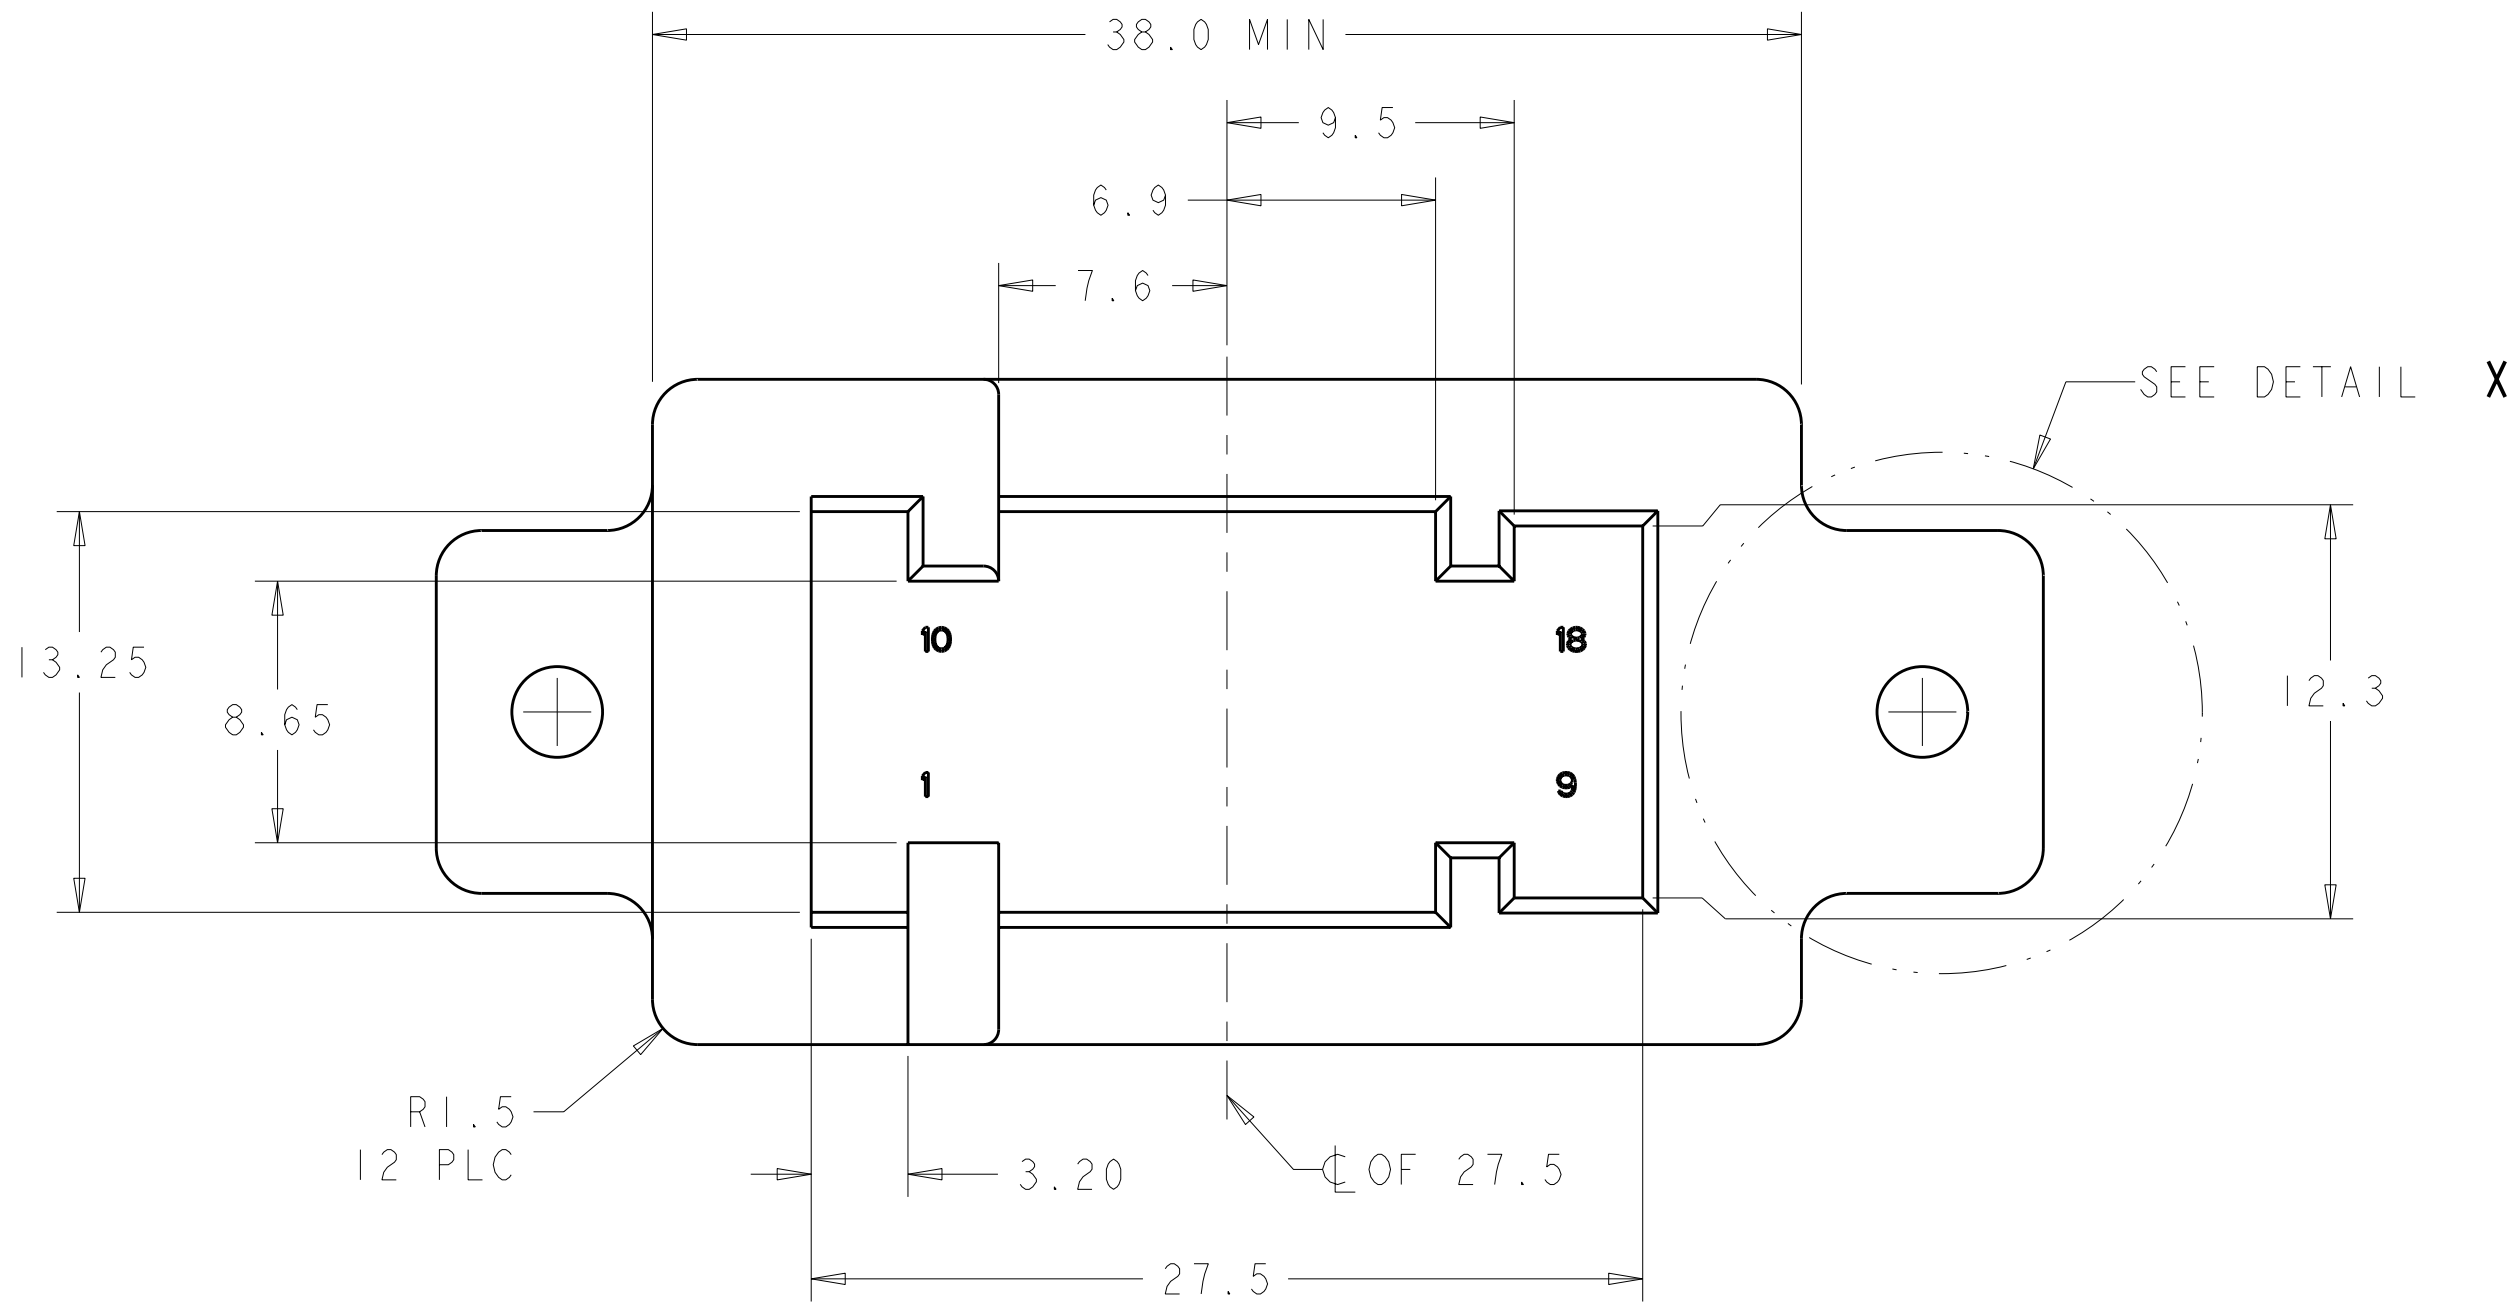


SCALE 3:1

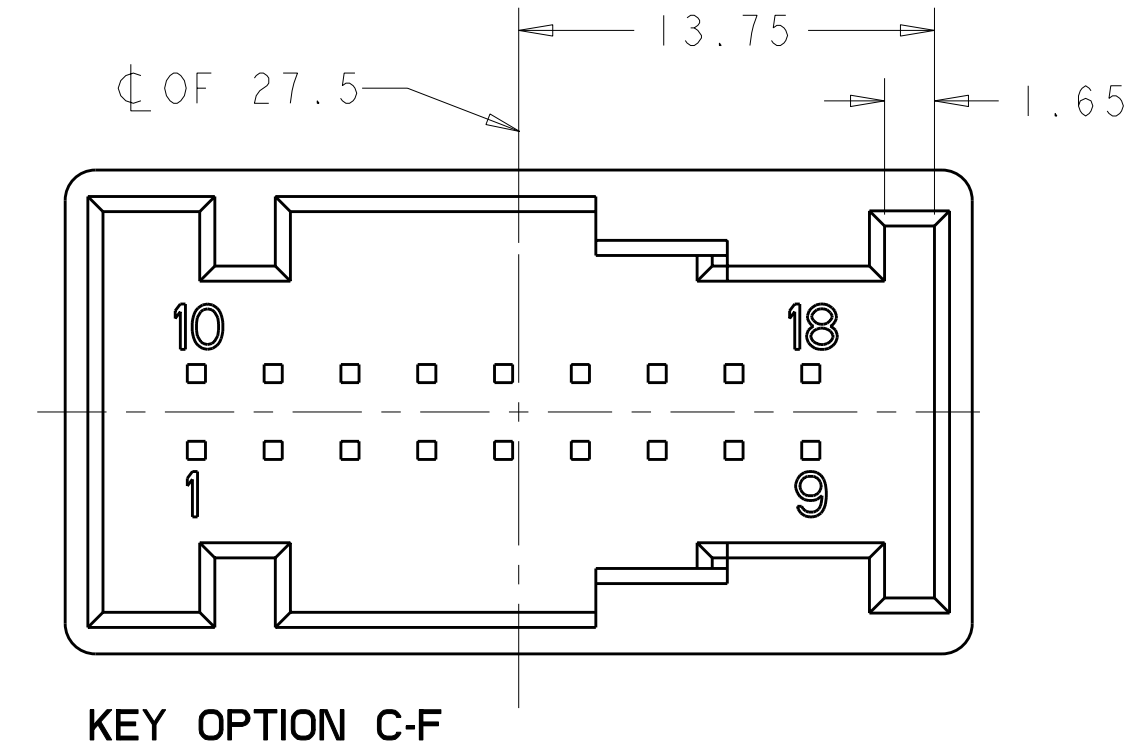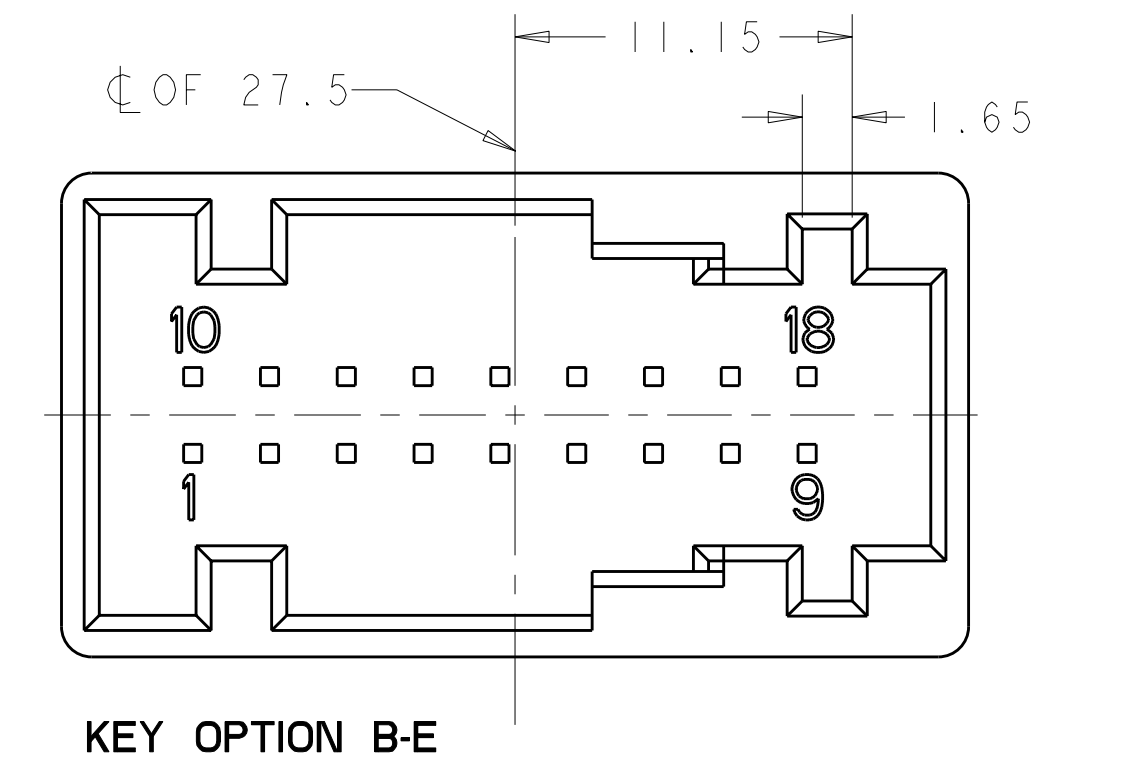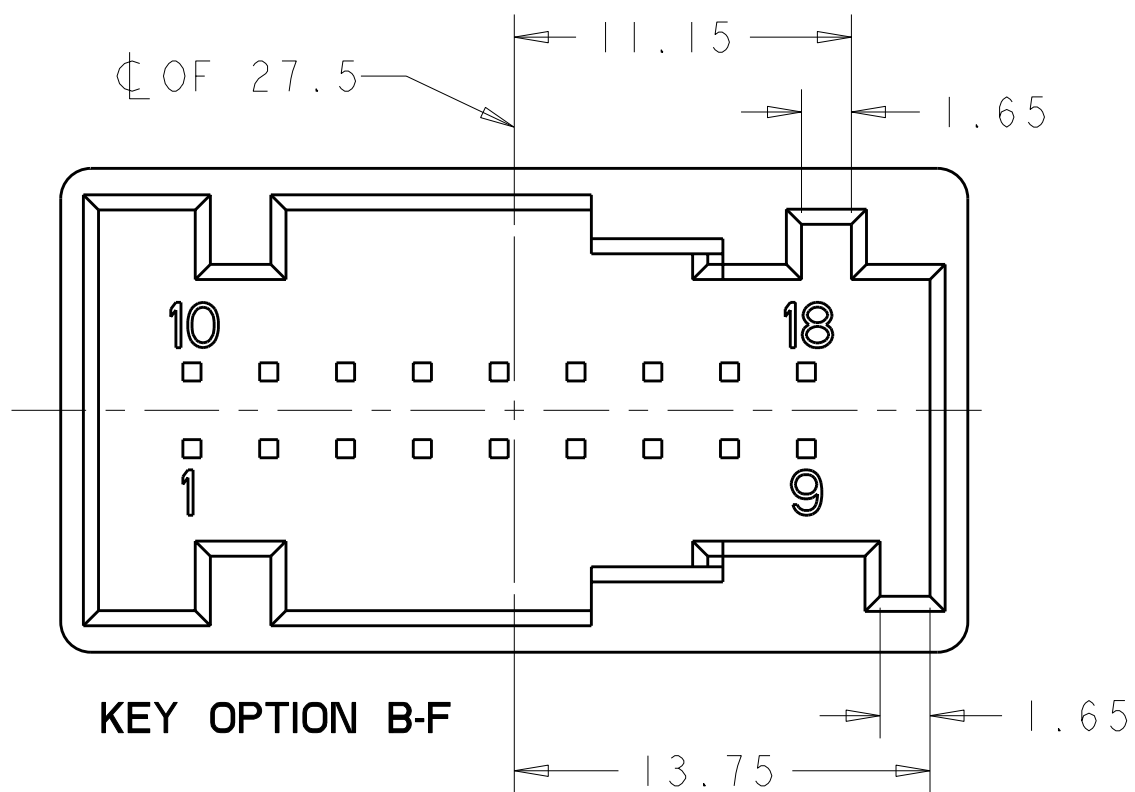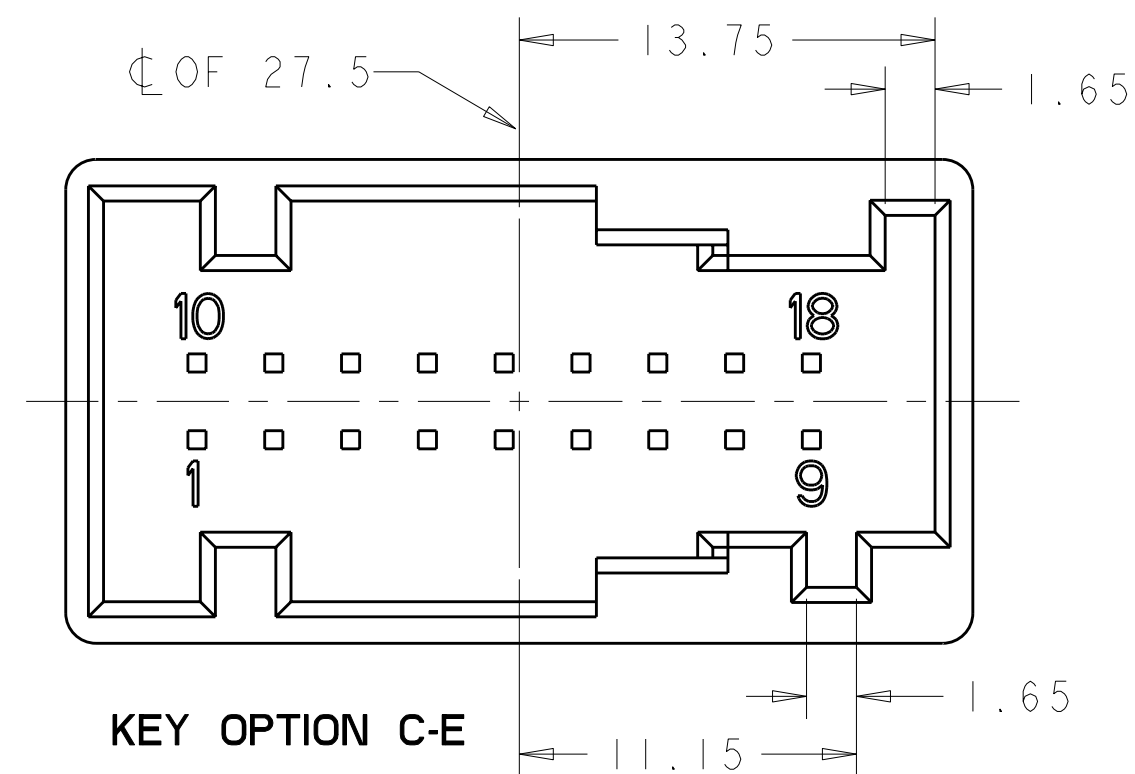

KEYING OPTIONS

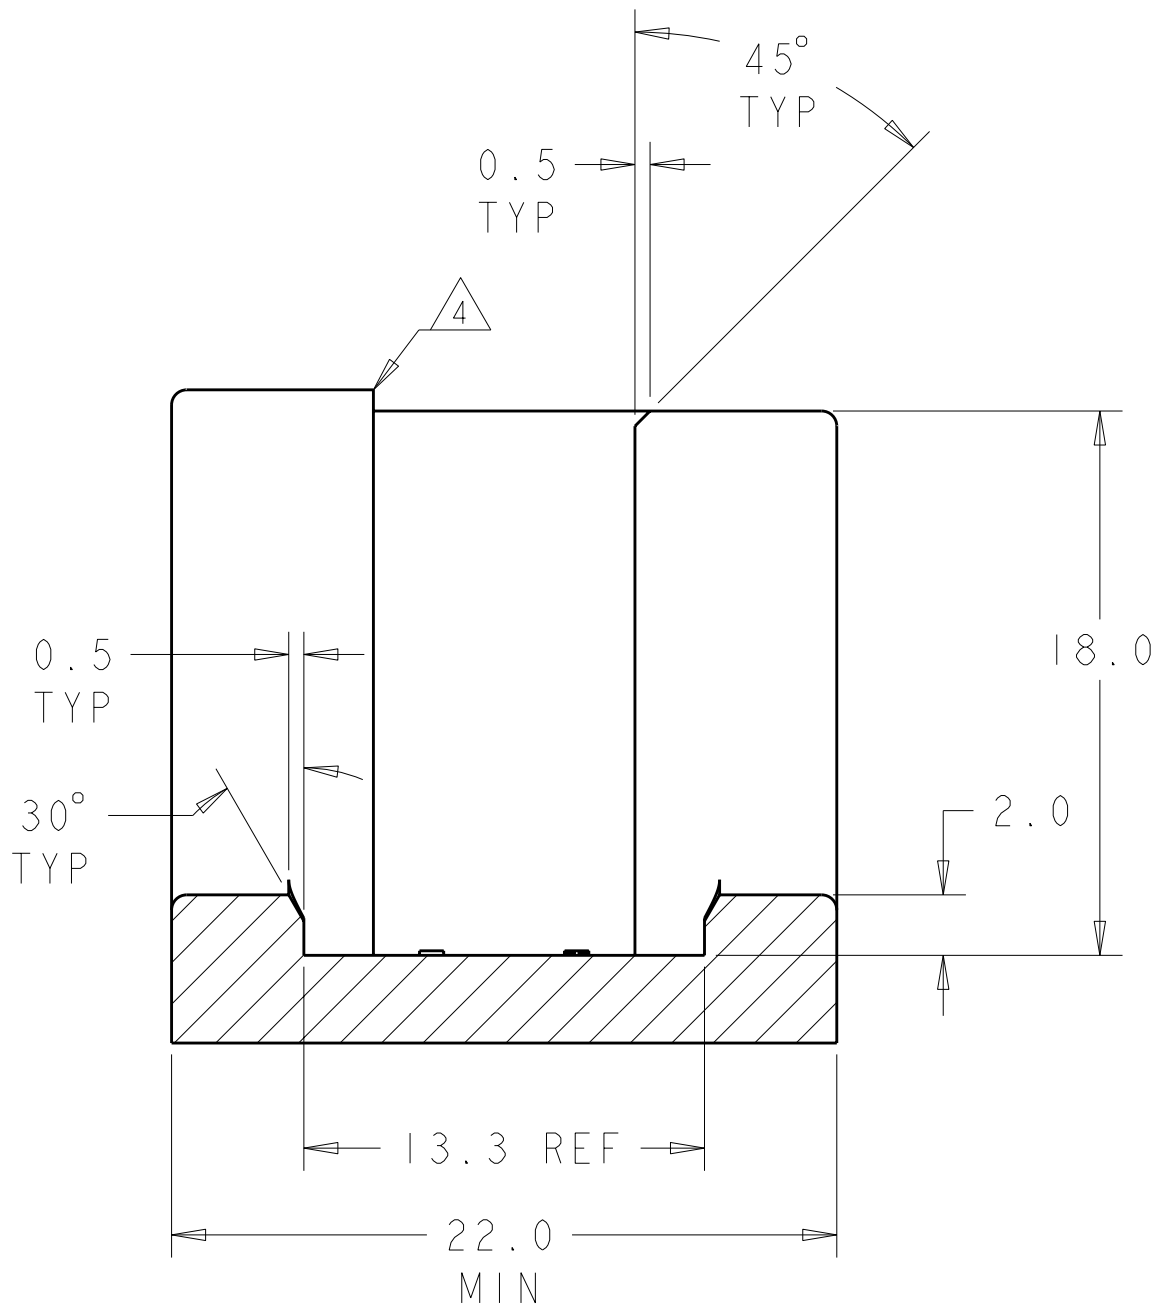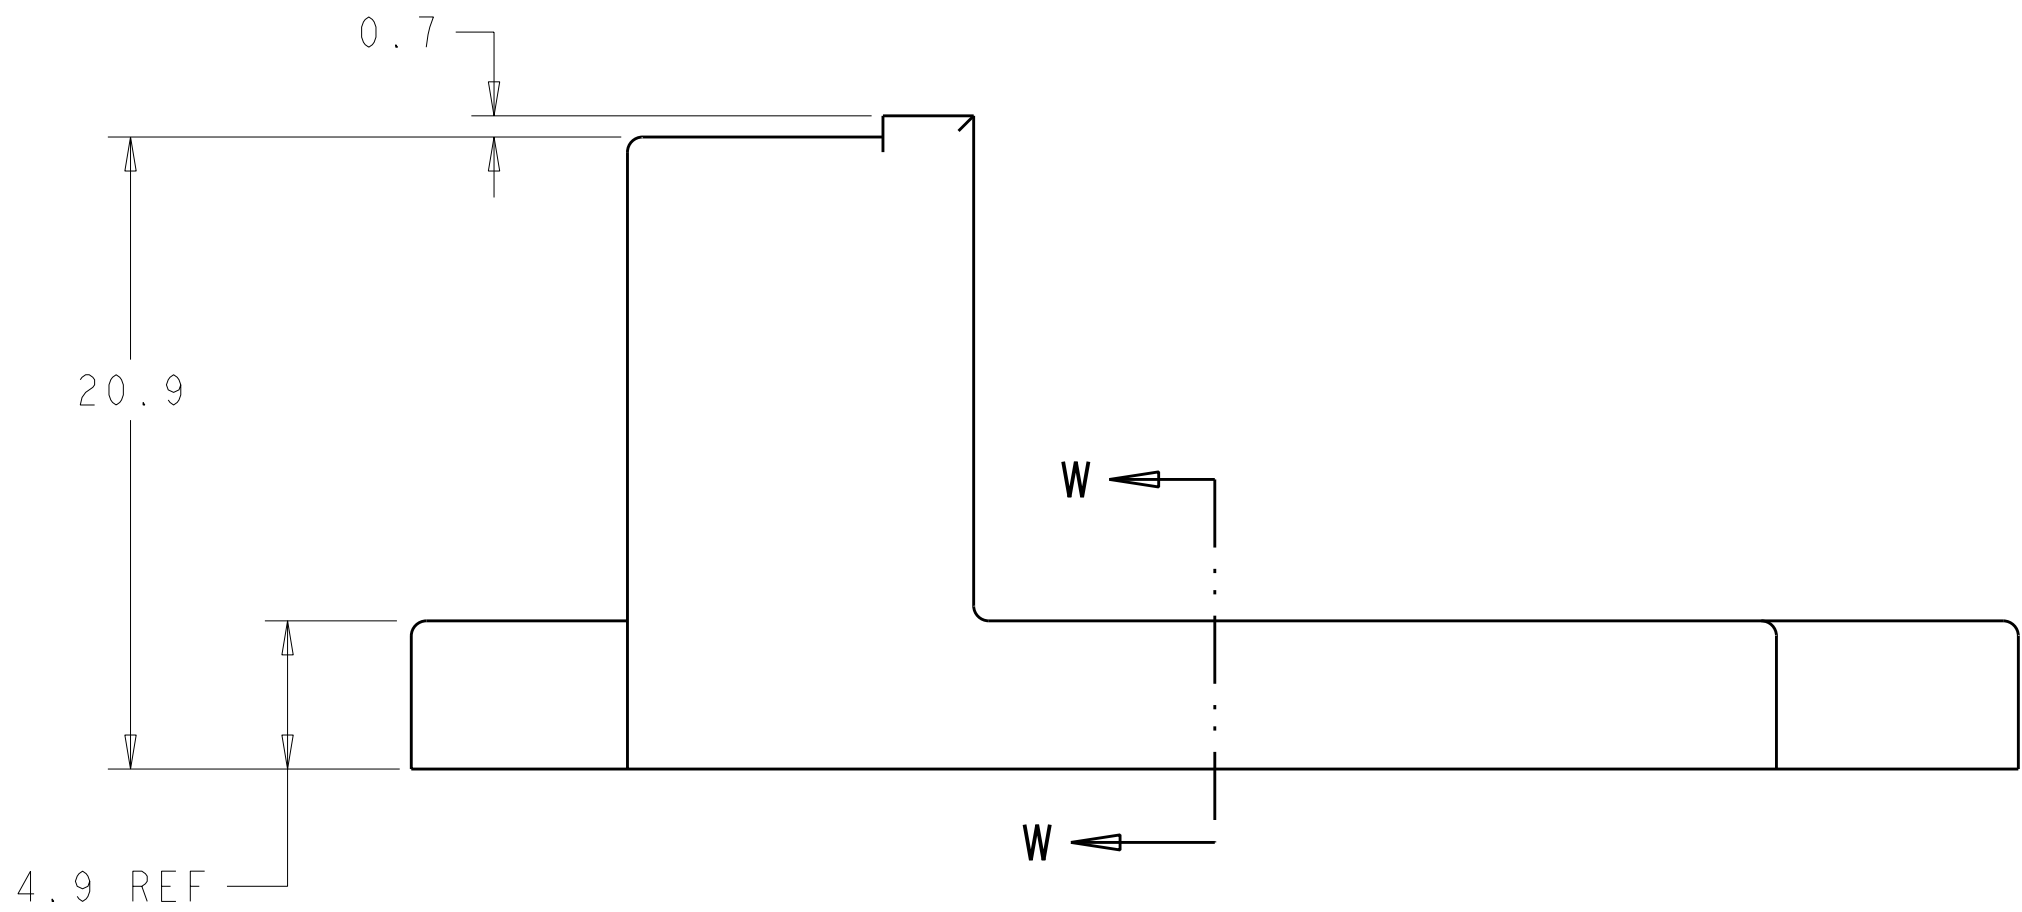

SECTION W-W

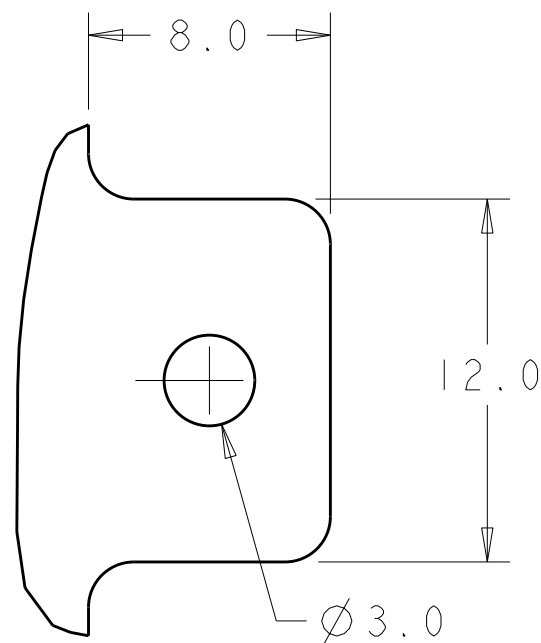

DETAIL X
SCALE 4:1
2 PLC

18 POSITION CONNECTOR FIXTURE (SHOWN WITH CLEARANCE FOR ALL KEY OPTIONS)

- CONNECTOR FIXTURE SHOULD BE USED TO VERIFY THE RECEPTACLE CARRIER IS PROPERLY SEATED AND LOCKED INTO THE SHIELD ASSEMBLY. THE CONNECTOR WILL NOT FULLY MATE TO THE FIXTURE IF THE RECEPTACLE CARRIER IS OUT OF POSITION.
- RECOMMEND USING A SENSING DEVICE FOR VERIFYING FULLY MATED CONNECTORS. SUCH A DEVICE IS UP TO THE CUSTOMERS DISCRETION.
- RECOMMENDED MATERIAL: HARDEND STEEL
- NO RADII OR CHAMFER PERMITTED IN SPECIFIED AREA. MUST MAINTAIN 90° EDGE.
- RADII TO BE 0.5 UNLESS OTHERWISE SPECIFIED.
- OPTIONAL CONSTRAINT FEATURE.

THIS DRAWING IS UNPUBLISHED. IT IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED. IT IS TO BE KEPT IN THE ORIGINAL FORM AND NOT REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS CORPORATION, NO PART OF THIS DRAWING MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS CORPORATION, NO PART OF THIS DRAWING MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.				DWN C. CHAVEZ 04APR2002	Tyco Electronics Harrisburg, PA 17105-3608	
EWM S. TPBEY 04APR2002				NAME	SHIELD ASSEMBLY, 18 POSITION, 0.64MM LEVER ASSIST CONNECTOR	
APVD				PRODUCT SPEC	-	
APVD				APPLICATION SPEC	-	
MATERIAL				WEIGHT	-	
FINISH				CUSTOMER DRAWING	-	
DIMENSIONS:				SIZE	CAGE CODE	DRAWING NO
mm				A1	00779	C=1326132
TOLERANCES UNLESS OTHERWISE SPECIFIED:				SCALE	4:1	SHEET 2 OF 2
9 PLC ±.1				REV	A1	
1 PLC ±0.1						
2 PLC ±0.05						
3 PLC ±.1						
4 PLC ±.1						
ANGLES ±1°						