


ALL DIMENSIONS IN BRACKETS ARE IN MM AND ARE FOR REFERENCE PURPOSE ONLY


2234000K001-835-C

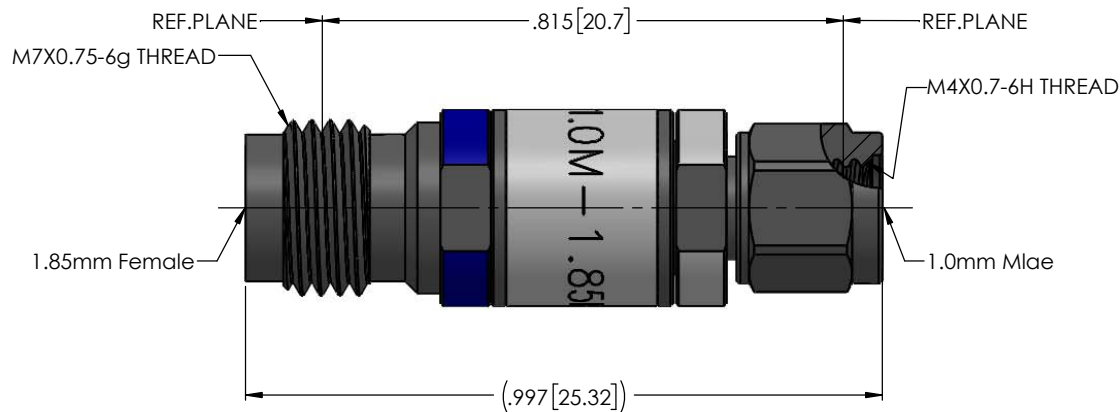

ELECTRICAL SPECIFICATIONS	
FREQUENCY RANGE	DC- 65GHz
VSWR	1.35 Max @ 65GHz
INSERTION LOSS	0.50dB Max@ 65GHz
WORKING VOLTAGE@SEA LEVEL	150 Vrms
DWV@SEA LEVEL	500 Vrms
INSULATION RESISTANCE	5000MΩ
MECHANICAL SPECIFICATIONS	
DURABILITY	500 CYCLES MIN
COUPLING NUT TORQUE - RECOMMENDED	2.6-3.6 IN.LBS [0.3 -0.41 N.m]
CONTACT CAPTIVATION	≥2.25 LBS [10N]
ENVIRONMENTAL SPECIFICATIONS	
TEMP RANGE	-55° TO +125° C

NOTES:

- ASSEMBLED CONNECTOR INTERFACE IS DESIGNED IN ACCORDANCE WITH IEC61169-32(1.85mm) & IEC61169-31(1.0mm).

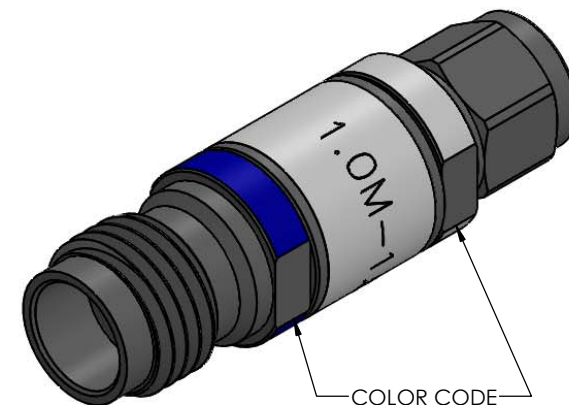


LOCKING RING	BERYLLIUM COPPER PER ASTM B196, C17300, TEMPER TD04	N/A
HEX NUT	CORROSION RESISTANT STEEL PER ASTM 582, S30300, COND. A	PASSIVATE PER SAE-AMS-2700
INSULATOR - HIGH FREQUENCY	NORYL EN265, POLYPHENYLENE OXIDE (PPO), PER ASTM D-4349 PPE220B50541 F13 G1106	N/A
CONTACT - HIGH FREQUENCY	BERYLLIUM COPPER PER ASTM B196, C17300, TEMPER TD04	GOLD PLATE PER ASTM B488
BUSHING - HIGH FREQUENCY	BRASS PER ASTM B16, C36000 ALLOY, TEMPER H02	GOLD PLATE PER ASTM B488
BODY - HIGH FREQUENCY	CORROSION RESISTANT STEEL PER ASTM 582, S30300, COND. A	PASSIVATE PER SAE-AMS-2700
DESCRIPTION	MATERIAL	FINISH

Table 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DELTA ELECTRONICS (NANJING) CO., LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DELTA ELECTRONICS (NANJING) CO., LTD. IS PROHIBITED.

FILE NAME: 2234000K001-835T-C

UNLESS OTHERWISE SPECIFIED:		NAME		DATE		DELTA MICROWAVE ELECTRONICS (NANJING) CO., LTD			
<div>DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL 1/64 ANGULAR: MACH 1° BEND 1° TWO PLACE DECIMAL .01 THREE PLACE DECIMAL .005 MAX CORNER BREAK = .005 MAX T.I.R. = .004 SURFACE FINISH = 63 or BETTER Ø DENOTES CRITICAL DIMENSION</div> <div>THIRD ANGLE PROJECTION</div> <div></div> <div>MATERIAL</div> <div>SEE TABLE</div> <div>FINISH</div> <div>SEE TABLE</div> <div>SCALE:</div>		DRAWN	VINCENT	8/17/2020		www.DeltaRF.com / Ph: 025-84195408/ Fax: 025-84195407			
		CHECKED	JAMES	8/17/2020		TITLE: 1.0mm MALE TO 1.85mm FEMALE STRAIGHT ADAPTER			
		ENG APPR.	JAMES	8/17/2020					
		COMMENTS:						SIZE	
						B		2234000K001-835-C	-
						CODE ID - 00795		WEIGHT: 6.20 g	SHEET 1 OF 1