

Terminal Part Number: 12084202

Surface Plating: AU

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,35 | 0,50

Cable Type codes: 1005

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,45 - 1,88

Seal(s): 15324974 | 15324976

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,35 / 15324974		1,60	55	0,85	0,05	1,80	0,10	3,70	0,10	4,10	0,10
1005 0,50 / 15324976		1,74	80	0,90	0,05	1,80	0,10	3,90	0,10	4,10	0,10

Cable type code legend:

1005:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, PVDF, XLPE

Insul. Wall Designator: THIN

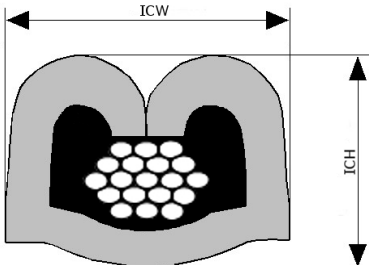

Terminal Part Number: 12084202
Surface Plating: AU
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*


Cable Type codes: 1005
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 1,60 - 1,88
Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,50 / 15324976		1,74	80	0,90	0,05	1,80	0,10	3,90	0,10	4,10	0,10

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

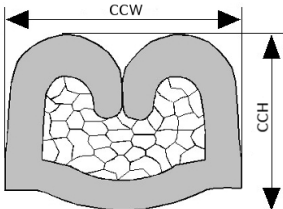

Terminal Part Number: 12084202
Surface Plating: AU
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1007
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,80 - 2,30
Seal(s): 15324974 | 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,35 / 15324974		1,95	55	0,85	0,05	1,80	0,10	3,80	0,10	4,10	0,10
1007 0,50 / 15324973		2,15	80	0,90	0,05	1,80	0,10	3,90	0,10	4,10	0,10

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

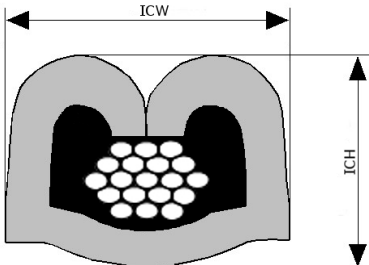

Terminal Part Number: 12084202
Surface Plating: AU
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1007
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,00 - 2,30
Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,50 / 15324973		2,15	80	0,90	0,05	1,80	0,10	3,90	0,10	4,10	0,10

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

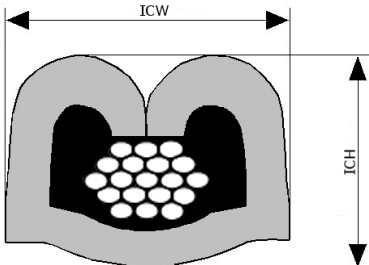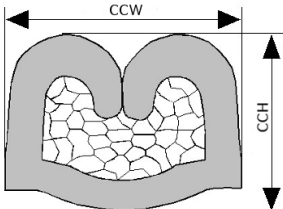

Terminal Part Number: 12084202
Surface Plating: AU
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50 | 0,51

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1009
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,30 - 2,60
Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,50 / 15324973		2,45	80	0,90	0,05	1,80	0,10	3,90	0,10	4,10	0,10
1009 0,51 / 15324973		2,45	80	0,90	0,05	1,80	0,10	3,90	0,10	4,10	0,10

Cable type code legend:

1009:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

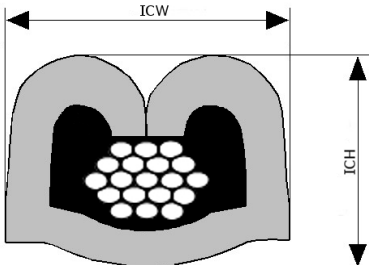

Terminal Part Number: 12084202
Surface Plating: AU
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50 | 0,51

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1009
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,30 - 2,60
Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 0,50 / 15324973		2,45	80	0,90	0,05	1,80	0,10	3,90	0,10	4,10	0,10
1009 0,51 / 15324973		2,45	80	0,90	0,05	1,80	0,10	3,90	0,10	4,10	0,10

Cable type code legend:

1009:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

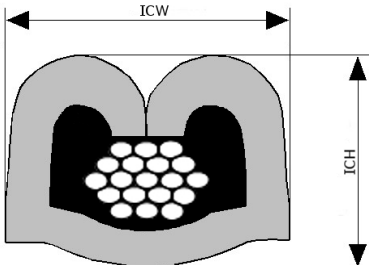

Terminal Part Number: 12084202
Surface Plating: AU
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,35

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1047
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,40 - 1,75
Seal(s): 15324974

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1047 0,35 / 15324974		1,58	70	0,85	0,05	1,80	0,10	3,70	0,10	4,10	0,10

Cable type code legend:

1047:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: THIN

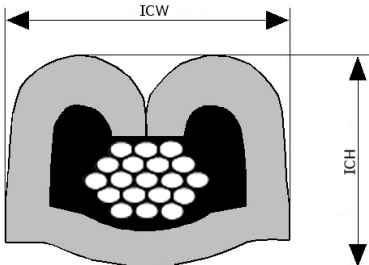

Terminal Part Number: 12084202
Surface Plating: AU
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,35

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1048
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,80 - 2,10
Seal(s): 15324976

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1048 0,35 / 15324976		1,95	70	0,85	0,05	1,80	0,10	3,80	0,10	4,10	0,10

Cable type code legend:

1048:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: REGULAR

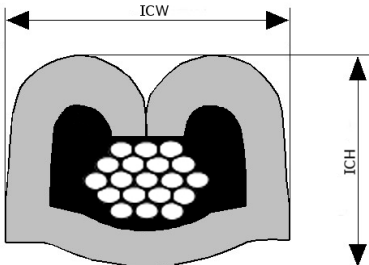

Terminal Part Number: 12084202
Surface Plating: AU
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,80

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1066
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 0,00 - 0,00
Seal(s): 12084193

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1066 0,80 / 12084193		0,00	90	1,05	0,05	1,85	0,10	3,60	0,10	3,90	0,10

Cable type code legend:

1066:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: NONE
Insul. Wall Designator: NONE

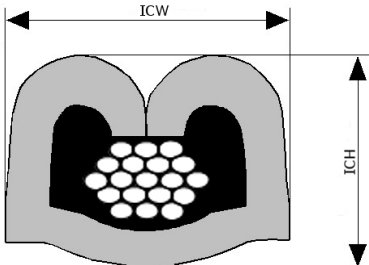

Terminal Part Number: 12084202
Surface Plating: AU
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 1094
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,35 - 2,50
Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 0,50 / 15324973		2,43	80	0,90	0,05	1,80	0,10	3,90	0,10	4,10	0,10

Cable type code legend:

1094:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: HEAVY DUTY

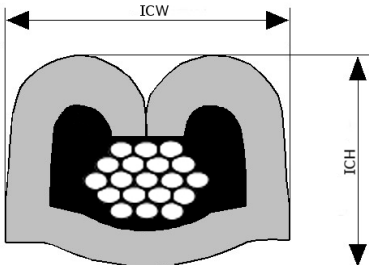

Terminal Part Number: 12084202
Surface Plating: AU
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1094
Crimp Process: (T) CRIMP ONLY - CORE IS DIP SOLDERED, THEN CRIMPED
Insulation Range Φ[mm]: 2,35 - 2,50
Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1094 0,50 / 15324973		2,43	80	0,90	0,05	1,80	0,10	3,90	0,10	4,10	0,10

Cable type code legend:

1094:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: HEAVY DUTY

