




- NOTES:
- MATERIALS AND FINISHES
BODY - BRASS, GOLD PLATING
CONTACT - BERYLLIUM COPPER, GOLD PLATING
INSULATOR - PTFE
 - ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC-2.6 GHz
 - MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE:-65°C TO +165°C
 - PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOLRF, 919-246J-51S AND DATE CODE"

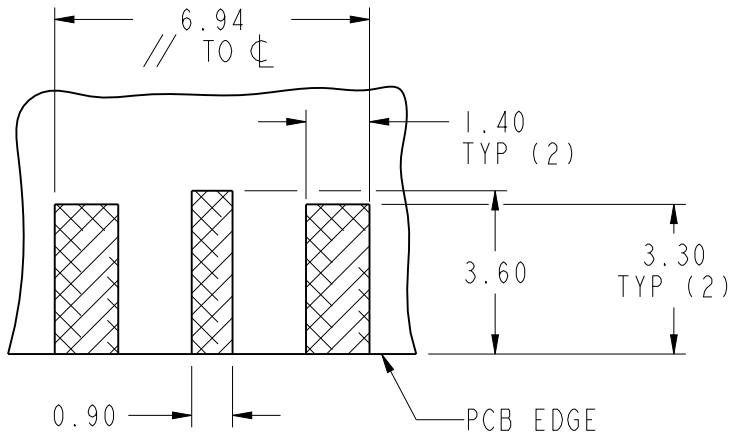


SCALE 6.000
RECOMMENDED PCB
DIMENSIONS

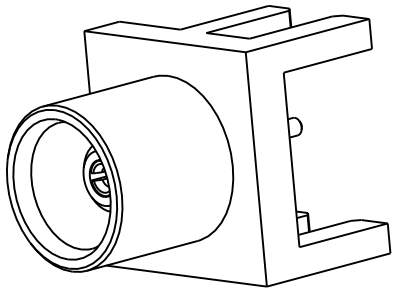

SCALE 5.000

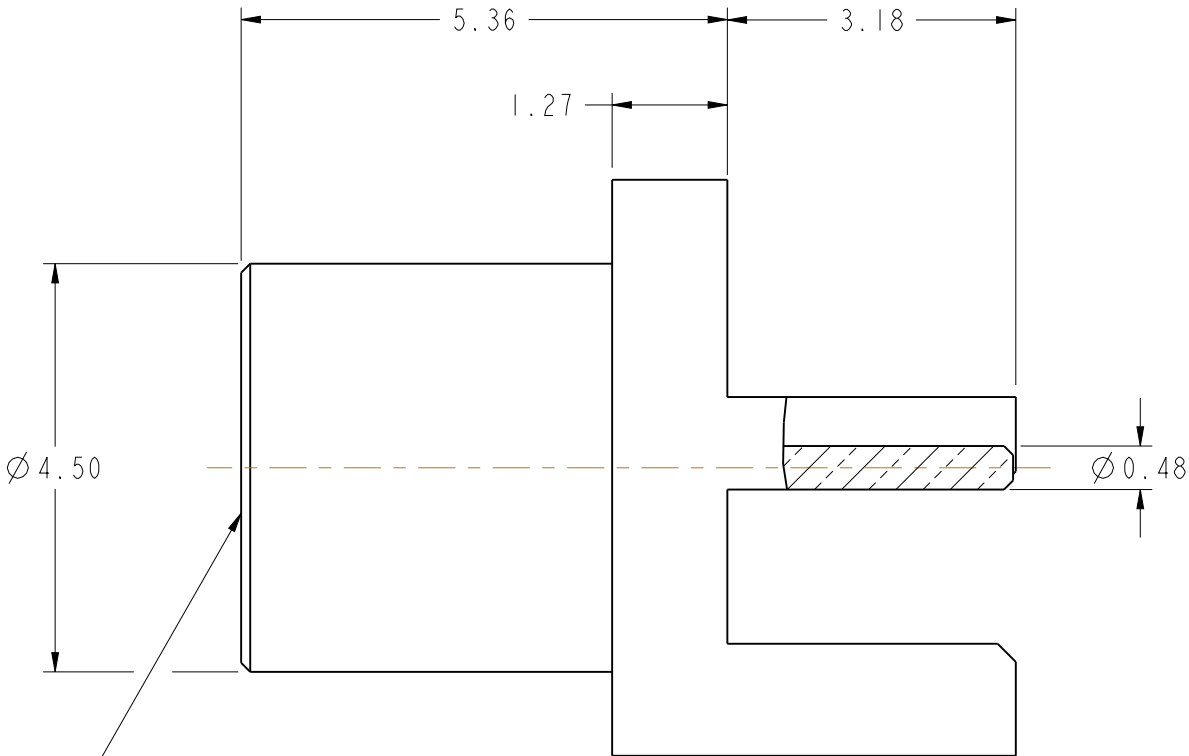

INTERFACE PER
CECC 22000
SERIES: MCX, JACK 50 OHM

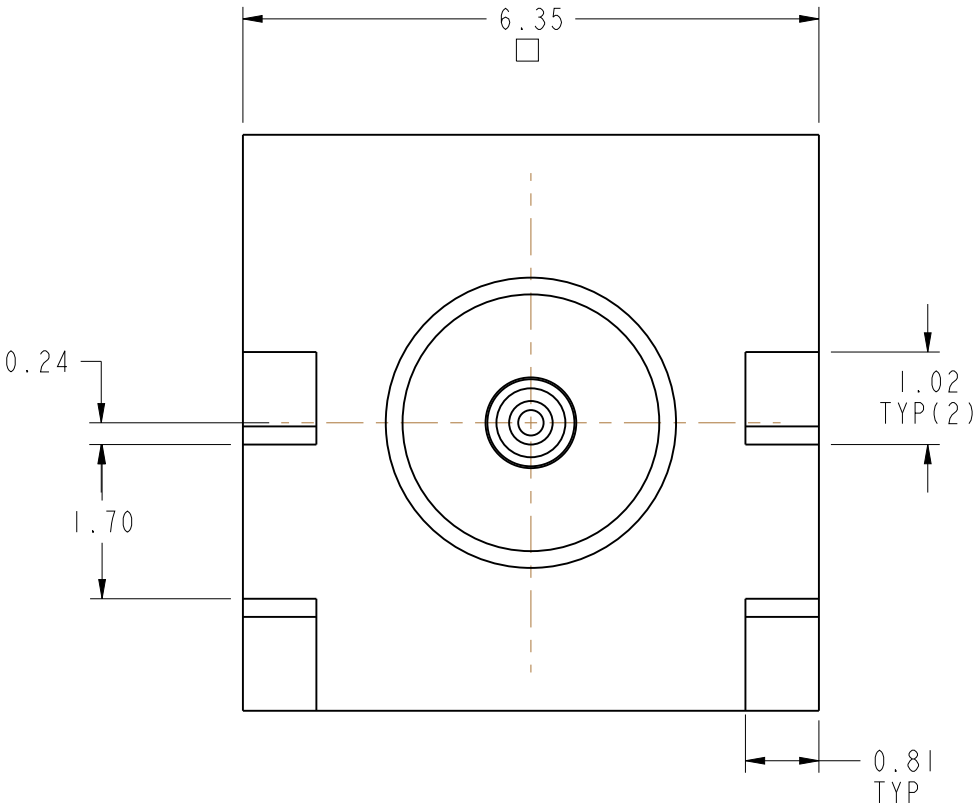

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other sperson to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN	DATE	TITLE ASSEMBLY MCX, JACK EDGE MOUNT	Amphenol RF www.amphenolrf.com
	SEE NOTES	KARTHIK R	22-Nov-10		
	REFERENCE EAR # 4445	ENGINEER KARTHIK R	DATE 22-Nov-10		
	CONFIGURATION LEVEL: In work	APPROVED K. CAPOZZI	DATE 1/28/11	SCALE: 12.0:1.0	SHEET 2 OF 2
	FINISH	CAD FILE		DWG SIZE B	REV A
				DRAWING NO.919-246J-51S	
				ITEM NO.MCX625100-013-3GT30G-50	
				PART NO.919-246J-51S	