

Terminal Part Number: 15493003

Surface Plating: AU

Material Thickness [mm]: -

Cross Section [mm²]: 1,00 | 1,50

Cable Type codes: 2010

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,80 - 2,40

Seal(s): 15339412 | 15470866

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 1,00 / 15339412		1,95	160	1,30	0,05	2,20	0,10	3,00	0,10	3,10	0,10
2010 1,50 / 15470866		2,20	200	1,45	0,05	2,20	0,10	3,20	0,10	3,15	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

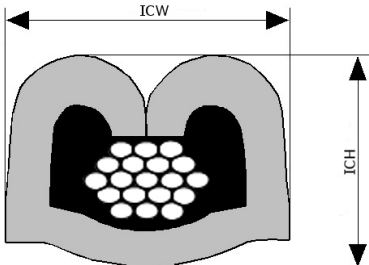

Terminal Part Number: 15493003

Surface Plating: AU

Material Thickness [mm]: -

Cross Section [mm²]: 1,00 | 1,50

Cable Type codes: 2053

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,75 - 2,25

Seal(s): 15470866 | 15339412

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2053 1,00 / 15339412		1,85	160	1,30	0,05	2,20	0,10	2,80	0,10	3,10	0,10
2053 1,50 / 15470866		2,18	200	1,45	0,05	2,20	0,10	2,90	0,10	3,15	0,10

Cable type code legend:

2053: PSA T2 ZH ID, PSA T3 ZH ID, PSA T4 ZH ID



Industry Designator: PSA

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: POLYOLEFIN, X-POLY

Insul. Wall Designator: ID

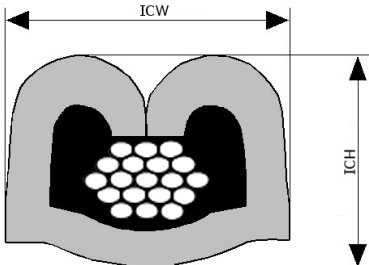

Terminal Part Number: 15493003

Surface Plating: AU

Material Thickness [mm]: -

Cross Section [mm²]: 1,00 | 1,50

Cable Type codes: 2054

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,99 - 2,40

Seal(s): 15339412 | 15470866

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2054 1,00 / 15339412		2,07	160	1,30	0,05	2,20	0,10	3,00	0,10	3,10	0,10
2054 1,50 / 15470866		2,25	200	1,40	0,05	2,20	0,10	3,20	0,10	3,15	0,10

Cable type code legend:

2054: PSA T2 IR, PSA T3 IR, PSA T3 ZH IR, PSA T4 LH IR

Industry Designator: PSA

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: POLYOLEFIN, PVC, X-POLY

Insul. Wall Designator: IR

