




**Part Number :** [428193213](#)  
**Product Description :** 10.00mm Pitch Mini-Fit Sr.  
Header, Single Row, Vertical, 1.57mm PCB Thickness,  
0.76µm Gold (Au) Selective Plating, 3 Circuits  
**Series Number :** 42819  
**Status :** Active  
**Product Category :** PCB Headers and Receptacles

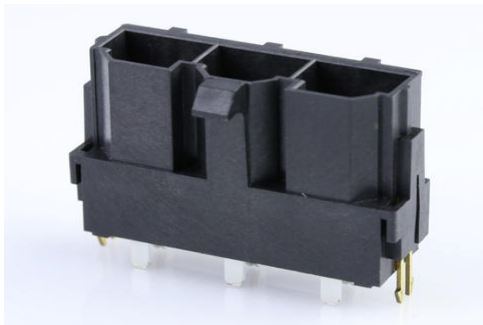

## Documents & Resources

### Drawings

[428193213 sd.pdf](#)  
[PK-42819-2375-001.pdf](#)

### 3D Models and Design Files

[STEP AP242](#)  
[SOLIDWORKS](#)  
[Creo](#)  
[Symbol and Footprint \(Multi-Format\)](#)

### Specifications

[PS-42815-001-001.pdf](#)

## Product Environment Compliance

### Compliance

|                    |                                                                                                           |
|--------------------|-----------------------------------------------------------------------------------------------------------|
| GADSL/IMDS         | Compliant with Exemption 44                                                                               |
| China RoHS         |  per SJ/T 11365-2006 |
| EU ELV             | Not Relevant                                                                                              |
| Low-Halogen Status | Not Low-Halogen per IEC 61249-2-21                                                                        |
| REACH SVHC         | Not Contained per D(2025)4165-DC (25 June 2025)                                                           |
| EU RoHS            | Compliant per EU 2015/863                                                                                 |

### [Compliance Statements](#)

- EU RoHS
- REACH SVHC
- Low-Halogen

#### Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

#### Substances of Interest

- PFAS

#### EU RoHS Certificate of Compliance

#### Additional Product Compliance Information

## Part Details

### General

|                |                                                                                                                               |
|----------------|-------------------------------------------------------------------------------------------------------------------------------|
| Status         | Active                                                                                                                        |
| Category       | PCB Headers and Receptacles                                                                                                   |
| Series         | 42819                                                                                                                         |
| Description    | 10.00mm Pitch Mini-Fit Sr. Header, Single Row, Vertical, 1.57mm PCB Thickness, 0.76µm Gold (Au) Selective Plating, 3 Circuits |
| Application    | Power, Wire-to-Board                                                                                                          |
| Component Type | PCB Header                                                                                                                    |
| Product Name   | Mini-Fit Sr.                                                                                                                  |
| UPC            | 800756513454                                                                                                                  |

### Agency

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

### Electrical

|                               |       |
|-------------------------------|-------|
| Current - Maximum per Contact | 50.0A |
| Voltage - Maximum             | 600V  |

### Physical

|                                |                                |
|--------------------------------|--------------------------------|
| Breakaway                      | No                             |
| Circuits (Loaded)              | 3                              |
| Circuits (maximum)             | 3                              |
| Color - Resin                  | Black                          |
| Durability (mating cycles max) | 100                            |
| First Mate / Last Break        | No                             |
| Flammability                   | 94V-0                          |
| Glow-Wire Capable              | No                             |
| Guide to Mating Part           | No                             |
| Keying to Mating Part          | None                           |
| Lock to Mating Part            | Yes                            |
| Material - Metal               | Brass                          |
| Material - Plating Mating      | Gold                           |
| Material - Plating Termination | Tin                            |
| Material - Resin               | High Temperature Thermoplastic |
| Net Weight                     | 7.363/g                        |
| Number of Rows                 | 1                              |
| Orientation                    | Vertical                       |
| Packaging Type                 | Tray                           |
| PCB Locator                    | Yes                            |
| PCB Retention                  | Yes                            |
| PCB Thickness - Recommended    | 1.57mm                         |
| PC Tail Length                 | 3.50mm                         |
| Pitch - Mating Interface       | 10.00mm                        |
| Pitch - Termination Interface  | 10.00mm                        |
| Plating min - Mating           | 0.762µm                        |
| Plating min - Termination      | 2.540µm                        |
| Polarized to Mating Part       | Yes                            |
| Polarized to PCB               | Yes                            |
| Shrouded                       | Fully                          |
| Stackable                      | No                             |
| Temperature Range - Operating  | -40° to +105°C                 |
| Termination Interface Style    | Through Hole                   |

## Solder Process Data

|                              |          |
|------------------------------|----------|
| Max-Duration                 | 30       |
| Lead-Free Process Capability | SMC&WAVE |
| Max-Cycle                    | 3        |
| Max-Temp                     | 235      |

---

## Mates With / Use With

### Mates with Part(s)

| Description                                                                                                                 | Part Number                      |
|-----------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Mini-Fit Sr.-to-Mini-Fit Sr. Off-the-Shelf (OTS) Cable Assembly, 10.00mm Pitch, Single Row, 0.15m Length, 3 Circuits, Black | <u><a href="#">369240301</a></u> |
| Mini-Fit Sr.-to-Mini-Fit Sr. Off-the-Shelf (OTS) Cable Assembly, 10.00mm Pitch, Single Row, 0.30m Length, 3 Circuits, Black | <u><a href="#">369240303</a></u> |
| Mini-Fit Sr.-to-Mini-Fit Sr. Off-the-Shelf (OTS) Cable Assembly, 10.00mm Pitch, Single Row, 1.0m Length, 3 Circuits, Black  | <u><a href="#">369240310</a></u> |
| 10.00mm Pitch Mini-Fit Sr. Single Row Receptacle Housings                                                                   | <u><a href="#">42816</a></u>     |

---

This document was generated on Sep 25, 2025