




**Part Number :** [1733590002](#)

**Product Description :** zCD (CDFP) Short Body Connector Assembly, 16X, 120 Circuits, 0.75mm Pitch, Gold (Au) Over Nickel Plated

**Series Number :** 173359

**Status :** Active

**Product Category :** High-Speed I/O Connectors

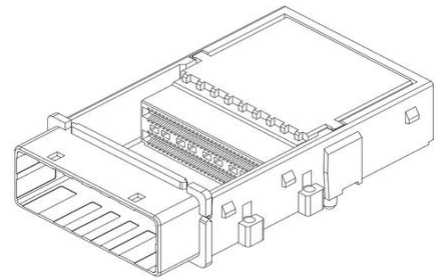

---

## Documents and Resources

### Drawings

[1733590002\\_sd.pdf](#)

### 3D Models and Design Files

[STEP AP242](#)

[SOLIDWORKS](#)

[Creo](#)

### Specifications

[AS-173359-0001-001.pdf](#)

[AS-173359-0002-001.pdf](#)

[PK-170834-0001-001.pdf](#)

[PS-173359-0001-001.pdf](#)

### Tooling Specifications


[ATS-622030700-001.pdf](#)

[ATS-622030750-001.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	 per SJ/T 11365-2006
EU ELV	Compliant per 2000/53/EC
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Contains Lead; Cadmium per

	D(2025)7771-DC (04 Feb 2026)
EU RoHS	Compliant per EU 2015/863

### Compliance Statements

- EU RoHS
- REACH SVHC
- Low-Halogen

### Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

### Substances of Interest

- PFAS

### EU RoHS Certificate of Compliance

### Additional Product Compliance Information

## Part Details

### General

Status	Active
Category	High-Speed I/O Connectors
Series	173359
Description	zCD (CDFP) Short Body Connector Assembly, 16X, 120 Circuits, 0.75mm Pitch, Gold (Au) Over Nickel Plated
Application	Wire-to-Board
Component Type	Receptacle
Product Name	CDFP,zCD
Type	Pluggable
UPC	889056590761

### Agency

UL	E29179
----	--------

### Electrical

Current - Maximum per Contact	1.0A
Data Rate	28.0 Gbps
Grounding to Panel	Bezel
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

## Physical

Circuits (Loaded)	120
Color - Resin	Black
Durability (mating cycles max)	50
Gender	Female
Keying to Mating Part	No
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	33.289/g
Number of Rows	4
Orientation	Right Angle
Packaging Type	Tray
Panel Mount	Yes
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.57mm
Pitch - Mating Interface	0.75mm
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	1
Temperature Range - Operating	-40° to +85°C
Termination Interface Style	Through Hole - Compliant Pin

---

## Mates With / Use With

## Mates with Part(s)

Description	Part Number
zCD-to-zCD (CDFP-to-CDFP) Cable Assemblies	<u>201069</u>

---

## Application Tooling

---

This document was generated on Apr 29, 2026