


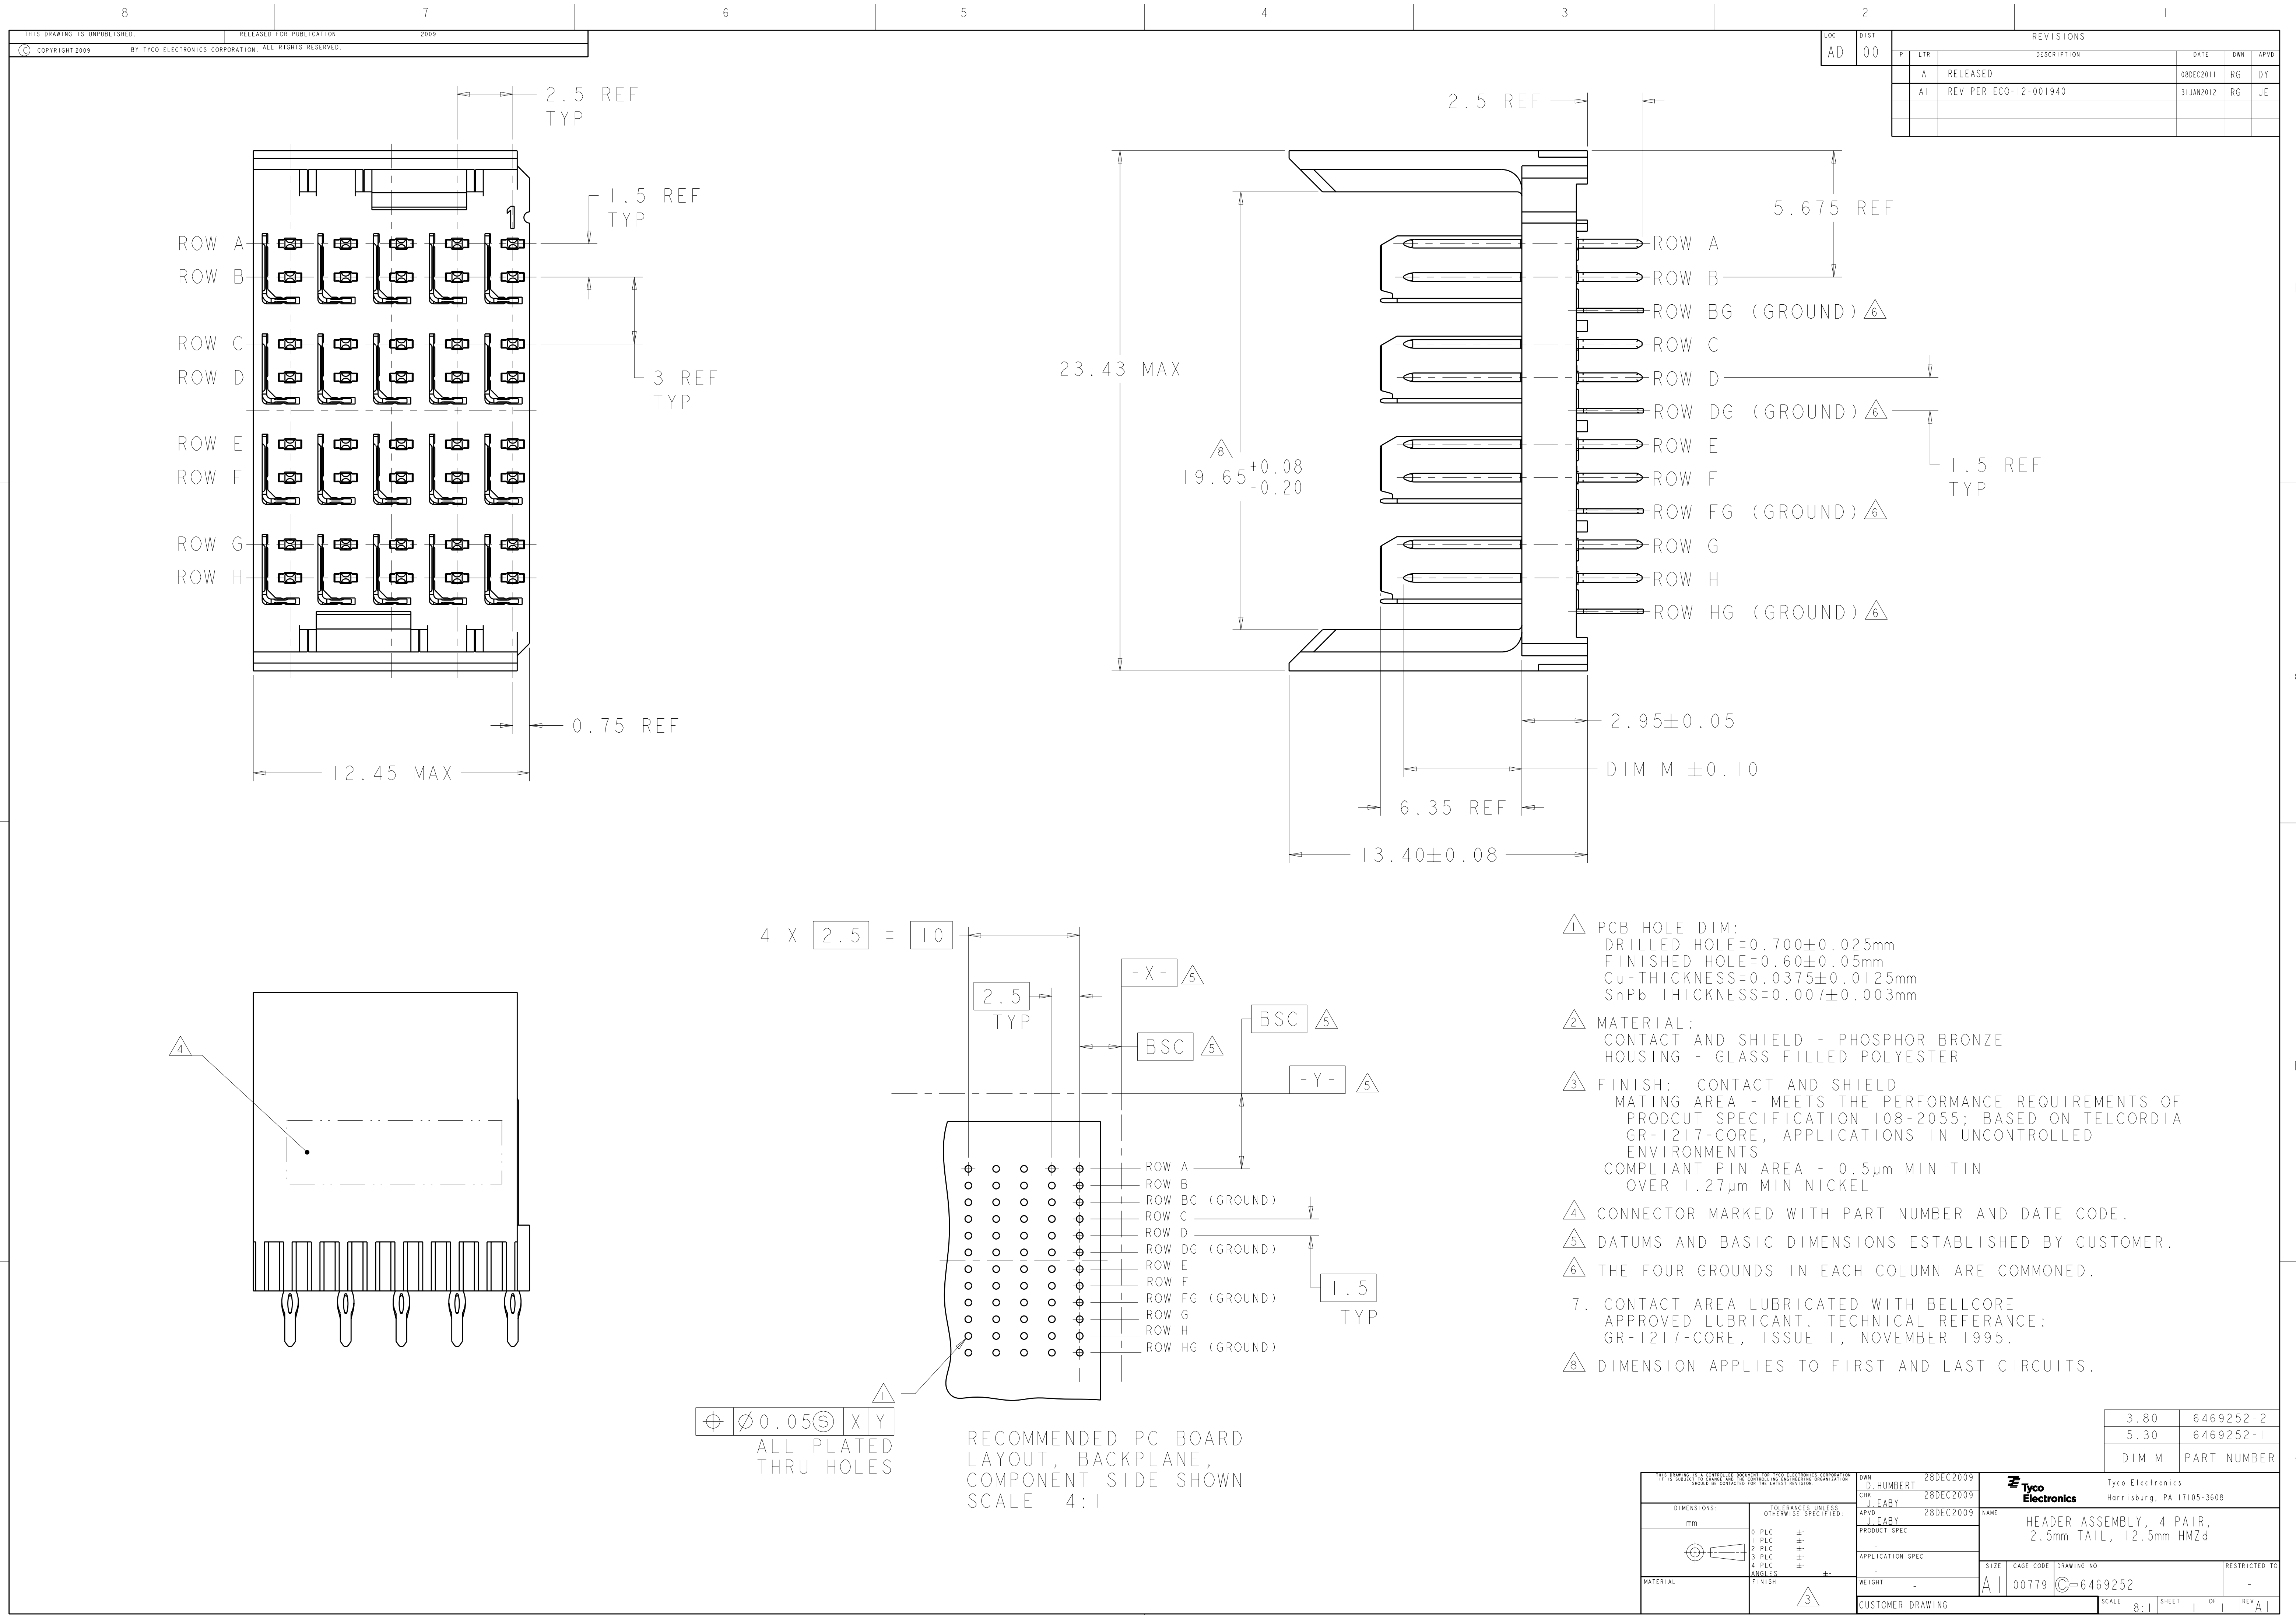

LOC		DIST		REVISONS			
AD	00	F	LYR	DESCRIPTION	DATE	DWN	APVD
			A	RELEASED	08DEC2011	RG	DY
			A1	REV PER ECO-12-001940	31JAN2012	RG	JE

- 1 PCB HOLE DIM:
DRILLED HOLE=0.700±0.025mm
FINISHED HOLE=0.60±0.05mm
Cu-THICKNESS=0.0375±0.0125mm
SnPb THICKNESS=0.007±0.003mm
- 2 MATERIAL:
CONTACT AND SHIELD - PHOSPHOR BRONZE
HOUSING - GLASS FILLED POLYESTER
- 3 FINISH: CONTACT AND SHIELD
MATING AREA - MEETS THE PERFORMANCE REQUIREMENTS OF
PRODCUT SPECIFICATION 108-2055; BASED ON TELCORDIA
GR-1217-CORE, APPLICATIONS IN UNCONTROLLED
ENVIRONMENTS
COMPLIANT PIN AREA - 0.5µm MIN TIN
OVER 1.27µm MIN NICKEL
- 4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
- 5 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6 THE FOUR GROUNDS IN EACH COLUMN ARE COMMONED.
- 7. CONTACT AREA LUBRICATED WITH BELLCORE
APPROVED LUBRICANT. TECHNICAL REFERENCE:
GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 8 DIMENSION APPLIES TO FIRST AND LAST CIRCUITS.

3.80	6469252-2
5.30	6469252-1
DIM M	PART NUMBER

TYCO ELECTRONICS CORPORATION 1111 S. MARKET STREET, SUITE 100, HARRISBURG, PA 17105-3608 TEL: 717-651-1000 FAX: 717-651-1001 WWW.TYCOELECTRONICS.COM		DWN D. HUMBERT 28DEC2009	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK J. EARY 28DEC2009	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. EARY 28DEC2009	PRODUCT SPEC	
0 PLC ±			APPLICATION SPEC	
1 PLC ±			WEIGHT	
2 PLC ±			CUSTOMER DRAWING	
3 PLC ±			SCALE 8:1	
4 PLC ±			SHEET 1 OF 1	
ANGLES			REV A1	
FINISH				