THIS DRAWING AND THE INFORMATION SET FORTH HERE-ON ARE THE PROPERTY OF TYCO ELECTRONICS CORPORATION, AND ARE TO BE HELD IN TRUST AND CONFIDENCE. PUBLICATION, DUPLICATION, DISCLOSURE, OR USE FOR ANY PURPOSE NOT EXPRESSLY AUTHORIZED IN WRITING BY TYCO ELECTRONICS CORPORATION IS PROHIBITED.

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
1	PRE PRODUCTION RELEASE ECN T-4500	11/22/83	J.B.
A	PER ECO-09-025648	Nov/16/09	M.HIGGY

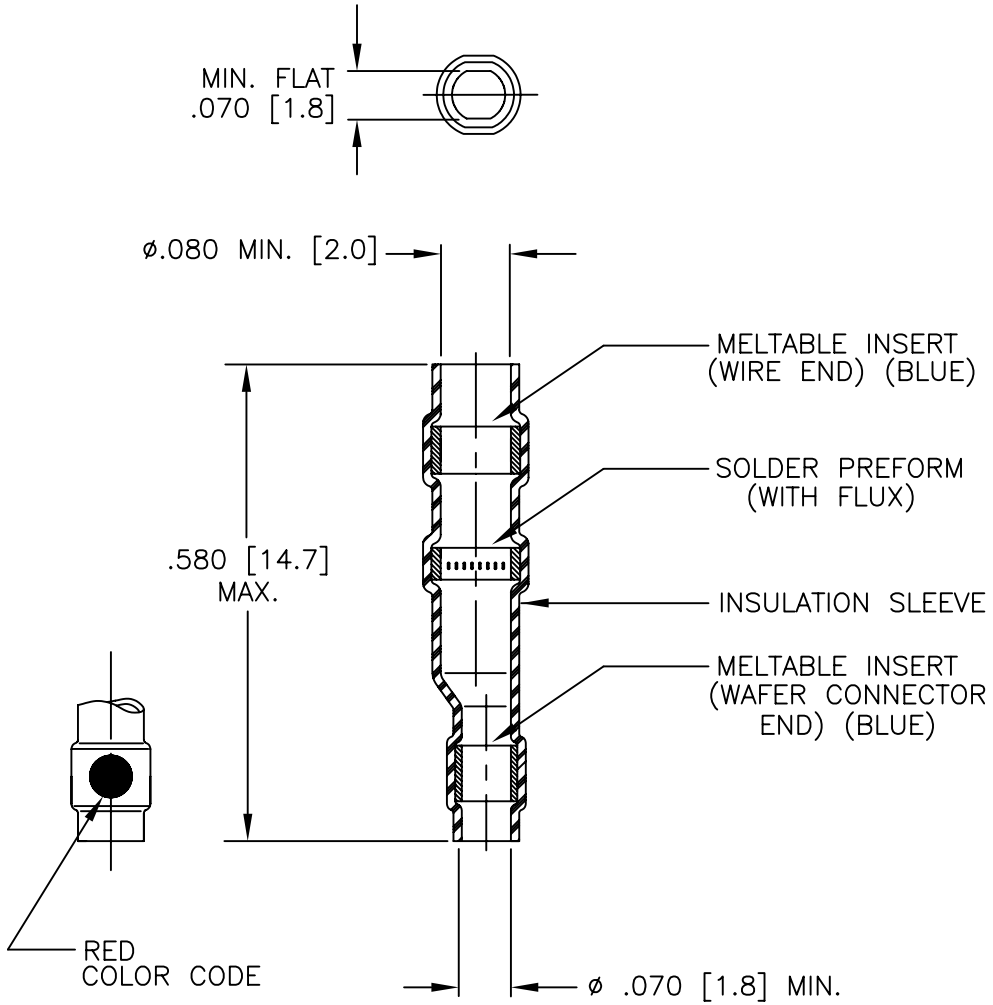

NOTES:

1. MATERIALS:
   - A. INSULATION SLEEVE: HEAT SHRINKABLE, RADIATION CROSSLINKED MODIFIED POLYVINYLIDENE FLUORIDE, TRANSPARENT BLUE.
   - B. SOLDER PREFORM: SOLDER TYPE: Sn96 FLUX TYPE: RA PER ANSI-J-STD-006.
   - C. MELTABLE INSERTS: LOW OUTGASSING IMMERSION RESISTANT THERMOPLASTIC.
   - D. CARRIER STRIP: ADHESIVE COATED HIGH TEMPERATURE TAPE.
2. THESE SLEEVES ARE DESIGNED TO ATTACH 20 THROUGH 26 GAGE TIN, NICKEL OR SILVER PLATED CONDUCTORS TO TERMINALS OF A TE MTC100 SERIES WAFER.

SHEET 1
DWG NO. CTA-0065

©2009 Tyco Electronics Corporation. All rights reserved.

CUSTOMER DRAWING

If this document is printed it becomes uncontrolled. Check for the latest revision

Ⓡ Trademark of Tyco Electronics Corporation.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS.
DECIMALS
.XXX ± N/A { mm
.XX ± { mm
ANGLES
.X ±
WEIGHT:

DRAWN	Zsofia O.	Nov/10/09
CHECKED		
APPROVED	M. HIGGY	Nov/10/09
APPROVED		
CAD NAME	CTA-0065	
THIRD ANGLE PROJECTION		

Tyco Electronics

Raychem Interconnect
300 Constitution Drive
Menlo Park, CA 94025 U.S.A

TITLE
SOLDERSLEEVE Ⓡ WIRE TERMINATOR WITH OVAL ENTRY TEMPERATURE RATING 150 CELSIUS DEGREE, Sn96 MTC100 SERIES

SIZE	CAGE CODE:	DWG. NO.	REV
B	06090	CTA-0065	A
SCALE: NONE		SHEET 1 OF 1	

Downloaded from Arrow.com.