

Toroidal Suppression Core (2631801202)

Part Number: 2631801202

31 Toroidal Suppression Core

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 2 = Burnished (All cable cores have been burnished to remove the sharp edges)

Fair-Rite offers a broad selection of ferrite EMI suppression cable cores in several materials with guaranteed minimum impedance specifications.

For smaller suppression parts, refer to the section EMI Suppression Beads.

Our Expanded Cable and Suppressor Kit (part number 0199000005) contains a selection of these suppression cores.

For any cable suppression core not listed here, feel free to contact our customer service group for availability and pricing.

The C dimension, the core length, can be modified to suit specific applications.

Weight: 25 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	29	±0.75	1.142	—
B	19	±0.50	0.748	—
C	13.85	±0.40	0.545	—



Chart Legend

+ Test frequency

Typical Impedance (Ω)	
1 MHz	11.5


Typical Impedance (Ω)	
5 MHz	29
10 MHz ⁺	36
25 MHz ⁺	52
100 MHz ⁺	83
250 MHz	105


Electrical Properties	
H(Oe)	0.17

Suppression cable cores are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Single turn impedance tests for 31[®] , 43[®] and 46 material cores are performed on the E4991A/HP4291B Impedance Analyzer. The 61 material parts are tested on the E4991A / HP4291B Impedance Analyzer and 75 material parts are tested on the E4990A Impedance Analyzer. Cores are tested with the shortest practical wire length.

Typical Impedance (Ω)	
1 MHz	10
5 MHz	24
10 MHz ⁺	31
25 MHz ⁺	49
100 MHz ⁺	88
250 MHz	130

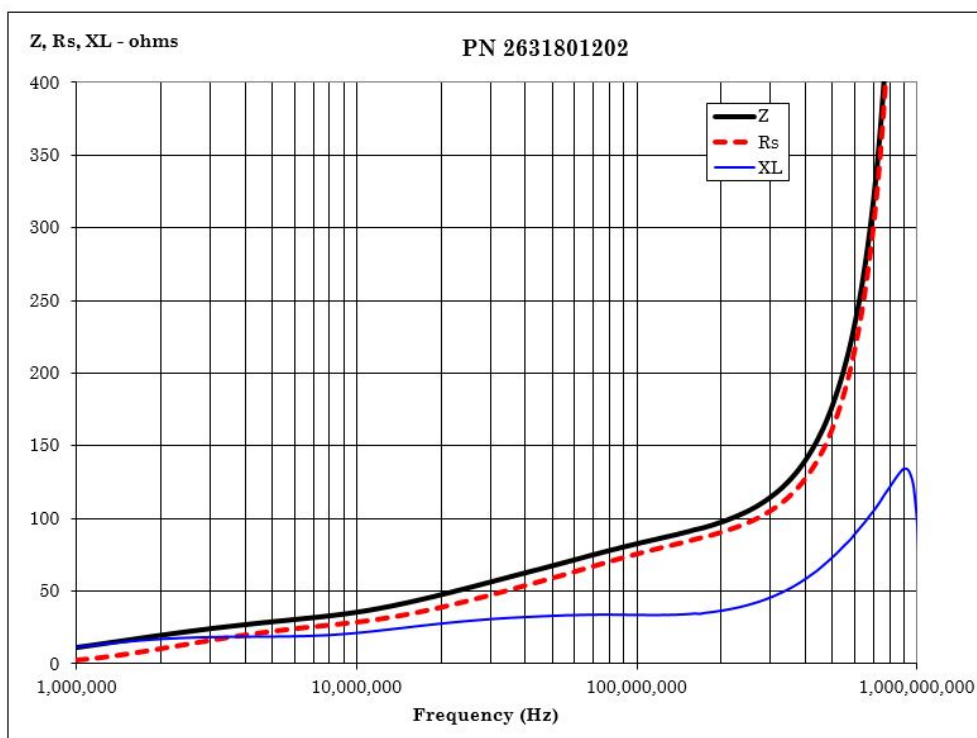

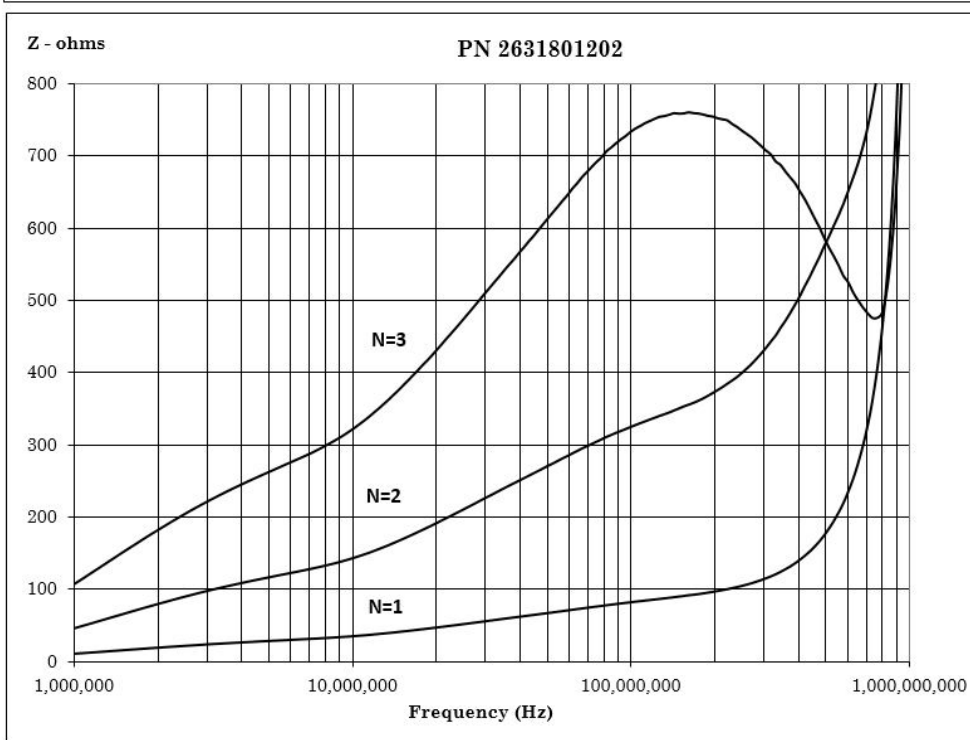

[CSV Download](#)

Fair-Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288

888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • ferrites@fair-rite.com • www.fair-rite.com