

Polypropylene (PP) Capacitors for Pulse Applications with Double-Sided Metallized Electrodes in PCM 7.5 mm to 52.5 mm. Capacitances from 1000 pF to 47 μ F. Rated Voltages from 100 VDC to 3000 VDC.

Special Features

- Pulse duty construction
- Self-healing
- Very low dissipation factor
- Negative capacitance change versus temperature
- AEC-Q200 qualified
- According to RoHS 2015/863/EU

Typical Applications

For pulse applications e.g.

- Switch mode power supplies
- TV and monitor sets
- Lighting
- Audio/video equipment


Construction

Dielectric: Polypropylene (PP) film

Capacitor electrodes:

Double-sided metallized plastic film

Internal construction:

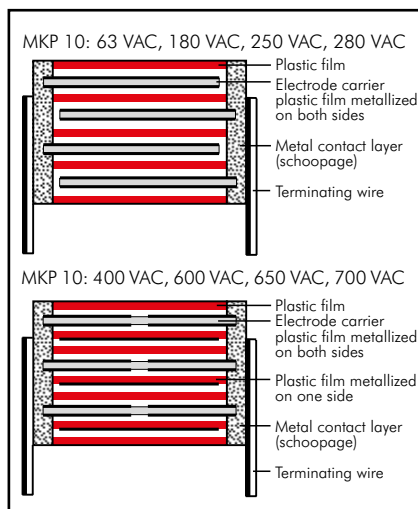

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations: Tinned wire.

Marking: Colour: Red.

Marking: Black.

Electrical Data

Capacitance range:

1000 pF to 47 μ F

Rated voltages: 100VDC, 250VDC, 400VDC, 630VDC, 850VDC, 1000VDC, 1600VDC, 2000VDC, 2500VDC, 3000 VDC

Capacitance tolerances:

$\pm 20\%$, $\pm 10\%$, $\pm 5\%$

Operating temperature range:

-55°C to $+105^{\circ}\text{C}$

Insulation resistance at $+20^{\circ}\text{C}$:

$C \leq 0.33 \mu\text{F}$: $\geq 1 \times 10^5 \text{ M}\Omega$

$C > 0.33 \mu\text{F}$: $\geq 30000 \text{ sec (M}\Omega \times \mu\text{F)}$

Measuring voltage: 100 V/1 min.

Test voltage: 2 sec.

L	$\leq 2000\text{VDC}$	2500VDC	$\geq 3000\text{VDC}$
< 41.5	$1.6 U_r$	$1.4 U_r$	$1.2 U_r$
41.5	$1.4 U_r$	$1.4 U_r$	$1.2 U_r$
57	$1.2 U_r$	$1.2 U_r$	$1.2 U_r$

Climatic test category:

55/100/56 in accordance with IEC

Dielectric absorption: 0.05 %

Voltage derating:

A voltage derating factor of 1.35 % per K must be applied from $+85^{\circ}\text{C}$ for DC voltages and from $+75^{\circ}\text{C}$ for AC voltages.

Reliability:

Operational life > 300000 hours

Failure rate $< 1 \text{ fit}$ ($0.5 \times U_r$ and 40°C)

Specific dissipation:

Box size* WxHxL in mm	Specific dissipation in Watts per K above the ambient temperature
35 x 50 x 57	0.132
45 x 55 x 57	0.164
45 x 65 x 57	0.184

* other box sizes see page 10.

Dissipation factors at $+20^{\circ}\text{C}$: $\tan \delta$

at f	$C \leq 0.1 \mu\text{F}$	$0.1 \mu\text{F} < C \leq 1.0 \mu\text{F}$	$C > 1.0 \mu\text{F}$
1 kHz	$\leq 6 \times 10^{-4}$	$\leq 6 \times 10^{-4}$	$\leq 6 \times 10^{-4}$
10 kHz	$\leq 6 \times 10^{-4}$	$\leq 6 \times 10^{-4}$	—
100 kHz	$\leq 15 \times 10^{-4}$	—	—

Maximum pulse rise time:

Capacitance pF/ μF	max. pulse rise time V/ μsec at $T_A < 40^{\circ}\text{C}$									
	100VDC	250VDC	400VDC	630VDC	850VDC	1000VDC	1600VDC	2000VDC	2500VDC	3000VDC
1000 ... 2200	1250	2300	2300	2300	3500	3500	7000	11500	11500	—
3300 ... 6800	1150	1500	1500	1500	3500	3500	7000	11500	11500	—
0.01 ... 0.022	900	1400	1500	1500	2700	2700	3800	4400	11500	—
0.033 ... 0.068	500	1000	1150	1400	2700	2700	2700	2700	2700	2700
0.1 ... 0.22	250	650	650	1150	1800	1800	1800	1800	1800	1800
0.33 ... 0.68	130	390	500	900	1150	1150	1150	1150	1150	1150
1.0 ... 2.2	90	250	250	500	500	500	650	650	650	500
3.3 ... 4.7	65	100	130	190	230	230	330	—	—	—
6.8 ... 15	45	65	90	160	—	—	—	—	—	—
22 ... 47	30	45	45	—	—	—	—	—	—	—

Mechanical Tests

Pull test on pins:

$d \leq 0.8 \text{ mm}$: 10 N in direction of pins

$d > 0.8 \text{ mm}$: 20 N in direction of pins

according to IEC 60068-2-21

Vibration: 6 hours at 10 ... 2000 Hz and 0.75 mm displacement amplitude or 10 g in accordance with IEC 60068-2-6

Low air density: 1 kPa = 10 mbar in accordance with IEC 60068-2-13

Bump test: 4000 bumps at 390 m/sec² in accordance with IEC 60068-2-29

Packing

Available taped and reeled up to and including case size 15 x 26 x 31.5 / PCM 27.5 mm.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

Continuation

General Data

Capacitance	100 VDC/63 VAC					250 VDC/180 VAC				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 μ F	4	9	10	7.5	MKP1D021002C-----	4	9	10	7.5	MKP1F021002C-----
0.015 "	4	9	10	7.5	MKP1D021502C-----	4	9	13	10	MKP1F021003C-----
0.022 "	4	9	10	7.5	MKP1D022202C-----	4	9	10	7.5	MKP1F021502C-----
0.033 "	4	9	10	7.5	MKP1D022202C-----	4	9	13	10	MKP1F021503C-----
0.033 "	5	10.5	10.3	7.5	MKP1D023302E-----	4	9	10	7.5	MKP1F022202C-----
0.047 "	4	9	13	10	MKP1D023303C-----	4	9	13	10	MKP1F022203C-----
0.047 "	5	10.5	10.3	7.5	MKP1D024702E-----	5	10.5	10.3	7.5	MKP1F023302E-----
0.068 "	4	9	13	10	MKP1D024703C-----	4	9	13	10	MKP1F023303C-----
0.068 "	5	11	13	10	MKP1D026803F-----	5	10.5	10.3	7.5	MKP1F024702E-----
0.1 μ F	6	12	13	10	MKP1D031003G-----	4	9	13	10	MKP1F024703C-----
0.12 "	6	12.5	18	15	MKP1D031204C-----	5	11	13	10	MKP1F026803F-----
0.15 "	6	12.5	18	15	MKP1D031504C-----	5	11	18	15	MKP1F026804B-----
0.18 "	7	14	18	15	MKP1D031804D-----	6	12.5	18	15	MKP1F031003G-----
0.22 "	7	14	18	15	MKP1D032204D-----	6	12.5	18	15	MKP1F031004B-----
0.27 "	8	15	18	15	MKP1D032704F-----	6	15	26.5	22.5	MKP1F031204C-----
0.33 "	8	15	18	15	MKP1D033304F-----	6	15	26.5	22.5	MKP1F031504C-----
0.39 "	9	16	18	15	MKP1D033904J-----	6	15	26.5	22.5	MKP1F031505B-----
0.47 "	9	16	18	15	MKP1D034704J-----	7	14	18	15	MKP1F031804D-----
0.56 "	7	16.5	26.5	22.5	MKP1D034705D-----	7	14	18	15	MKP1F032204D-----
0.68 "	8.5	18.5	26.5	22.5	MKP1D035605F-----	6	15	26.5	22.5	MKP1F032205B-----
0.82 "	8.5	18.5	26.5	22.5	MKP1D036805F-----	8	15	18	15	MKP1F032704F-----
1.0 μ F	10.5	19	26.5	22.5	MKP1D038205G-----	8	15	18	15	MKP1F033304F-----
1.2 "	11	21	31.5	27.5	MKP1D041005G-----	6	15	26.5	22.5	MKP1F033305B-----
1.5 "	11	21	31.5	27.5	MKP1D041206B-----	9	16	18	15	MKP1F033904J-----
1.8 "	13	24	31.5	27.5	MKP1D041506B-----	9	16	18	15	MKP1F034704J-----
2.2 "	13	24	31.5	27.5	MKP1D042206D-----	7	16.5	26.5	22.5	MKP1F034705D-----
2.7 "	17	29	31.5	27.5	MKP1D042706G-----	8.5	18.5	26.5	22.5	MKP1F035605F-----
3.3 "	17	29	31.5	27.5	MKP1D043306G-----	8.5	18.5	26.5	22.5	MKP1F036805F-----
3.9 "	20	39.5	31.5	27.5	MKP1D043906J-----	9	19	31.5	27.5	MKP1F036806A-----
4.7 "	20	39.5	31.5	27.5	MKP1D044706J-----	11	21	26.5	22.5	MKP1F038205I-----
5.6 "	17	29	41.5	37.5	MKP1D044707E-----	11	21	31.5	27.5	MKP1F041005L-----
6.8 "	19	32	41.5	37.5	MKP1D045607F-----	13	24	31.5	27.5	MKP1F041006B-----
8.2 "	19	32	41.5	37.5	MKP1D046807F-----	13	24	31.5	27.5	MKP1F041206D-----
	20	39.5	41.5	37.5	MKP1D048207G-----	15	26	31.5	27.5	MKP1F041506D-----
						15	26	31.5	27.5	MKP1F041806F-----
						13	24	41.5	37.5	MKP1F042206F-----
						17	34.5	31.5	27.5	MKP1F042207C-----
						17	34.5	31.5	27.5	MKP1F042706I-----
						17	34.5	31.5	27.5	MKP1F043306I-----
						17	29	41.5	37.5	MKP1F043307E-----
						20	39.5	31.5	27.5	MKP1F043906J-----
						20	39.5	31.5	27.5	MKP1F044706J-----
						19	32	41.5	37.5	MKP1F044707F-----
						20	39.5	41.5	37.5	MKP1F045607F-----
						20	39.5	41.5	37.5	MKP1F045607G-----
						20	39.5	41.5	37.5	MKP1F046807G-----
						24	45.5	41.5	37.5	MKP1F048207H-----

* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_{\text{r}}$

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:

Version code: 2-pin = 00
4-pin = D4
Tolerance: 20 % = M
10 % = K
5 % = J
Packing: bulk = S
Pin length: 6-2 = SD

Taped version see page 133.

Rights reserved to amend design data without prior notification.

Continuation

General Data

Capacitance	100 VDC/63 VAC*					250 VDC/180 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
10 μ F	20	39.5	41.5	37.5	MKP1D051007G	24	45.5	41.5	37.5	MKP1F051007H
12 "	24	45.5	41.5	37.5	MKP1D051207H	28	38	41.5	37.5	MKP1F051007L
15 "	24	45.5	41.5	37.5	MKP1D051507H	35	50	41.5	37.5	MKP1F051207J
18 "	28	38	41.5	37.5	MKP1D051507L	35	50	41.5	37.5	MKP1F051507J
22 "	35	50	41.5	37.5	MKP1D051807J	35	50	57	52.5	MKP1F051509F
27 "	35	50	41.5	37.5	MKP1D052207J	35	50	57	52.5	MKP1F051809F
33 "	40	55	41.5	37.5	MKP1D052707K	35	50	57	52.5	MKP1F052209F
39 "	40	55	41.5	37.5	MKP1D053307K	45	65	57	52.5	MKP1F052709J
47 "	35	50	57	52.5	MKP1D053309F	45	65	57	52.5	MKP1F053309J
	45	65	57	52.5	MKP1D053909J					
	45	65	57	52.5	MKP1D054709J					

Capacitance	400 VDC/250 VAC*					630 VDC/400 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	4	9	10	7.5	MKP1G011002C	4	9	10	7.5*	MKP1J011002C
1200 "	4	9	10	7.5	MKP1G011202C	4	9	10	7.5*	MKP1J011202C
1500 "	4	9	10	7.5	MKP1G011502C	4	9	10	7.5*	MKP1J011502C
1800 "	4	9	10	7.5	MKP1G011802C	4	9	10	7.5*	MKP1J011802C
2200 "	4	9	10	7.5	MKP1G012202C	4	9	10	7.5*	MKP1J012202C
2700 "	4	9	10	7.5	MKP1G012702C	4	9	10	7.5*	MKP1J012702C
3300 "	4	9	10	7.5	MKP1G013302C	4	9	10	7.5*	MKP1J013302C
3900 "	4	9	10	7.5	MKP1G013902C	4	9	10	7.5*	MKP1J013902C
4700 "	4	9	10	7.5	MKP1G014702C	4	9	10	7.5*	MKP1J014702C
5600 "	4	9	10	7.5	MKP1G015602C	4	9	10	7.5*	MKP1J015602C
6800 "	4	9	10	7.5	MKP1G016802C	4	9	10	7.5*	MKP1J016802C
8200 "	4	9	10	7.5	MKP1G018202C	4	9	13	10	MKP1J016803C
						5	10.5	10.3	7.5*	MKP1J018202E
0.01 μ F	4	9	10	7.5	MKP1G021002C	5	10.5	10.3	7.5*	MKP1J021002E
	4	9	13	10	MKP1G021003C	4	9	13	10	MKP1J021003C
0.012 "	5	10.5	10.3	7.5	MKP1G021202E	5	11	13	10	MKP1J021203F
0.015 "	5	10.5	10.3	7.5	MKP1G021502E	5	11	13	10	MKP1J021503F
	4	9	13	10	MKP1G021503C	5	11	18	15	MKP1J021504B
0.018 "	5	10.5	10.3	7.5	MKP1G021802E	5	11	13	10	MKP1J021803F
0.022 "	5	10.5	10.3	7.5	MKP1G022202E	5	11	13	10	MKP1J022203F
	4	9	13	10	MKP1G022203C	5	11	18	15	MKP1J022204B
0.027 "	5.7	12.5	10.3	7.5	MKP1G022702F	6	12	13	10	MKP1J022703G
0.033 "	5.7	12.5	10.3	7.5	MKP1G023302F	6	12	13	10	MKP1J023303G
	5	11	13	10	MKP1G023303F	5	11	18	15	MKP1J023304B
0.039 "	6	12	13	10	MKP1G023903G	6	12.5	18	15	MKP1J023904C
0.047 "	6	12	13	10	MKP1G024703G	6	12.5	18	15	MKP1J024704C
	5	11	18	15	MKP1G024704B	6	15	26.5	22.5	MKP1J024705B
0.056 "	6	12.5	18	15	MKP1G025604C	7	14	18	15	MKP1J025604D
0.068 "	6	12.5	18	15	MKP1G026804C	7	14	18	15	MKP1J026804D
	6	15	26.5	22.5	MKP1G026805B	6	15	26.5	22.5	MKP1J026805B
0.082 "	7	14	18	15	MKP1G028204D	9	16	18	15	MKP1J028204J

* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

** PCM = Printed circuit module = pin spacing

* Admissible AC voltage 280 VAC.

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:

Version code: 2-pin = 00
 4-pin = D4
 Tolerance: 20 % = M
 10 % = K
 5 % = J
 Packing: bulk = S
 Pin length: 6-2 = SD

Taped version see page 133.

Rights reserved to amend design data without prior notification.

Continuation

General Data

Capacitance	400 VDC/250 VAC*					630 VDC/400 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.1 μ F	7	14	18	15	MKP1G031004D_____	9	16	18	15	MKP1J031004J_____
	6	15	26.5	22.5	MKP1G031005B_____	7	16.5	26.5	22.5	MKP1J031005D_____
0.12 "	8	15	18	15	MKP1G031204F_____	8.5	18.5	26.5	22.5	MKP1J031205F_____
0.15 "	8	15	18	15	MKP1G031504F_____	8.5	18.5	26.5	22.5	MKP1J031505F_____
	6	15	26.5	22.5	MKP1G031505B_____	9	19	31.5	27.5	MKP1J031506A_____
0.18 "	9	16	18	15	MKP1G031804J_____	8.5	18.5	26.5	22.5	MKP1J031805F_____
0.22 "	9	16	18	15	MKP1G032204J_____	8.5	18.5	26.5	22.5	MKP1J032205F_____
	7	16.5	26.5	22.5	MKP1G032205D_____	9	19	31.5	27.5	MKP1J032206A_____
0.27 "	8.5	18.5	26.5	22.5	MKP1G032705F_____	11	21	26.5	22.5	MKP1J032705L_____
0.33 "	8.5	18.5	26.5	22.5	MKP1G033305F_____	11	21	26.5	22.5	MKP1J033305L_____
	9	19	31.5	27.5	MKP1G033306A_____	11	21	31.5	27.5	MKP1J033306B_____
0.39 "	10.5	19	26.5	22.5	MKP1G033905G_____	11	21	31.5	27.5	MKP1J033906B_____
0.47 "	10.5	19	26.5	22.5	MKP1G034705G_____	11	21	31.5	27.5	MKP1J034706B_____
	9	19	31.5	27.5	MKP1G034706A_____					
0.56 "	11	21	26.5	22.5	MKP1G035605L_____	15	26	31.5	27.5	MKP1J035606F_____
0.68 "	11	21	26.5	22.5	MKP1G036805L_____	15	26	31.5	27.5	MKP1J036806F_____
	11	21	31.5	27.5	MKP1G036806B_____	13	24	41.5	37.5	MKP1J036807C_____
0.82 "	13	24	31.5	27.5	MKP1G038206D_____	17	29	31.5	27.5	MKP1J038206G_____
1.0 μ F	13	24	31.5	27.5	MKP1G041006D_____	17	29	31.5	27.5	MKP1J041006G_____
						15	26	41.5	37.5	MKP1J041007D_____
1.2 "	17	29	31.5	27.5	MKP1G041206G_____	20	39.5	31.5	27.5	MKP1J041206J_____
1.5 "	17	29	31.5	27.5	MKP1G041506G_____	20	39.5	31.5	27.5	MKP1J041506J_____
	13	24	41.5	37.5	MKP1G041507C_____	19	32	41.5	37.5	MKP1J041507F_____
1.8 "	20	39.5	31.5	27.5	MKP1G041806J_____	20	39.5	41.5	37.5	MKP1J041807G_____
2.2 "	20	39.5	31.5	27.5	MKP1G042206J_____	20	39.5	41.5	37.5	MKP1J042207G_____
	17	29	41.5	37.5	MKP1G042207E_____					
2.7 "	20	39.5	41.5	37.5	MKP1G042707G_____	24	45.5	41.5	37.5	MKP1J042707H_____
3.3 "	20	39.5	41.5	37.5	MKP1G043307G_____	24	45.5	41.5	37.5	MKP1J043307H_____
						28	38	41.5	37.5	MKP1J043307L_____
3.9 "	20	39.5	41.5	37.5	MKP1G043907G_____	35	50	41.5	37.5	MKP1J043907J_____
4.7 "	20	39.5	41.5	37.5	MKP1G044707G_____	35	50	41.5	37.5	MKP1J044707J_____
5.6 "	24	45.5	41.5	37.5	MKP1G045607H_____	40	55	41.5	37.5	MKP1J045607K_____
6.8 "	24	45.5	41.5	37.5	MKP1G046807H_____	40	55	41.5	37.5	MKP1J046807K_____
	28	38	41.5	37.5	MKP1G046807L_____	35	50	57	52.5	MKP1J046809F_____
8.2 "	35	50	41.5	37.5	MKP1G048207J_____	45	55	57	52.5	MKP1J048209H_____
10 μ F	35	50	41.5	37.5	MKP1G051007J_____	45	55	57	52.5	MKP1J051009H_____
	35	50	57	52.5	MKP1G051009F_____					
12 "	40	55	41.5	37.5	MKP1G051207K_____					
15 "	40	55	41.5	37.5	MKP1G051507K_____					
	35	50	57	52.5	MKP1G051509F_____					
18 "	45	65	57	52.5	MKP1G051809J_____					
22 "	45	65	57	52.5	MKP1G052209J_____					

* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_{\text{r}}$

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:

Version code:	2-pin	= 00
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD
Taped version see page 133.		

Rights reserved to amend design data without prior notification.

Continuation page 56

Continuation

General Data

Capacitance	850 VDC/450 VAC*					1000 VDC/600 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	4	9	10	7.5	MKP1M011002C-----	4	9	10	7.5	MKP1O111002C-----
	4	9	13	10	MKP1M011003C-----	4	9	13	10	MKP1O111003C-----
1200 "	4	9	10	7.5	MKP1M011202C-----	4	9	10	7.5	MKP1O111202C-----
1500 "	4	9	10	7.5	MKP1M011502C-----	4	9	10	7.5	MKP1O111502C-----
	4	9	13	10	MKP1M011503C-----	4	9	13	10	MKP1O111503C-----
1800 "	4	9	10	7.5	MKP1M011802C-----	4	9	10	7.5	MKP1O111802C-----
2200 "	4	9	10	7.5	MKP1M012202C-----	4	9	10	7.5	MKP1O112202C-----
	4	9	13	10	MKP1M012203C-----	4	9	13	10	MKP1O112203C-----
2700 "	4	9	10	7.5	MKP1M012702C-----	4	9	10	7.5	MKP1O112702C-----
3300 "	4	9	10	7.5	MKP1M013302C-----	4	9	10	7.5	MKP1O113302C-----
	4	9	13	10	MKP1M013303C-----	4	9	13	10	MKP1O113303C-----
3900 "	4.5	9.5	10.3	7.5	MKP1M013902D-----	4.5	9.5	10.3	7.5	MKP1O113902D-----
4700 "	4.5	9.5	10.3	7.5	MKP1M014702D-----	4.5	9.5	10.3	7.5	MKP1O114702D-----
	4	9	13	10	MKP1M014703C-----	4	9	13	10	MKP1O114703C-----
5600 "	5.7	12.5	10.3	7.5	MKP1M015602F-----	5.7	12.5	10.3	7.5	MKP1O115602F-----
6800 "	5.7	12.5	10.3	7.5	MKP1M016802F-----	5.7	12.5	10.3	7.5	MKP1O116802F-----
	5	11	13	10	MKP1M016803F-----	5	11	13	10	MKP1O116803F-----
8200 "	5	11	13	10	MKP1M018203F-----	5	11	13	10	MKP1O118203F-----
0.01 µF	5	11	13	10	MKP1M021003F-----	5	11	13	10	MKP1O121003F-----
	5	11	18	15	MKP1M021004B-----	5	11	18	15	MKP1O121004B-----
0.012 "	6	12	13	10	MKP1M021203G-----	6	12	13	10	MKP1O121203G-----
0.015 "	6	12	13	10	MKP1M021503G-----	6	12	13	10	MKP1O121503G-----
	5	11	18	15	MKP1M021504B-----	5	11	18	15	MKP1O121504B-----
0.018 "	6	12.5	18	15	MKP1M021804C-----	6	12.5	18	15	MKP1O121804C-----
0.022 "	6	12.5	18	15	MKP1M022204C-----	6	12.5	18	15	MKP1O122204C-----
	6	15	26.5	22.5	MKP1M022205B-----	6	15	26.5	22.5	MKP1O122205B-----
0.027 "	7	14	18	15	MKP1M022704D-----	7	14	18	15	MKP1O122704D-----
0.033 "	7	14	18	15	MKP1M023304D-----	7	14	18	15	MKP1O123304D-----
	6	15	26.5	22.5	MKP1M023305B-----	6	15	26.5	22.5	MKP1O123305B-----
0.039 "	8	15	18	15	MKP1M023904F-----	8	15	18	15	MKP1O123904F-----
0.047 "	8	15	18	15	MKP1M024704F-----	8	15	18	15	MKP1O124704F-----
	6	15	26.5	22.5	MKP1M024705B-----	6	15	26.5	22.5	MKP1O124705B-----
0.056 "	7	16.5	26.5	22.5	MKP1M025605D-----	7	16.5	26.5	22.5	MKP1O125605D-----
0.068 "	7	16.5	26.5	22.5	MKP1M026805D-----	7	16.5	26.5	22.5	MKP1O126805D-----
0.082 "	7	16.5	26.5	22.5	MKP1M028205D-----	8.5	18.5	26.5	22.5	MKP1O128205F-----
0.1 µF	7	16.5	26.5	22.5	MKP1M031005D-----	8.5	18.5	26.5	22.5	MKP1O131005F-----
	11	21	31.5	27.5	MKP1M031006B-----	11	21	31.5	27.5	MKP1O131006B-----
0.12 "	8.5	18.5	26.5	22.5	MKP1M031205F-----	11	21	26.5	22.5	MKP1O131205I-----
0.15 "	8.5	18.5	26.5	22.5	MKP1M031505F-----	11	21	26.5	22.5	MKP1O131505I-----
	11	21	31.5	27.5	MKP1M031506B-----	11	21	31.5	27.5	MKP1O131506B-----
0.18 "	11	21	26.5	22.5	MKP1M031805I-----	11	21	31.5	27.5	MKP1O131806B-----
0.22 "	11	21	26.5	22.5	MKP1M032205I-----	11	21	31.5	27.5	MKP1O132206B-----
	11	21	31.5	27.5	MKP1M032206B-----					
0.27 "	11	21	31.5	27.5	MKP1M033306B-----	15	26	31.5	27.5	MKP1O132706F-----
0.33 "	15	26	31.5	27.5	MKP1M033306F-----	15	26	31.5	27.5	MKP1O133306F-----
	13	24	41.5	37.5	MKP1M033307C-----	13	24	41.5	37.5	MKP1O133307C-----
0.39 "	17	29	31.5	27.5	MKP1M033906G-----	17	29	31.5	27.5	MKP1O133906G-----
0.47 "	17	29	31.5	27.5	MKP1M034706G-----	17	29	31.5	27.5	MKP1O134706G-----
	13	24	41.5	37.5	MKP1M034707C-----	13	24	41.5	37.5	MKP1O134707C-----
0.56 "	17	29	41.5	37.5	MKP1M035607E-----	20	39.5	31.5	27.5	MKP1O135606J-----
0.68 "	20	39.5	31.5	27.5	MKP1M036806J-----	20	39.5	31.5	27.5	MKP1O136806J-----
	17	29	41.5	37.5	MKP1M036807E-----	17	29	41.5	37.5	MKP1O136807E-----
0.82 "	19	32	41.5	37.5	MKP1M038207F-----	20	39.5	41.5	37.5	MKP1O138207G-----

* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Rights reserved to amend design data without prior notification.

Continuation

General Data

Capacitance	850 VDC/450 VAC*					1000 VDC/600 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1.0 μ F	19	32	41.5	37.5	MKP1M041007F_____	20	39.5	41.5	37.5	MKP1O141007G_____
1.2 "	20	39.5	41.5	37.5	MKP1M041207G_____	24	45.5	41.5	37.5	MKP1O141207H_____
1.5 "	20	39.5	41.5	37.5	MKP1M041507G_____	24	45.5	41.5	37.5	MKP1O141507H_____
						28	38	41.5	37.5	MKP1O141507L_____
1.8 "	24	45.5	41.5	37.5	MKP1M041807H_____	31	46	41.5	37.5	MKP1O141807I_____
2.2 "	24	45.5	41.5	37.5	MKP1M042207H_____	31	46	41.5	37.5	MKP1O142207I_____
	28	38	41.5	37.5	MKP1M042207L_____					
2.7 "	35	50	41.5	37.5	MKP1M042707J_____	40	55	41.5	37.5	MKP1O142707K_____
3.3 "	35	50	41.5	37.5	MKP1M043307J_____	40	55	41.5	37.5	MKP1O143307K_____
	35	50	57	52.5	MKP1M043309F_____	35	50	57	52.5	MKP1O143309F_____
3.9 "	35	50	57	37.5	MKP1M043909F_____	45	55	57	52.5	MKP1O143909H_____
4.7 "	45	55	57	52.5	MKP1M044709H_____	45	55	57	52.5	MKP1O144709H_____
5.6 "	45	65	57	52.5	MKP1M045609J_____					

Capacitance	1600 VDC/650 VAC*					2000 VDC/700 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
1000 pF	4	9	13	10	MKP1T011003C_____	4	9	13	10	MKP1U011003C_____
1200 "	4	9	13	10	MKP1T011203C_____	4	9	13	10	MKP1U011203C_____
1500 "	4	9	13	10	MKP1T011503C_____	4	9	13	10	MKP1U011503C_____
1800 "	4	9	13	10	MKP1T011803C_____	5	11	13	10	MKP1U011803F_____
2200 "	4	9	13	10	MKP1T012203C_____	5	11	13	10	MKP1U012203F_____
						5	11	18	15	MKP1U012204B_____
2700 "	4	9	13	10	MKP1T012703C_____	5	11	18	15	MKP1U012704B_____
3300 "	4	9	13	10	MKP1T013303C_____	5	11	18	15	MKP1U013304B_____
3900 "	5	11	13	10	MKP1T013903F_____	5	11	18	15	MKP1U013904B_____
4700 "	5	11	13	10	MKP1T014703F_____	5	11	18	15	MKP1U014704B_____
						6	15	26.5	22.5	MKP1U014705B_____
5600 "	6	12	13	10	MKP1T015603G_____	6	12.5	18	15	MKP1U015604C_____
6800 "	6	12	13	10	MKP1T016803G_____	6	12.5	18	15	MKP1U016804C_____
	5	11	18	15	MKP1T016804B_____	6	15	26.5	22.5	MKP1U016805B_____
8200 "	5	11	18	15	MKP1T018204B_____	7	14	18	15	MKP1U018204D_____
0.01 μ F	5	11	18	15	MKP1T021004B_____	7	14	18	15	MKP1U021004D_____
						6	15	26.5	22.5	MKP1U021005B_____
0.012 "	6	12.5	18	15	MKP1T021204C_____	8	15	18	15	MKP1U021204F_____
0.015 "	6	12.5	18	15	MKP1T021504C_____	8	15	18	15	MKP1U021504F_____
	6	15	26.5	22.5	MKP1T021505B_____	6	15	26.5	22.5	MKP1U021505B_____
0.018 "	7	14	18	15	MKP1T022184D_____	9	16	18	15	MKP1U021804J_____
0.022 "	7	14	18	15	MKP1T022204D_____	9	16	18	15	MKP1U022204J_____
	6	15	26.5	22.5	MKP1T022205B_____	7	16.5	26.5	22.5	MKP1U022205D_____
0.027 "	8	15	18	15	MKP1T022704F_____	8.5	18.5	26.5	22.5	MKP1U022705F_____
0.033 "	8	15	18	15	MKP1T023304F_____	8.5	18.5	26.5	22.5	MKP1U023305F_____
	6	15	26.5	22.5	MKP1T023305B_____	9	19	31.5	27.5	MKP1U023306A_____
0.039 "	7	16.5	26.5	22.5	MKP1T023905D_____	10.5	19	26.5	22.5	MKP1U023905G_____
0.047 "	7	16.5	26.5	22.5	MKP1T024705D_____	10.5	19	26.5	22.5	MKP1U024705G_____
	9	19	31.5	27.5	MKP1T024706A_____	11	21	31.5	27.5	MKP1U024706B_____
0.056 "	10.5	19	26.5	22.5	MKP1T025605G_____	11	21	26.5	22.5	MKP1U025605I_____
0.068 "	10.5	19	26.5	22.5	MKP1T026805G_____	11	21	26.5	22.5	MKP1U026805I_____
	9	19	31.5	27.5	MKP1T026806A_____	11	21	31.5	27.5	MKP1U026806B_____
0.082 "	11	21	26.5	22.5	MKP1T028205I_____	13	24	31.5	27.5	MKP1U028206D_____

* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Rights reserved to amend design data without prior notification.

Continuation

General Data

Capacitance	1600 VDC/650 VAC*					2000 VDC/700 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.1 μ F	11	21	26.5	22.5	MKP1T031005L_____	13	24	31.5	27.5	MKP1U031006D_____
	11	21	31.5	27.5	MKP1T031006B_____					
0.12 "	13	24	31.5	27.5	MKP1T031206D_____	15	26	31.5	27.5	MKP1U031206F_____
0.15 "	13	24	31.5	27.5	MKP1T031506D_____	15	26	31.5	27.5	MKP1U031506F_____
						13	24	41.5	37.5	MKP1U031507C_____
0.18 "	15	26	31.5	27.5	MKP1T031806F_____	17	34.5	31.5	27.5	MKP1U031806L_____
0.22 "	15	26	31.5	27.5	MKP1T032206F_____	17	34.5	31.5	27.5	MKP1U032206L_____
	13	24	41.5	37.5	MKP1T032207C_____	17	29	41.5	37.5	MKP1U032207E_____
0.27 "	17	34.5	31.5	27.5	MKP1T032706L_____	19	32	41.5	37.5	MKP1U032707F_____
0.33 "	17	34.5	31.5	27.5	MKP1T033306L_____	19	32	41.5	37.5	MKP1U033307F_____
	17	29	41.5	37.5	MKP1T033307E_____					
0.39 "	20	39.5	31.5	27.5	MKP1T033906J_____	20	39.5	41.5	37.5	MKP1U033907G_____
0.47 "	20	39.5	31.5	27.5	MKP1T034706J_____	20	39.5	41.5	37.5	MKP1U034707G_____
	19	32	41.5	37.5	MKP1T034707F_____					
0.56 "	20	39.5	41.5	37.5	MKP1T035607G_____	24	45.5	41.5	37.5	MKP1U035607H_____
0.68 "	20	39.5	41.5	37.5	MKP1T036807G_____	24	45.5	41.5	37.5	MKP1U036807H_____
						28	38	41.5	37.5	MKP1U036807L_____
0.82 "	24	45.5	41.5	37.5	MKP1T038207H_____	35	50	41.5	37.5	MKP1U038207J_____
1.0 μ F	24	45.5	41.5	37.5	MKP1T041007H_____	35	50	41.5	37.5	MKP1U041007J_____
	28	38	41.5	37.5	MKP1T041007L_____					
1.2 "	31	46	41.5	37.5	MKP1T041207L_____	40	55	41.5	37.5	MKP1U041207K_____
1.5 "	31	46	41.5	37.5	MKP1T041507L_____	40	55	41.5	37.5	MKP1U041507K_____
						35	50	57	52.5	MKP1U041509F_____
1.8 "	40	55	41.5	37.5	MKP1T041807K_____	45	55	57	52.5	MKP1U041809H_____
2.2 "	40	55	41.5	37.5	MKP1T042207K_____	45	55	57	52.5	MKP1U042209H_____
	35	50	57	52.5	MKP1T042209F_____					
2.7 "	45	65	57	52.5	MKP1T042709J_____					
3.3 "	45	65	57	52.5	MKP1T043309J_____					

Capacitance	2500 VDC/700 VAC*					Part number
	W	H	L	PCM**		
1000 pF	5	11	18	15	MKP1V011004B_____	
	6	15	26.5	22.5	MKP1V011005B_____	
1200 "	5	11	18	15	MKP1V011204B_____	
1500 "	5	11	18	15	MKP1V011504B_____	
	6	15	26.5	22.5	MKP1V011505B_____	
1800 "	5	11	18	15	MKP1V011804B_____	
2200 "	5	11	18	15	MKP1V012204B_____	
	6	15	26.5	22.5	MKP1V012205B_____	
2700 "	5	11	18	15	MKP1V012704B_____	
3300 "	5	11	18	15	MKP1V013304B_____	
	6	15	26.5	22.5	MKP1V013305B_____	
3900 "	6	12.5	18	15	MKP1V013904C_____	
4700 "	6	12.5	18	15	MKP1V014704C_____	
	6	15	26.5	22.5	MKP1V014705B_____	
5600 "	7	14	18	15	MKP1V015604D_____	
6800 "	7	14	18	15	MKP1V016804D_____	
	7	16.5	26.5	22.5	MKP1V016805D_____	
8200 "	8.5	18.5	26.5	22.5	MKP1V018205F_____	

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:

Version code:

2-pin = 00

4-pin = D4

Tolerance:

20 % = M

10 % = K

5 % = J

Packing:

bulk = S

Pin length:

6-2 = SD

Taped version see page 133.

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:		
Version code:	2-pin	= 00
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD
Taped version see page 133.		

* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

** PCM = Printed circuit module = pin spacing

Rights reserved to amend design data without prior notification.

Continuation page 59

Continuation

General Data

Capacitance	2500 VDC/700 VAC*					3000 VDC/700 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 μ F	8.5	18.5	26.5	22.5	MKP1V021005F	8.5	18.5	26.5	22.5	MKP1W021005F
0.012 "	10.5	19	26.5	22.5	MKP1V021205G	10.5	19	26.5	22.5	MKP1W021205G
0.015 "	10.5	19	26.5	22.5	MKP1V021505G	10.5	19	26.5	22.5	MKP1W021505G
0.018 "	11	21	26.5	22.5	MKP1V021805L	11	21	26.5	22.5	MKP1W021805L
0.022 "	11	21	26.5	22.5	MKP1V022205I	11	21	26.5	22.5	MKP1W022205I
0.027 "	11	21	26.5	22.5	MKP1V022705I	11	21	26.5	22.5	MKP1W022705I
0.033 "	11	21	26.5	22.5	MKP1V023305L	11	21	26.5	22.5	MKP1W023305L
	9	19	31.5	27.5	MKP1V023306A	9	19	31.5	27.5	MKP1W023306A
0.039 "	11	21	31.5	27.5	MKP1V023906B	11	21	31.5	27.5	MKP1W023906B
0.047 "	11	21	31.5	27.5	MKP1V024706B	11	21	31.5	27.5	MKP1W024706B
0.056 "	13	24	31.5	27.5	MKP1V025606D	13	24	31.5	27.5	MKP1W025606D
0.068 "	13	24	31.5	27.5	MKP1V026806D	13	24	31.5	27.5	MKP1W026806D
0.082 "	15	26	31.5	27.5	MKP1V028206F	15	26	31.5	27.5	MKP1W028206F
0.1 μ F	15	26	31.5	27.5	MKP1V031006F	15	26	31.5	27.5	MKP1W031006F
	13	24	41.5	37.5	MKP1V031007C	13	24	41.5	37.5	MKP1W031007C
0.12 "	17	34.5	31.5	27.5	MKP1V031206L	17	34.5	31.5	27.5	MKP1W031206L
0.15 "	17	34.5	31.5	27.5	MKP1V031506L	17	34.5	31.5	27.5	MKP1W031506L
	15	26	41.5	37.5	MKP1V031507D	15	26	41.5	37.5	MKP1W031507D
0.18 "	19	32	41.5	37.5	MKP1V031807F	19	32	41.5	37.5	MKP1W031807F
0.22 "	19	32	41.5	37.5	MKP1V032207F	19	32	41.5	37.5	MKP1W032207F
0.27 "	24	45.5	41.5	37.5	MKP1V032707H	24	45.5	41.5	37.5	MKP1W032707H
0.33 "	24	45.5	41.5	37.5	MKP1V033307H	24	45.5	41.5	37.5	MKP1W033307H
	28	38	41.5	37.5	MKP1V033307L	28	38	41.5	37.5	MKP1W033307L
0.39 "	31	46	41.5	37.5	MKP1V033907I	31	46	41.5	37.5	MKP1W033907I
0.47 "	31	46	41.5	37.5	MKP1V034707L	31	46	41.5	37.5	MKP1W034707L
0.56 "	35	50	41.5	37.5	MKP1V035607J	35	50	41.5	37.5	MKP1W035607J
0.68 "	35	50	41.5	37.5	MKP1V036807J	35	50	41.5	37.5	MKP1W036807J
0.82 "	40	55	41.5	37.5	MKP1V038207K	40	55	41.5	37.5	MKP1W038207K
1.0 μ F	40	55	41.5	37.5	MKP1V041007K	40	55	41.5	37.5	MKP1W041007K
	35	50	57	52.5	MKP1V041009F	35	50	57	52.5	MKP1W041009F
1.2 "	45	55	57	52.5	MKP1V041209H	45	55	57	52.5	MKP1W041209H
1.5 "	45	55	57	52.5	MKP1V041509H	45	55	57	52.5	MKP1W041509H

* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

** PCM = Printed circuit module = pin spacing


Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:


Version code: 2-pin = 00
4-pin = D4
Tolerance: 20 % = M
10 % = K
5 % = J
Packing: bulk = S
Pin length: 6-2 = SD
Taped version see page 133.

2-pin version

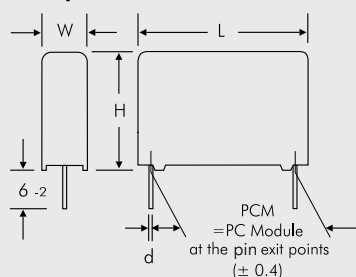

$\varnothing d$	PCM
0.6	7.5 - 10
0.8	15 - 27.5
1.0	37.5

4-pin version

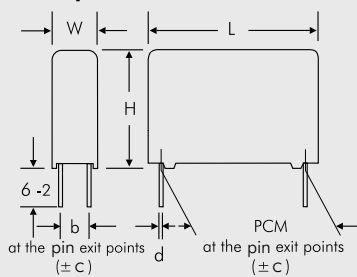








W	PCM	b	$\varnothing d$	c
17	37.5	10	1.0	0.4
19	37.5	10	1.0	0.4
20	37.5	12.5	1.0	0.4
24	37.5	12.5	1.0	0.4
28	37.5	10	1.0	0.4
31	37.5	20	1.0	0.4
35	37.5	20	1.0	0.4
40	37.5	20	1.0	0.4
35	52.5	20	1.2	0.8
45	52.5	20	1.2	0.8

Rights reserved to amend design data without prior notification.

Continuation page 60

Continuation










Impedance change with frequency
(general guide).

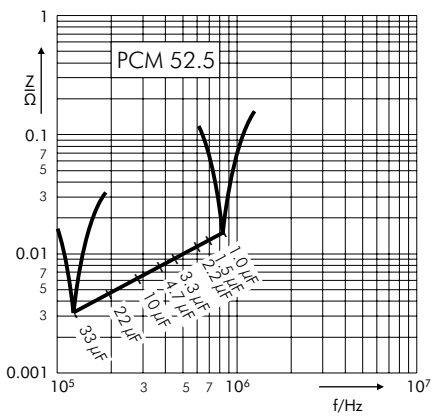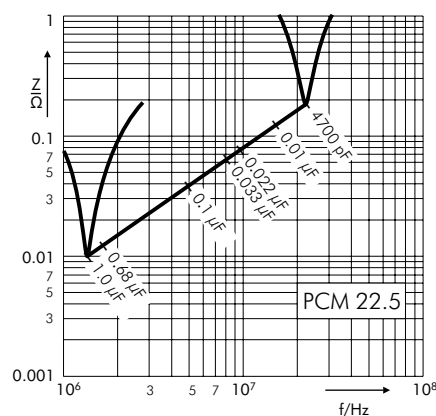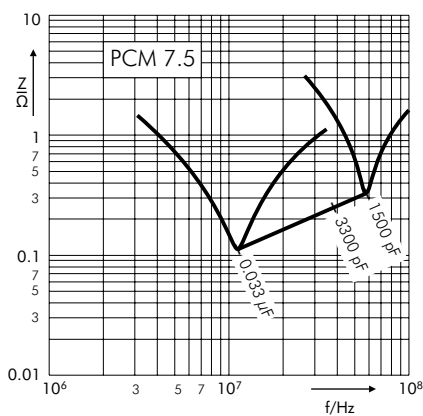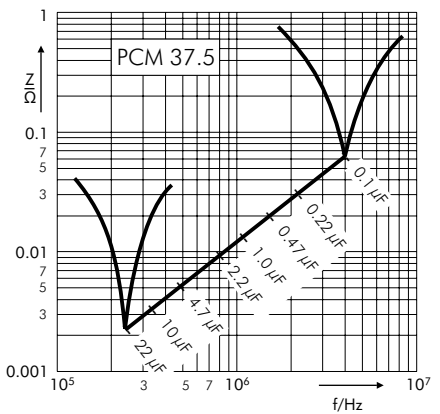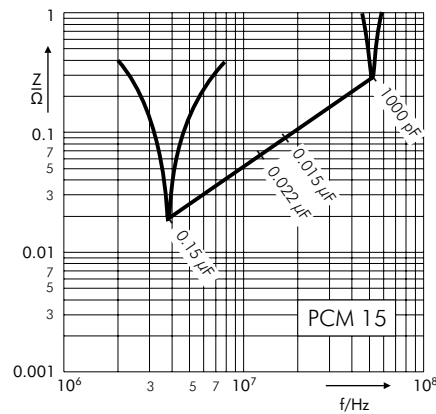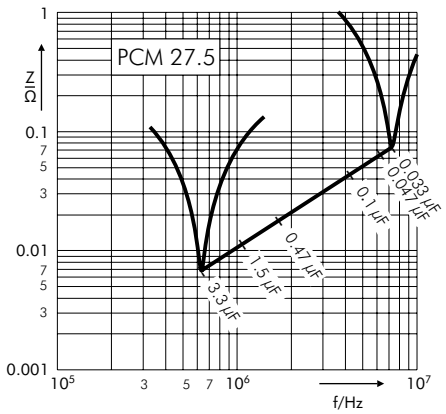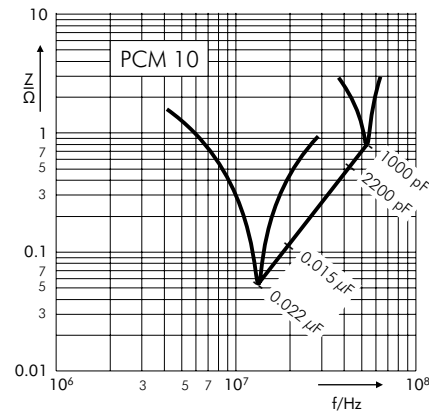

Continuation

Permissible AC voltage in relation to frequency till
15° C internal temperature rise (general guide).










The information behind the cross bar denote the PCM
of the measured value.

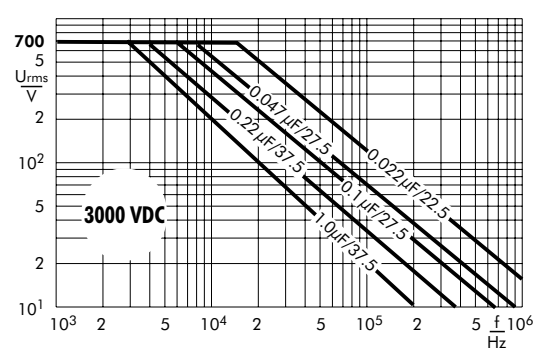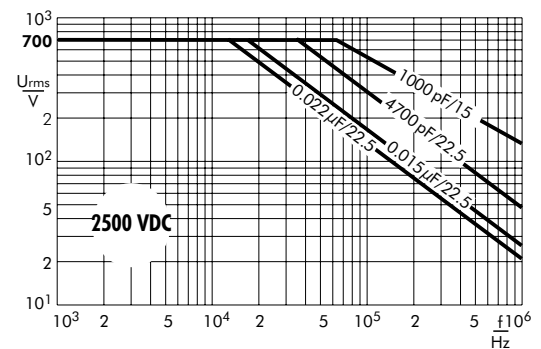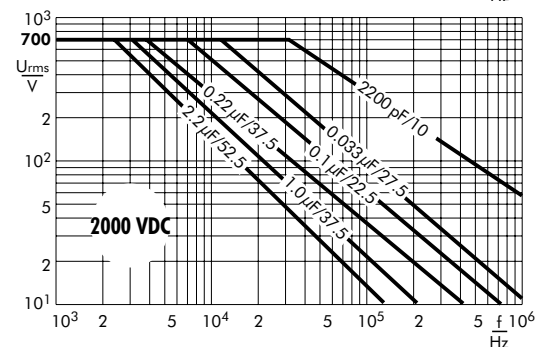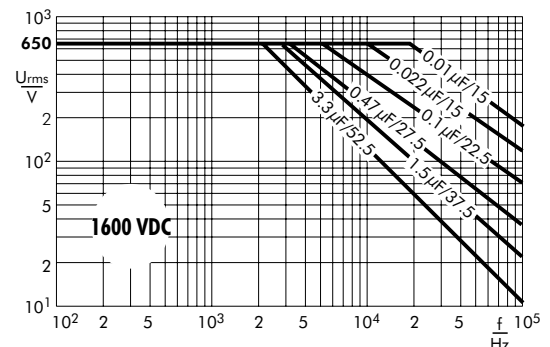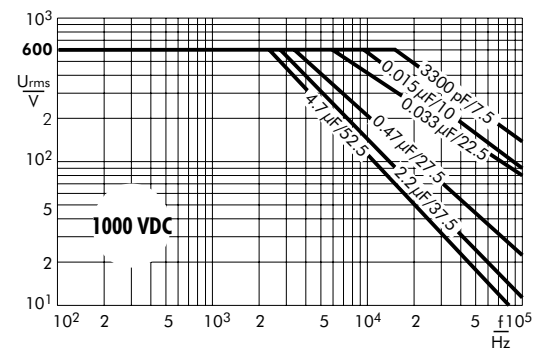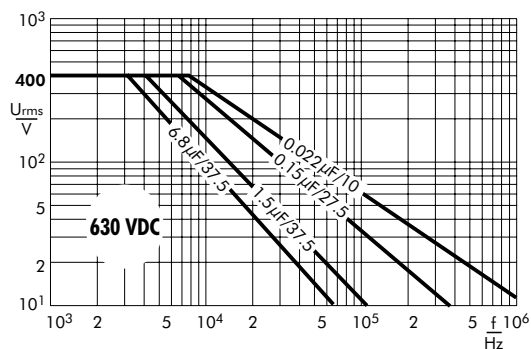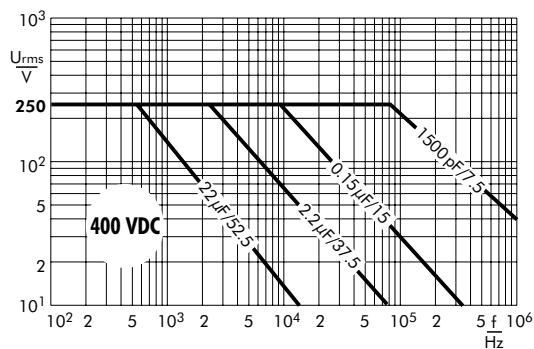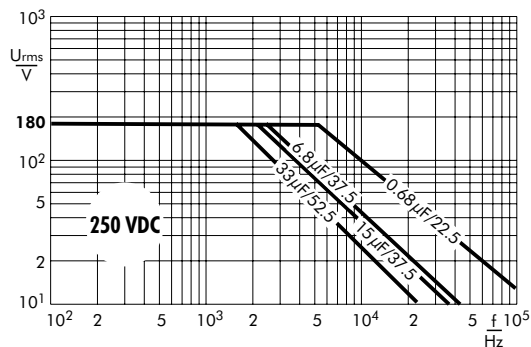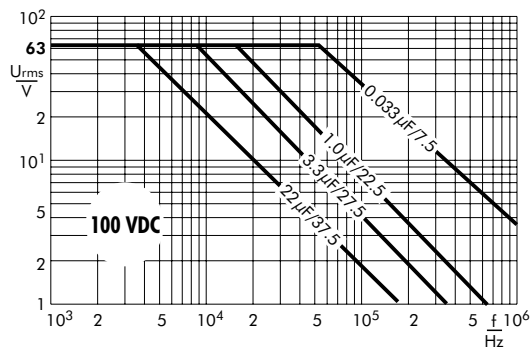

Continuation

Permissible AC current in relation to frequency till 15° C internal temperature rise (general guide).

The information behind the cross bar denote the PCM of the measured value.

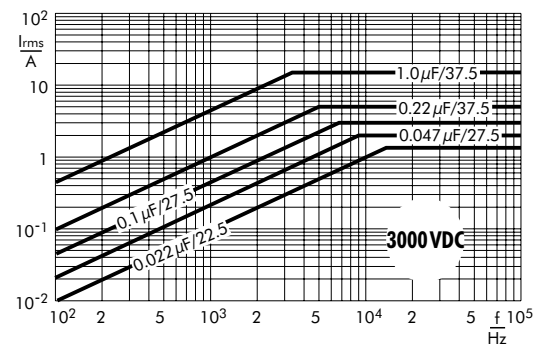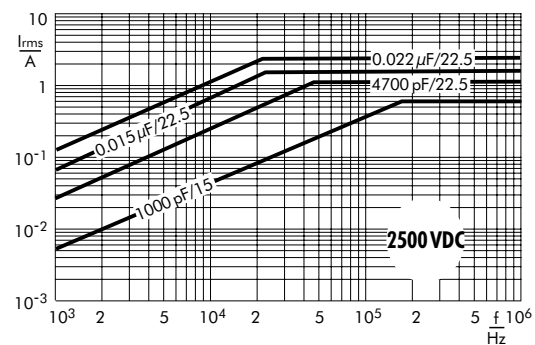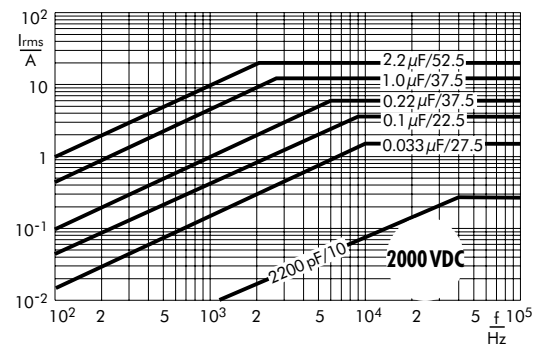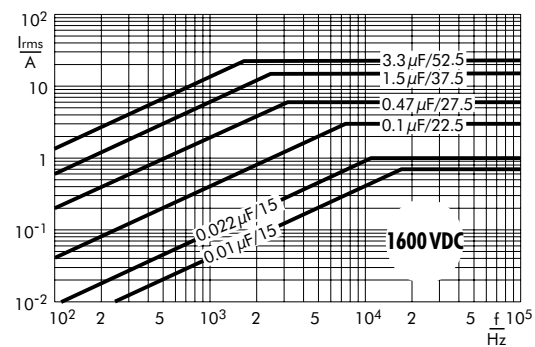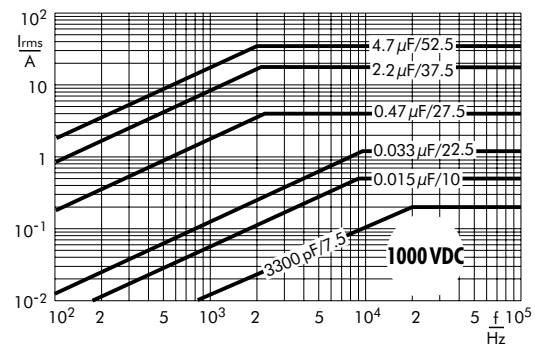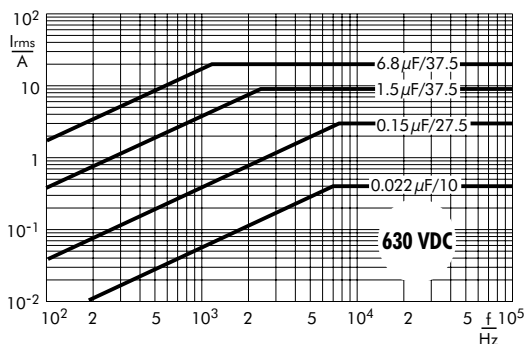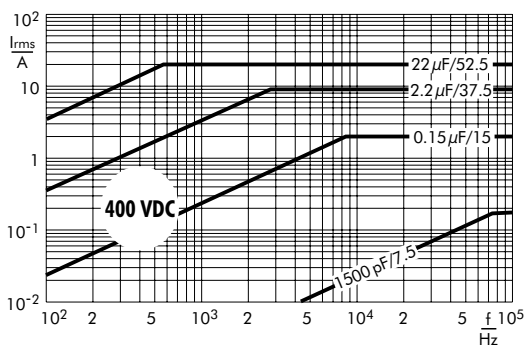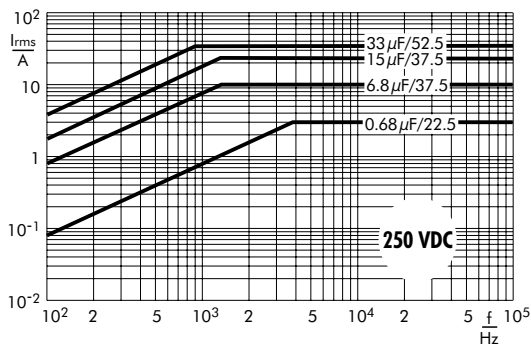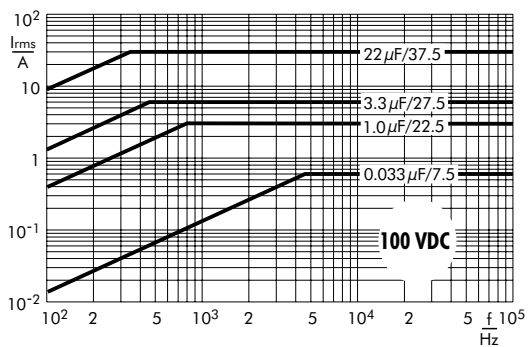

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{\max.} \leq 125^{\circ}\text{C}$
soldering: $T_{\max.} \leq 135^{\circ}\text{C}$

Polypropylene: preheating: $T_{\max.} \leq 100^{\circ}\text{C}$
soldering: $T_{\max.} \leq 110^{\circ}\text{C}$

Single wave soldering


Soldering bath temperature: $T < 260^{\circ}\text{C}$
Dwell time: $t < 5\text{ sec}$

Double wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$
Dwell time: $\sum t < 5\text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

Wave soldering

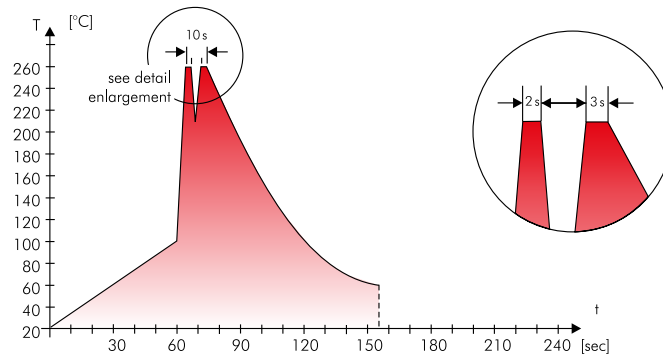

Typical temperature/time graph for double wave soldering

WIMA Quality and Environmental Philosophy

ISO 9001:2015 Certification

ISO 9001:2015 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2015 of our factories certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2015/863/EU as amended from time to time certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has re-frained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2015/863/EU

WIMA capacitors are lead free in accordance with RoHS 2015/863/EU

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration

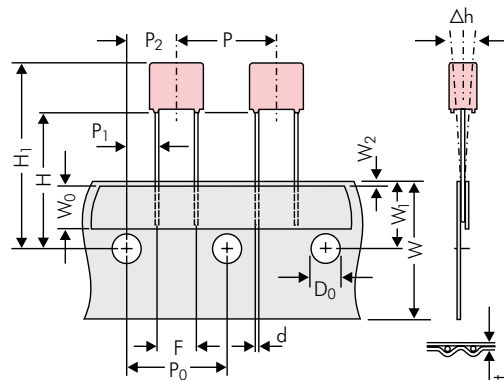


Diagram 1:
PCM 2.5/5/7.5mm

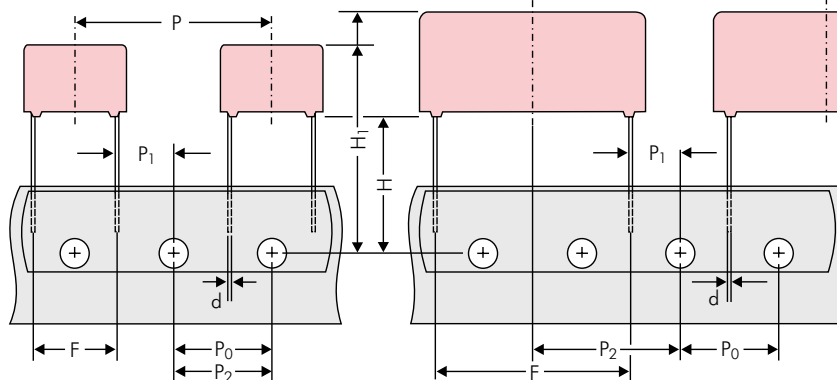


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 taping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping						
		PCM 2.5 taping	PCM 5 taping	PCM 7.5 taping	PCM 10 taping*	PCM 15 taping*	PCM 22.5 taping	PCM 27.5 taping
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5
Hold-down tape width	W ₀	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape
Hole position	W ₁	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5
Hold-down tape position	W ₂	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.
Feed hole diameter	D ₀	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	*38.1 ±1.5 or 50.8 ±1.5
Feed hole pitch	P ₀	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch	12.7 ±0.3 error max. 1.0 mm/20 pitch
Feed hole centre to pin	P ₁	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7
Hole centre to component centre	P ₂	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3
Feed hole centre to bottom edge of the component	H ▲	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5
Feed hole centre to top edge of the component	H ₁	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 24.5 to 31.5	H+H _{component} < H ₁ 25.0 to 31.5	H+H _{component} < H ₁ 26.0 to 37.0	H+H _{component} < H ₁ 30.0 to 43.0	H+H _{component} < H ₁ 35.0 to 45.0
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 ^{+0.8} _{-0.2}	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	*0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	*0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.
Total tape thickness	t	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2
Package (see also page 134)	▲	ROLL/AMMO			AMMO			
		REEL Ø 360 max. Ø 30 ±1	B 52 ±2 58 ±2 depending on comp. dimensions		REEL Ø 360 max. Ø 30 ±1	B 52 ±2 58 ±2 or 66 ±2	REEL Ø 500 max. Ø 25 ±1	B 54 ±2 60 ±2 or 68 ±2 depending on PCM and component dimensions
Unit		see details page 135.						

▲ When ordering please specify dimension H and required packaging type.

Dims in mm.

• Diameter of pins see General Data.


Please clarify customer-specific deviations with the manufacturer.

* PCM 10 and PCM 15 can be crimped to PCM 7.5.


Position of components according to PCM 7.5 (sketch 1). P₀ = 12.7 or 15.0 is possible

Types of Tape Packaging of Capacitors for Automatic Radial Insertion


■ ROLL Packaging

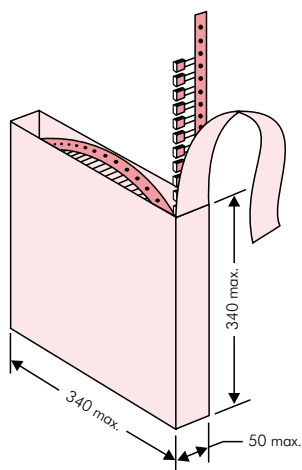

■ AMMO Packaging

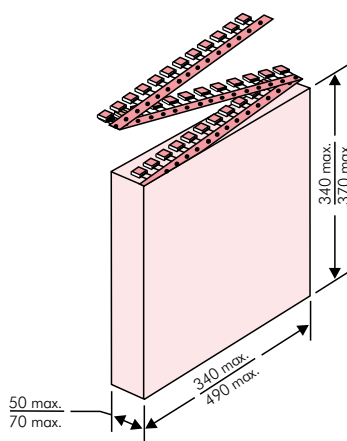

■ REEL Packaging

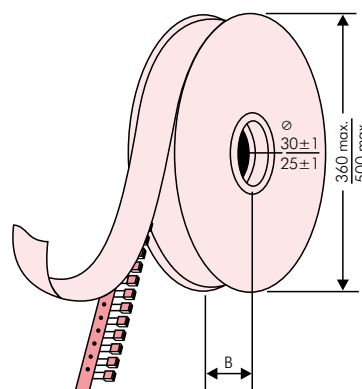

BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumeric Bar Code

- WIMA supplier number
- Date code
- Customer's P/O number
- P/O line
- Customer's part number
- WIMA part number
- Quantity
- WIMA confirmation number
- Country of origin
- Customer name
- Handling unit number
- Week of delivery.

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- technical note
- capacitance tolerance
- packing
- connecting information

BARCODE PDF417

BARCODE 2D Datamatrix

WIMA Best Capacitors Made in Germany	
Werk Aurich	
Supplier-ID: LIEF.NR.	Date Code: 20210419
	
Purchase Order No. (P/O): Bestellung xyz	P/O line: 100
	
Customer Part No.: KUNDENTEILENUMMER	
	
WIMA Part No.: MKP1F041006B00KSSD	Quantity: 459
	
WIMA Confirmation No.: 0001105072000100	
	
Customer No.: 0000100002	RoHS 2011/65/EU
Gross Weight [g]: 4557	COO: DE
	
WIMA - MKP 10 WIMA Part No.: MKP1F041006B00KSSD	
MKP 10 1.0 µF 250 VDC 11x21x31.5 RM27.5	
Standard 10%	Loss - Standard
Vorlage Debitor Inland	Drahte 6-2
	0001105072000100
1002021443	QTY: 459 Week 19/2021

Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm



PCM	Size				bulk	ROLL		pcs. per packing unit				AMMO			
								REEL							
	W	H	L	Codes	S	H16.5	H18.5	Ø 360	Ø 500	H16.5	H18.5	340 x 340	490 x 370	H16.5	H18.5
						N	O	F	I	H	J	A	C	B	D
2.5 mm	2.5	7	4.6	0B	5000	2200		2500		–		2800		–	
	3	7.5	4.6	0C	5000	2000		2300		–		2300		–	
	3.8	8.5	4.6	0D	5000	1500		1800		–		1800		–	
	4.6	9	4.6	0E	5000	1200		1500		–		1500		–	
	5.5	10	4.6	0F	5000	900		1200		–		1200		–	
5 mm	2.5	6.5	7.2	1A	5000	2200		2500		–		2800		–	
	3	7.5	7.2	1B	5000	2000		2300		–		2300		–	
	3.5	8.5	7.2	1C	5000	1600		2000		–		2000		–	
	4.5	6	7.2	1D	6000	1300		1500		–		1500		–	
	4.5	9.5	7.2	1E	4000	1300		1500		–		1500		–	
	5	10	7.2	1F	3500	1100		1400		–		1400		–	
	5.5	7	7.2	1G	4000	1000		1200		–		1200		–	
	5.5	11.5	7.2	1H	2500	1000		1200		–		1200		–	
	6.5	8	7.2	1I	2500	800		1000		–		1000		–	
	7.2	8.5	7.2	1J	2500	700		1000		–		1000		–	
	7.2	13	7.2	1K	2000	700		950		–		1000		–	
	8.5	10	7.2	1L	2000	600		800		–		800		–	
	8.5	14	7.2	1M	1500	600		800		–		800		–	
	11	16	7.2	1N	1000	500		600		–		640		–	
	11	18	7.2	1O	1000	500		600		–		640		–	
7.5 mm	2.5	7	10	2A	5000	–		2500		4400		2500		–	
	3	8.5	10	2B	5000	–		2200		4300		2300		4150	
	4	9	10	2C	4000	–		1700		3200		1700		3000	
	4.5	9.5	10.3	2D	3500	–		1500		2900		1400		2700	
	5	10.5	10.3	2E	3000	–		1300		2500		1300		–	
	5.7	12.5	10.3	2F	2000	–		1000		2200		1100		–	
	7.2	12.5	10.3	2G	1500	–		900		1800		1000		–	
10 mm	4	9	13	3C	3000	–		900		1600		–		1450	
	4	9.5	13	3D	3000	–		900		1600		–		1400	
	5	11	13	3F	3000	–		700		1300		–		1100	
	6	12	13	3G	2400	–		550		1100		–		1000	
	6	12.5	13	3H	2400	–		550		1100		–		1000	
	8	12	13	3I	2000	–		400		800		–		740	
15 mm	5	11	18	4B	2400	–		600		1200		–		1150	
	6	12.5	18	4C	2000	–		500		1000		–		1000	
	7	14	18	4D	1600	–		450		900		–		850	
	8	15	18	4F	1200	–		400		800		–		740	
	9	14	18	4H	1200	–		350		700		–		650	
	9	16	18	4J	900	–		350		700		–		650	
	11	14	18	4M	1000	–		300		600		–		540	
22.5 mm	5	14	26.5	5A	1200	–		–		800		–		770	
	6	15	26.5	5B	1000	–		–		700		–		640	
	7	16.5	26.5	5D	760	–		–		600		–		550	
	8.5	18.5	26.5	5F	500	–		–		480		–		450	
	10.5	19	26.5	5G	594*	–		–		400		–		360	
	10.5	20.5	26.5	5H	594*	–		–		400		–		360	
	11	21	26.5	5I	561*	–		–		380		–		350	

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

Rights reserved to amend design data without prior notification.



Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	ROLL		REEL				AMMO			
						H16.5	H18.5	Ø 360		Ø 500		340 x 340		490 x 370	
	W	H	L	Codes				H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5
					S	N	O	F	I	H	J	A	C	B	D
27.5 mm	9	19	31.5	6A	567*	—	—	—	—	460/340*	—	—	—	—	—
	11	21	31.5	6B	459*	—	—	—	—	380/280*	—	—	—	—	—
	13	24	31.5	6D	378*	—	—	—	—	300	—	—	—	—	—
	15	26	31.5	6F	324*	—	—	—	—	270	—	—	—	—	—
	17	29	31.5	6G	198*	—	—	—	—	—	—	—	—	—	—
	17	34.5	31.5	6I	198*	—	—	—	—	—	—	—	—	—	—
	20	39.5	31.5	6J	162*	—	—	—	—	—	—	—	—	—	—
37.5 mm**	9	19	41.5	7A	441*	—	—	—	—	—	—	—	—	—	—
	11	22	41.5	7B	357*	—	—	—	—	—	—	—	—	—	—
	13	24	41.5	7C	294*	—	—	—	—	—	—	—	—	—	—
	15	26	41.5	7D	252*	—	—	—	—	—	—	—	—	—	—
	17	29	41.5	7E	154*	—	—	—	—	—	—	—	—	—	—
	19	32	41.5	7F	140*	—	—	—	—	—	—	—	—	—	—
	20	39.5	41.5	7G	126*	—	—	—	—	—	—	—	—	—	—
	24	45.5	41.5	7H	112*	—	—	—	—	—	—	—	—	—	—
	28	38	41.5	7L	84*	—	—	—	—	—	—	—	—	—	—
	31	46	41.5	7I	84*	—	—	—	—	—	—	—	—	—	—
	35	50	41.5	7J	35*	—	—	—	—	—	—	—	—	—	—
48.5 mm**	19	31	56	8D	120*	—	—	—	—	—	—	—	—	—	—
	23	34	56	8E	80*	—	—	—	—	—	—	—	—	—	—
	27	37.5	56	8H	84*	—	—	—	—	—	—	—	—	—	—
	33	48	56	8J	25*	—	—	—	—	—	—	—	—	—	—
	37	54	56	8L	25*	—	—	—	—	—	—	—	—	—	—
52.5 mm	25	45	57	9D	70*	—	—	—	—	—	—	—	—	—	—
	30	45	57	9E	60*	—	—	—	—	—	—	—	—	—	—
	35	50	57	9F	25*	—	—	—	—	—	—	—	—	—	—
	45	55	57	9H	20*	—	—	—	—	—	—	—	—	—	—
	45	65	57	9J	20*	—	—	—	—	—	—	—	—	—	—

* TPS (Tray-Packing-System). Plate versions may have different packing units.

**For Snubber capacitors in 2-pin version the PCM is changing to 38.5 respective 49.5 mm.
Samples and pre-production needs on request.

Rights reserved to amend design data without prior notification.

Updated data on www.wima.com



A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 µF				2.5x6.5x7.2		-		20%		bulk	6 -2
Type description:				Rated voltage:		Capacitance:				Size:				Tolerance:			
SMD-PET = SMDT				63 VDC = C0		22 pF = 0022				4.8x3.3x3 Size 1812 = KA				±20% = M			
SMD-PPS = SMDI				100 VDC = D0		47 pF = 0047				4.8x3.3x4 Size 1812 = KB				±10% = K			
MKS 02 = MKS0				250 VDC = F0		100 pF = 0100				5.7x5.1x3.5 Size 2220 = QA				±5% = J			
FKS 2 = FKS2				400 VDC = G0		150 pF = 0150				5.7x5.1x4.5 Size 2220 = QB				±2.5% = H			
FKP 2 = FKP2				450 VDC = H0		220 pF = 0220				7.2x6.1x3 Size 2824 = TA				±1% = E			
MKS 2 = MKS2				520 VDC = H2		330 pF = 0330				7.2x6.1x5 Size 2824 = TB				...			
MKP 2 = MKP2				600 VDC = I0		470 pF = 0470				10.2x7.6x5 Size 4030 = VA							
MKS 4 = MKS4				630 VDC = J0		680 pF = 0680				12.7x10.2x6 Size 5040 = XA							
MKP 4 = MKP4				700 VDC = K0		1000 pF = 1100				15.3x13.7x7 Size 6054 = YA							
MKP 10 = MKP1				800 VDC = L0		1500 pF = 1150				2.5x7x4.6 PCM2.5 = 0B							
FKP 1 = FKP1				850 VDC = M0		2200 pF = 1220				3x7.5x4.6 PCM2.5 = 0C							
MKP-X2 = MKX2				900 VDC = N0		3300 pF = 1330				2.5x6.5x7.2 PCM5 = 1A							
MKP-X1 R = MKX1				1000 VDC = O1		4700 pF = 1470				3x7.5x7.2 PCM5 = 1B							
MKP-Y2 = MKY2				1100 VDC = P0		6800 pF = 1680				2.5x7x10 PCM7.5 = 2A							
Snubber MKP = SNMP				1200 VDC = Q0		0.01 µF = 2100				3x8.5x10 PCM7.5 = 2B							
Snubber FKP = SNFP				1250 VDC = R0		0.022 µF = 2220				3x9x13 PCM10 = 3A							
GTO MKP = GTOM				1500 VDC = S0		0.047 µF = 2470				4x9x13 PCM10 = 3C							
DC-LINK MKP 4 = DCP4				1600 VDC = T0		0.1 µF = 3100				5x11x18 PCM15 = 4B							
DC-LINK MKP 6 = DCP6				1700 VDC = TA		0.22 µF = 3220				6x12.5x18 PCM15 = 4C							
DC-LINK HC = DCHC				2000 VDC = U0		0.47 µF = 3470				5x14x26.5 PCM22.5 = 5A							
				2500 VDC = V0		1 µF = 4100				6x15x26.5 PCM22.5 = 5B							
				3000 VDC = W0		2.2 µF = 4220				9x19x31.5 PCM27.5 = 6A							
				4000 VDC = X0		4.7 µF = 4470				11x21x31.5 PCM27.5 = 6B							
				6000 VDC = Y0		10 µF = 5100				9x19x41.5 PCM37.5 = 7A							
				230 VAC = 3Y		22 µF = 5220				11x22x41.5 PCM37.5 = 7B							
				275 VAC = 1W		47 µF = 5470				19x31x56 PCM 48.5 = 8D							
				300 VAC = 2W		100 µF = 6100				25x45x57 PCM 52.5 = 9D							
				305 VAC = AW		220 µF = 6220				...							
				350 VAC = BW		1000 µF = 7100											
				440 VAC = 4W		1500 µF = 7150											
				...		...											
								Version code:				Pin length (untaped)					
								Standard = 00				3.5 ±0.5 = C9					
								Version A1 = 1A				6 -2 = SD					
								Version A1.1.1 = 1B				16 ±1 = P1					
								Version A2 = 2A				...					
								...				Pin length (taped)					
												none = 00					

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.