

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2007

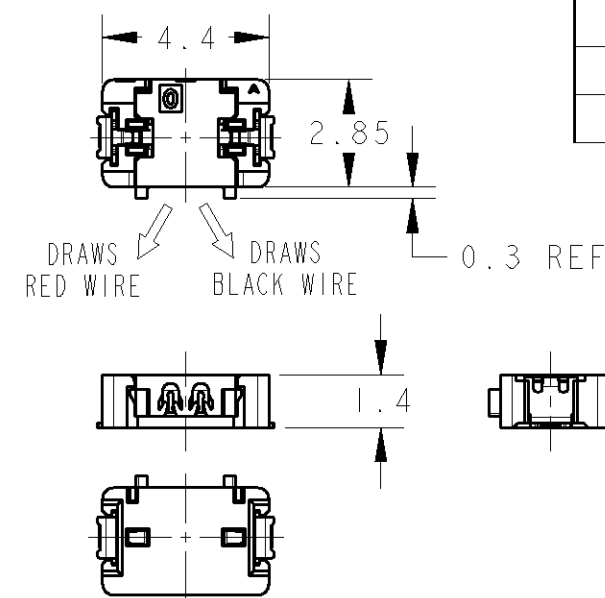
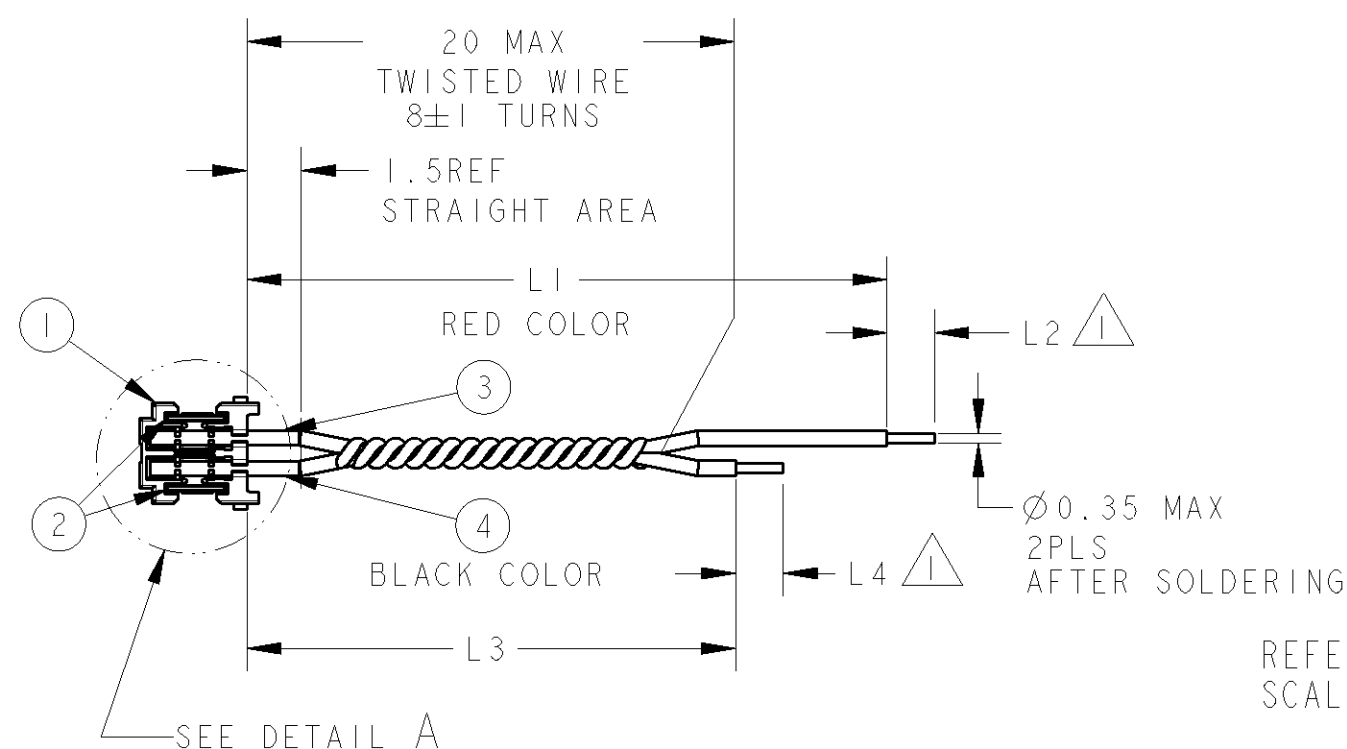
© COPYRIGHT 2007

BY TYCO ELECTRONICS CORPORATION, ALL RIGHTS RESERVED.

LOC
JDIST
-

REVISIONS

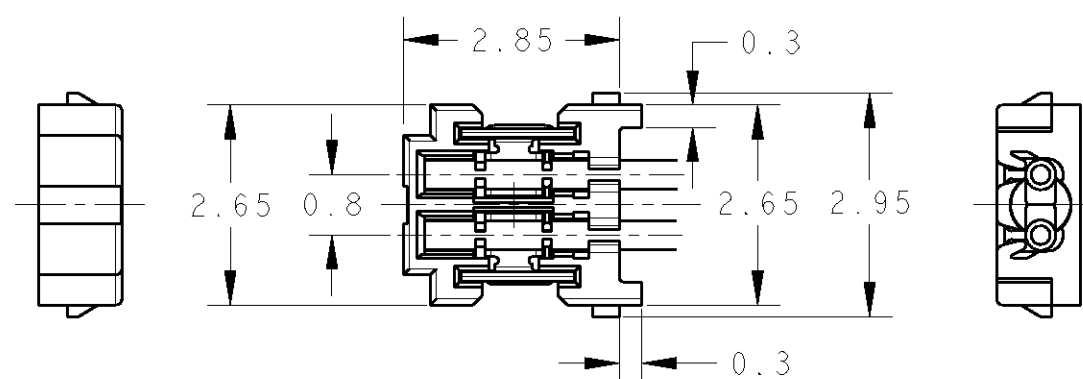
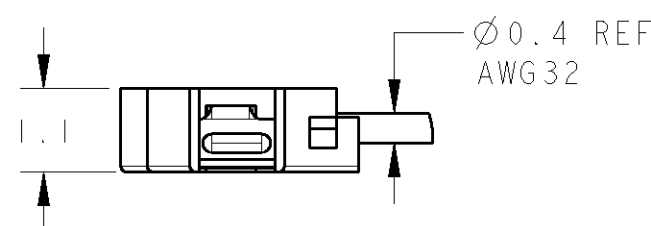
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED	23OCT2007	R.T	Y.N
	CI	REVISED	06DEC2007	R.T	Y.N

REFERENCE CONNECTOR MATING CONDITION
SCALE 5:1

NOTE

1 OUTER COVER CABLE IS PEELED AND SOLDERED.
THE STRANDED CONDUCTOR SHALL BE NOT BROKEN.

2 MINIMUM PACKING QTY: 120EA PER POLY BAG

DETAIL A, CONNECTOR DIMENSIONS
SCALE 10:1NOTICE:
THIS DRAWING INCLUDES TYCO ELECTRONICS CONFIDENTIAL OR
PROPRIETARY INFORMATION THAT MAY ALSO BE LEGALLY PRIVILEGED.

1±0.5	24±1	1±0.5	29±1	2013366-1
L4	L3	L2	L1	PART NUMBER

1	UL1867 PVC FREE INSULATED SOFT COPPER WIRE, AWG32, BLACK, SUMIFLON ETFE	BLACK CABLE	④
1	UL1867 PVC FREE INSULATED SOFT COPPER WIRE, AWG32, RED, SUMIFLON ETFE	RED CABLE	③
2	MICRO SLP WIRE CONNECTOR 2P, CONTACT MATERIAL: PHOS BRO FINISH: Au 0.3µm MIN OVER Ni 1.3µm MIN	CONTACT	②
1	MICRO SLP WIRE CONNECTOR 2P, INSULATOR MATERIAL: PA66, BR FREE	INSULATOR	①
QTY	MATERIAL, FINISH	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN R.TANAKA 11JUN2007	Tyco Electronics Tyco Electronics AMP K.K. Kawasaki, Japan	
		CHK C.OHASHI 11JUN2007		
		APVD Y.NAKAZAWA 11JUN2007	NAME MICRO SLP CONNECTOR, 2POS CABLE ASSEMBLY	
		PRODUCT SPEC 108-78466-1		
		APPLICATION SPEC 114-5426	SIZE A3	
		WEIGHT 0.03g		
MATERIAL SEE TABLE		FINISH SEE TABLE	CAGE CODE 00779	
		DRAWING NO C=2013366		RESTRICTED TO -
		CUSTOMER DRAWING		SCALE 5:1
		SHEET 1		OF 1
		REV CI		