


Data Sheet | Item Number: 294-4014

Lighting connector; push-button, external; without ground contact; 4-pole; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); white

<https://www.wago.com/294-4014>



Color: white

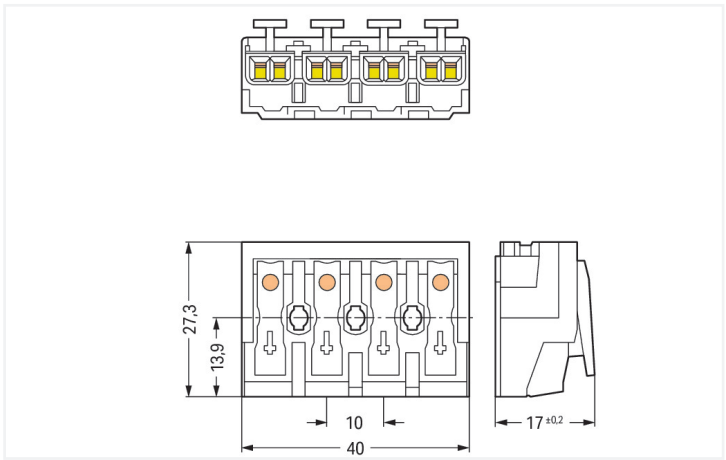

Dimensions in mm

Field-wiring terminal block, 294 Series, with 10 mm pin spacing

Connect conductors quickly and securely with this field-wiring terminal block (item number 294-4014). Conductors can only be connected to this field-wiring terminal block if their strip length is between 8 and 9 mm . This product features four conductor terminals and utilizes Push-in CAGE CLAMP® as well as PUSH WIRE®. Push-in CAGE CLAMP® connection technology is ideal for connecting all conductor types. Solid and fine-stranded conductors with ferrules can be pushed in without the need for tools—all thanks to its pluggable design. Our PUSH WIRE® connection uses the stiffness of the conductor to overcome the clamping spring's contact force, allowing you to clamp the conductor in place more quickly and easily. The item's dimensions are (40 x 17 x 27.3) mm (width x height x depth). Depending on the conductor type, this field-wiring terminal block is ideal for conductor cross sections ranging from 0.5 mm² to 2.5 mm² on one side and for conductor cross sections from 0.5 mm² to 2.5 mm² on the other side as well as conductor cross sections from 0.5 mm² to 1.5 mm² and from 0.5 mm² to 0.75 mm².

The contact surface is coated with tin.

Electrical data				
Ratings per		IEC/EN 60998-1		
Overvoltage category		III	III	II
Pollution degree		3	2	2
Nominal voltage		-	-	500 V
Rated impulse withstand voltage		-	-	4 kV
Rated current		-	-	24 A

Ratings per IEC/EN – Notes	
Ratings (note)	Connection points

Ratings per		IEC/EN 60998-2-2		
Overvoltage category		III	III	II
Pollution degree		3	2	2
Nominal voltage		-	-	500 V
Rated impulse withstand voltage		-	-	4 kV
Rated current		-	-	24 A

General information	
Wiring direction	Side-entry wiring

Connection 1	
Connection type	External 1
Connection technology	Push-in CAGE CLAMP®
Number of connection points	2
Actuation type	Push-button
Connectable conductor materials	Copper
Solid conductor	0.5 ... 2.5 mm ² / 18 ... 12 AWG
Solid conductor; push-in termination	0.5 ... 2.5 mm ² / 18 ... 12 AWG
Stranded conductor	0.5 ... 2.5 mm ² / 18 ... 14 AWG
Fine-stranded conductor	0.5 ... 2.5 mm ² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm ² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm ² / 18 ... 16 AWG
Fine-stranded conductor; with ferrule; push-in termination	0.5 mm ² / 18 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Pole number	4
Wiring direction	Side-entry wiring

Connection 3	
Connection type	Internal 3
Connection technology	PUSH WIRE®
Number of connection points	1
Actuation type	Push-in
Solid conductor	0.5 ... 1.5 mm² / 18 ... 16 AWG
Fine-stranded conductor; with insulated ferrule	0.5 ... 0.75 mm² / 18 AWG
Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1 mm² / 18 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data	
Pin spacing	10 mm / 0.394 inches
Width	40 mm / 1.575 inches
Height	17 mm / 0.669 inches
Depth	27.3 mm / 1.075 inches

Mechanical data		
Marking		1-2-Ⓢ-N
Mounting type		without snap-in mounting feet

Material data		
Note (material data)		Information on material specifications can be found here
Color		white
Material group		IIIa
Insulation material (main housing)		Polycarbonate (PC)
Flammability class per UL94		V0
Clamping spring material		Chrome-nickel spring steel (CrNi)
Contact material		Electrolytic copper (E _{Cu})
Contact Plating		Tin
Fire load		0.184 MJ
Halogen-free		Yes
Weight		12.2 g

Environmental requirements		
Temperature stability		120 °C
T marking		T85

Commercial data		
Product Group		8 (Misc. Chassis Mount Blocks)
PU (SPU)		500 pcs
Packaging type		Foil
Country of origin		CH
GTIN		4050821097679
Customs tariff number		85369010000

Product Classification		
UNSPSC		39121409
eCl@ss 10.0		27-14-11-06
eCl@ss 9.0		27-14-11-06
ETIM 9.0		EC001284
ETIM 10.0		EC001284
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption
SCIP notification number (Austria)		8a9937eb-f3d1-49fb-b86d-f0e1781e2681
SCIP notification number (Belgium)		0c421c4b-820e-489f-8d91-20a444d0436a
SCIP notification number (Bulgaria)		720baf07-9262-4bc9-b95c-160a2c9502f3
SCIP notification number (Czech Republic)		72bbdd4c-45cb-45fd-ab00-99fd69f39fc2
SCIP notification number (Denmark)		d1fc27a5-1994-43e9-90df-2907356b556d
SCIP notification number (Finland)		ee3b3c9d-4403-4e70-a8e9-82da24e443b1
SCIP notification number (France)		88d1a07d-815b-43db-a00c-154157e18926
SCIP notification number (Germany)		424284c7-382d-4be9-a0dd-d98e26995b02
SCIP notification number (Hungary)		61e783c9-d1c1-44f6-b429-f5f72d1bdcd7
SCIP notification number (Italy)		27f8c0ab-500e-4613-8be5-f2fe6fe55c47
SCIP notification number (Netherlands)		6500901a-8a08-42be-9aa9-64cd4224cc38
SCIP notification number (Poland)		e3294895-a420-4f0e-8fb0-2bd414cdfab4
SCIP notification number (Romania)		63e0d8bf-476a-44f5-a753-5a49e2d7bdee

Environmental Product Compliance	
SCIP notification number (Sweden)	ce9c7f93-d87e-4b70-9371-5e5a5f4c420e

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
			UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 294-4014	

Documentation

Bid Text			
294-4014	19.02.2019	xml 5.58 KB	
294-4014	13.06.2017	doc 27.50 KB	

CAD/CAE-Data

CAD data		CAE data	
2D/3D Models 294-4014		WSCAD Universe 294-4014	
		ZUKEN Portal 294-4014	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Strain relief

1.1.1.1 Strain relief

Item No.: 294-370
Strain relief; for 294 Series; with snap-in mounting feet; white

Item No.: 294-375
Strain relief; for 294 Series; without snap-in mounting feet; white

1.1.1.2 Strain relief plate

Item No.: 294-364
Strain relief plate; for 294 Series; for multi-core cables; 3- to 5-pole; with secured clamp; white

Item No.: 294-384
Strain relief plate; for 294 Series; for single strands; 3- to 5-pole; with secured clamp; white

1.1.2 Tool

1.1.2.2 Operating tool

Item No.: 206-294
Disconnection tool; green

Installation Notes

Installation

4-pole – without ground contact

Mounting hole for screw
Notice: The maximum thread diameter for self-tapping screws is 3 mm.

Hole for screw mount
Notice: The maximum thread diameter for self-tapping screws is 3 mm.

Conductor termination

Contact Technology

- Contact frame made of electrical grade copper, tin-plated
- Contact spring made of electrical grade copper, tin-plated
- Contact spring made of electrical grade copper, tin-plated
- Contact spring made of electrical grade copper, tin-plated

EUROPE
1 x 0.5 ... 2.5 mm ² "s"
1 x 0.5 ... 1.5 mm ² "s"
1 x 0.5 ... 0.75 mm ² "s"

AMERICA
1 x AWG 18 ... 14 "s"
1 x AWG 18 ... 16 "s"
1 x AWG 18 "s"

JAPAN
1 x 0.8 ... 1.6 mm diam. "s"
1 x 0.8 ... 1 mm diam. "s"
1 x 0.8 mm diam. "s"

EUROPE
2 x 0.5 ... 2.5 mm ² "s, str, f-str"

AMERICA
2 x AWG 18 ... 12 "s"
2 x AWG 18 ... 14 "s, f-str"

JAPAN
2 x 0.8 ... 2 mm diam. "s"
2 x 0.5 ... 2 mm ² "str, f-str"

External connection


Internal connection

Internal connection:
PUSH WIRE® for internal wiring with solid conductors

External connection:
Push-in CAGE CLAMP® for field-wiring with all conductor types



Conductor termination



Terminating five conductors per pole – solid and fine-stranded.

