

|                          |                                                                                                        |
|--------------------------|--------------------------------------------------------------------------------------------------------|
| Product Status           | Production                                                                                             |
| Applications             | Commercial Grade                                                                                       |
| Feature                  | MultilayerMultilayer<br>Non-Mag CoreNon-Magnetic Core (Dielectric Ceramic)<br>Super High QSuper High Q |
| Series   Type            | MHQ-P                                                                                                  |
| Brand                    | TDK                                                                                                    |
| Environmental Compliance | <div><div>RoHS</div><div>REACH</div><div>Halogen Free</div><div>Lead Free</div></div>                  |



| Size                         |                |
|------------------------------|----------------|
| Length(L)                    | 0.65mm ±0.05mm |
| Width(W)                     | 0.35mm ±0.05mm |
| Thickness   Height           | 0.35mm ±0.05mm |
| Recommended Land Pattern (A) | 0.25mm Nom.    |
| Recommended Land Pattern (B) | 0.30mm Nom.    |
| Recommended Land Pattern (C) | 0.30mm Nom.    |

| Electrical Characteristics     |                     |
|--------------------------------|---------------------|
| Inductance                     | 6.8nH ±5% at 500MHz |
| Rated Current                  | 300mA               |
| DC Resistance [Typ.]           | 530mΩ               |
| DC Resistance [Max.]           | 700mΩ               |
| Self Resonant Frequency [Min.] | 4GHz                |
| Self Resonant Frequency [Typ.] | 6.8GHz              |
| Q [Min.]                       | 16 at 500MHz        |
| Q [Typ.]                       |                     |





| Other                 |                                                    |
|-----------------------|----------------------------------------------------|
| Operating Temp. Range | -55 to 125°C                                       |
| Soldering Method      | Reflow                                             |
| AEC-Q200              | NO                                                 |
| Packing               | Punched (Paper)Taping [180mm Reel, Tape width 8mm] |
| Package Quantity      | 15000pcs                                           |
| Weight                | 0.0002g                                            |

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

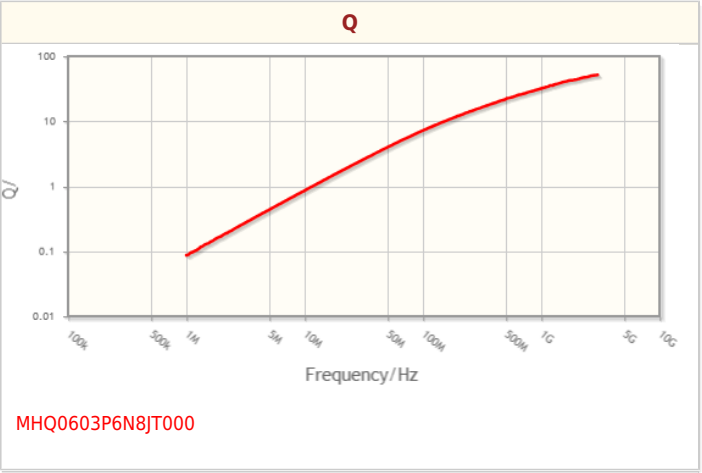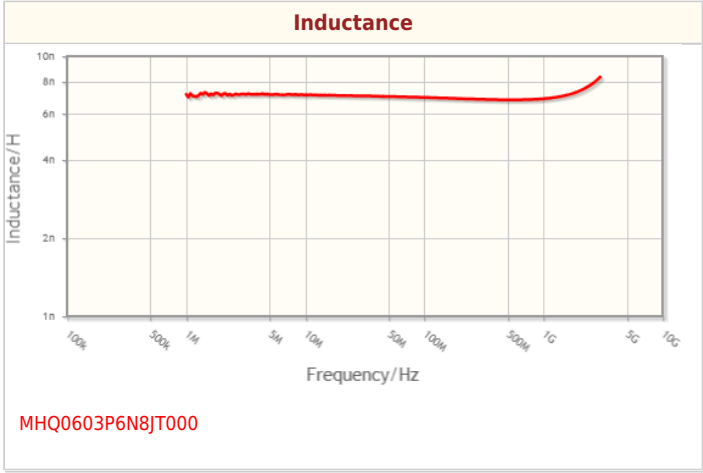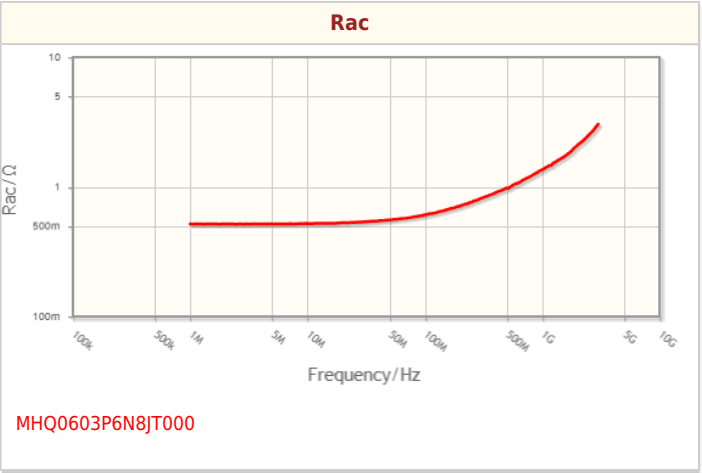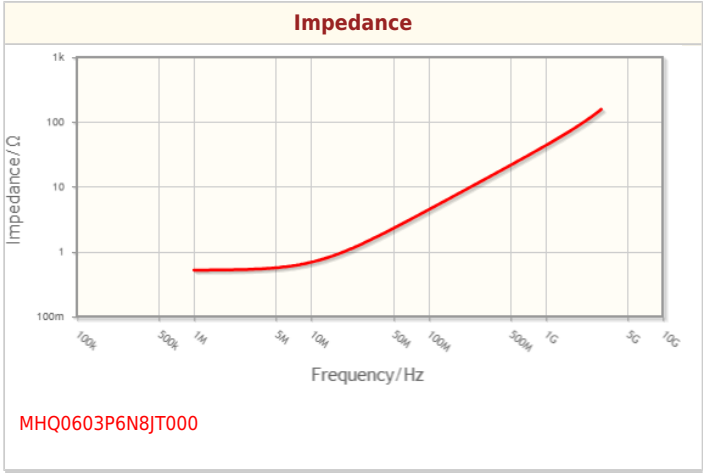

# Associated Images

