

Microchip**Filter specification****TFS1225C****1/5****Measurement condition**

Ambient temperature T_A :	23	°C
Input power level:	0	dBm
Terminating impedance:		
Input:	49 Ω -1 pF	
Output:	49 Ω -1 pF	

Characteristics

Remark:

The maximum attenuation in the pass band is defined as the insertion loss a_e . The nominal frequency f_N is fixed at 1225.0 MHz without any tolerance or limit. The values of absolute attenuation a_{abs} are guaranteed over the whole operating temperature range. The frequency shift of the filter within the operating temperature range is included in the production tolerance scheme.



D a t a		typ. value		tolerance / limit		
Insertion loss within PB		a_e	4.8 dB	max.	5.5	dB
Nominal frequency		f_N	-		1225.0	MHz
Passband		PB	-	$f_N \pm$	59.0	MHz
Passband variation		PBV	2.3 dB	max.	3.0	dB
Absolute attenuation		a_{abs}				
0.3 MHz ... 1100 MHz			26 dB	min.	23	dB
1100 MHz ... 1120 MHz			32 dB	min.	10	dB
1330 MHz ... 1350 MHz			18 dB	min.	10	dB
1350 MHz ... 3000 MHz			30 dB	min.	23	dB
Group delay ripple			-			
1166 MHz ... 1187 MHz			8 ns	max.	15	ns
1187 MHz ... 1217 MHz			7 ns	max.	15	ns
1217 MHz ... 1237 MHz			5 ns	max.	15	ns
1237 MHz ... 1254 MHz			9 ns	max.	15	ns
1254 MHz ... 1284 MHz			11 ns	max.	15	ns
Group delay variation (unit to unit)		*)	+/- 4 ns	max.	+/- 7	ns
Return loss within PB			10 dB	min.	8	dB
Input power level within PB			-	max.	10	dBm
Operating temperature range		OTR	-		-40 °C ... +85 °C	
Storage temperature range			-		-55 °C ... +125 °C	
Temperature coefficient of frequency		TC_f **)	-73 ppm/K			

*) measured at: f_N , $f_N + 59$ MHz, $f_N - 59$ MHz**) $\Delta f = TC_f(T - T_A)f_N$ **Generated:****Checked / Approved:**

Microchip Frequency Technology GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30


Microchip Frequency Technology GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Filter characteristic

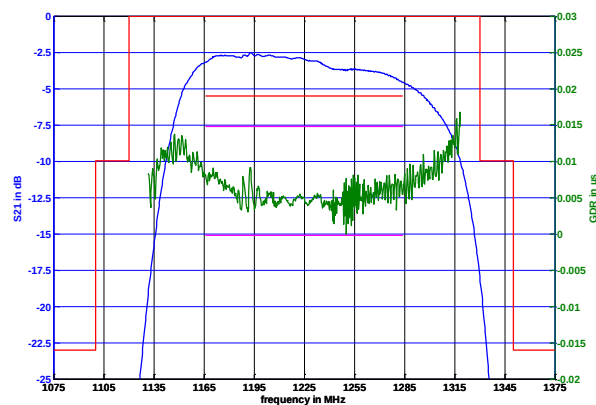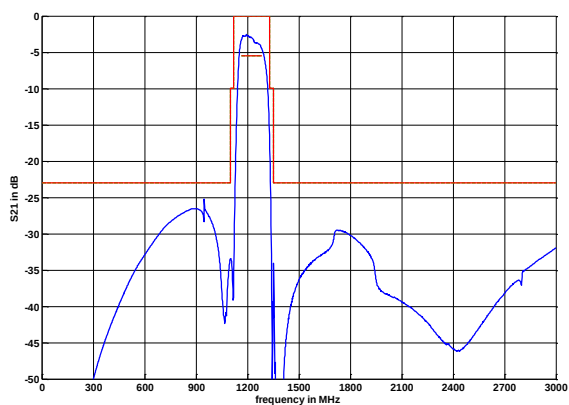

Construction and pin connection


(All dimensions in mm)

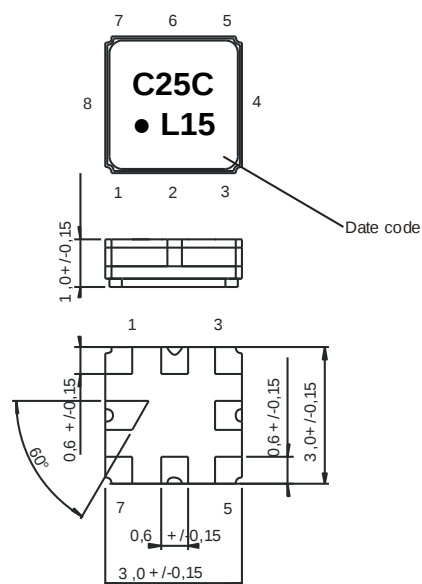

1	Ground
2	Input
3	Ground
4	Ground
5	Ground
6	Output
7	Ground
8	Ground

Date code:	Year + week
L	2019
M	2020
N	2021
...	

50 Ω Test circuit

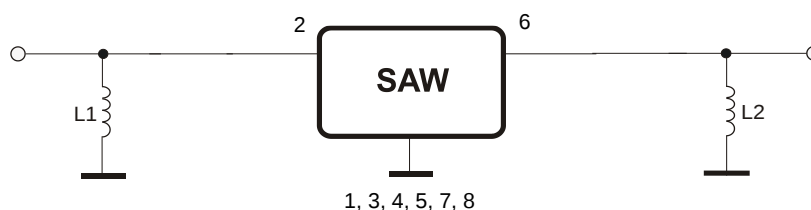

Microchip Frequency Technology GmbH

Potsdamer Straße 18

D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

Microchip Frequency Technology GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Stability characteristics, reliability

After the following tests the filter shall meet the whole specification:

1. Shock: 500 g, 1 ms, half sine wave, 3 shocks each plane;
DIN IEC 60068 T2 - 27
2. Vibration: 10 Hz to 2000 Hz, 0.35 mm or 5 g respectively, 1 octave per min, 10 cycles per plane, 3 planes; DIN IEC 60068 T2 - 6
3. Change of temperature: -55 °C to 125 °C / 15 min. each / 100 cycles
DIN IEC 60068 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: three times max.;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;
5. SAW devices are Electrostatic Discharge (ESD) sensitive devices.

This filter is RoHS compliant (2011/65/EU)

Packing

Tape & Reel: IEC 286 – 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;


reel of empty components at start:	min. 300 mm
reel of empty components at start including leader:	min. 500 mm
trailer:	min. 300 mm

Tape (all dimensions in mm)

W	: 8.00 ±0.3
Po	: 4.00 ±0.1
Do	: 1.50 +0.1/-0
E	: 1.75 ±0.1
F	: 3.50 ±0.05
G(min)	: 0.75
P2	: 2.00 ±0.05
P1	: 4.00 ±0.1
D1(min)	: 1.50
Ao	: 3.25 ±0.1
Bo	: 3.25 ±0.1
Ct	: 5.30 ±0.1
Ko	: 1.50 ±0.1
t	: 0.25 ±0.05

Reel (all dimensions in mm)

A	: 330 or 180
W1	: 8.40 +1.5/-0
W2(max)	: 14.40
N(min)	: 60.00
C	: 13.0 ±0.2

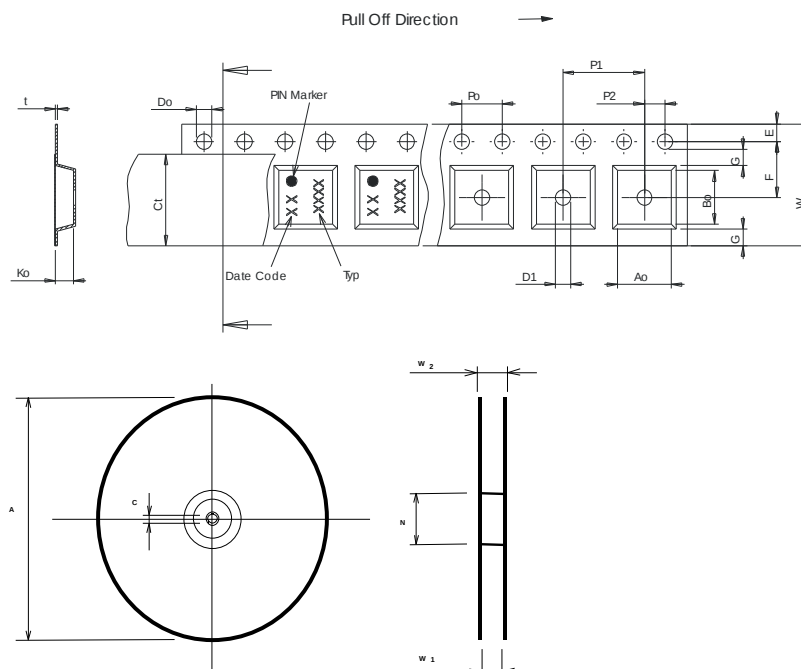

The minimum bending radius is 45 mm.

Microchip Frequency Technology GmbH

Potsdamer Straße 18


D 14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

Microchip Frequency Technology GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Air reflow temperature conditions

Conditions	Exposure
Average ramp-up rate (30°C to 217°C)	less than 3°C/second
> 100°C	between 300 and 600 seconds
> 150°C	between 240 and 500 seconds
> 217°C	between 30 and 150 seconds
Peak temperature	max. 260°C
Time within 5°C of actual peak temperature	between 10 and 30 seconds
Cool-down rate (Peak to 50°C)	less than 6°C/second
Time from 30°C to Peak temperature	no greater than 300 seconds

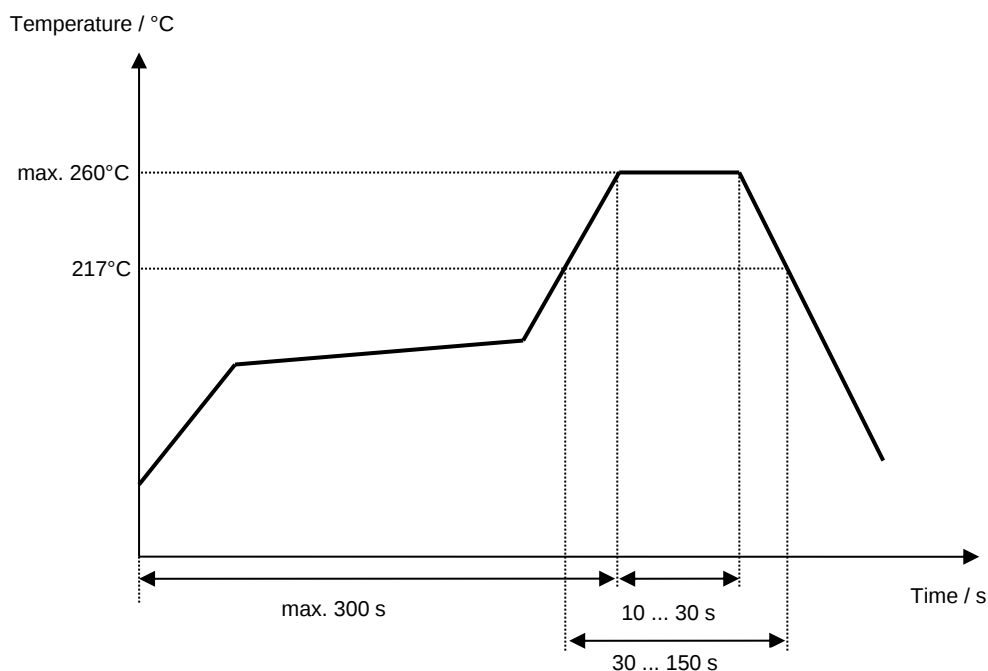Chip-mount air reflow profile**Microchip Frequency Technology GmbH****Potsdamer Straße 18****D 14 513 TELTOW / Germany****Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30**

Microchip Frequency Technology GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Microchip**Filter specification****TFS1225C****5/5****History**

Version	Reason of Changes	Name	Date
1.0	- Generation of development specification	Noack	16.01.2014
1.1	- Generation of filter specification - Add typical values and filter characteristic	Noack	18.06.2014
1.2	- Updated terminating impedance - Updated storage temperature range	P. Jaster	11.04.2019

Microchip Frequency Technology GmbH**Potsdamer Straße 18****D 14 513 TELTOW / Germany****Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30**

Microchip Frequency Technology GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.