
YS6T 14474 RAA


YS6T 14474 RBA

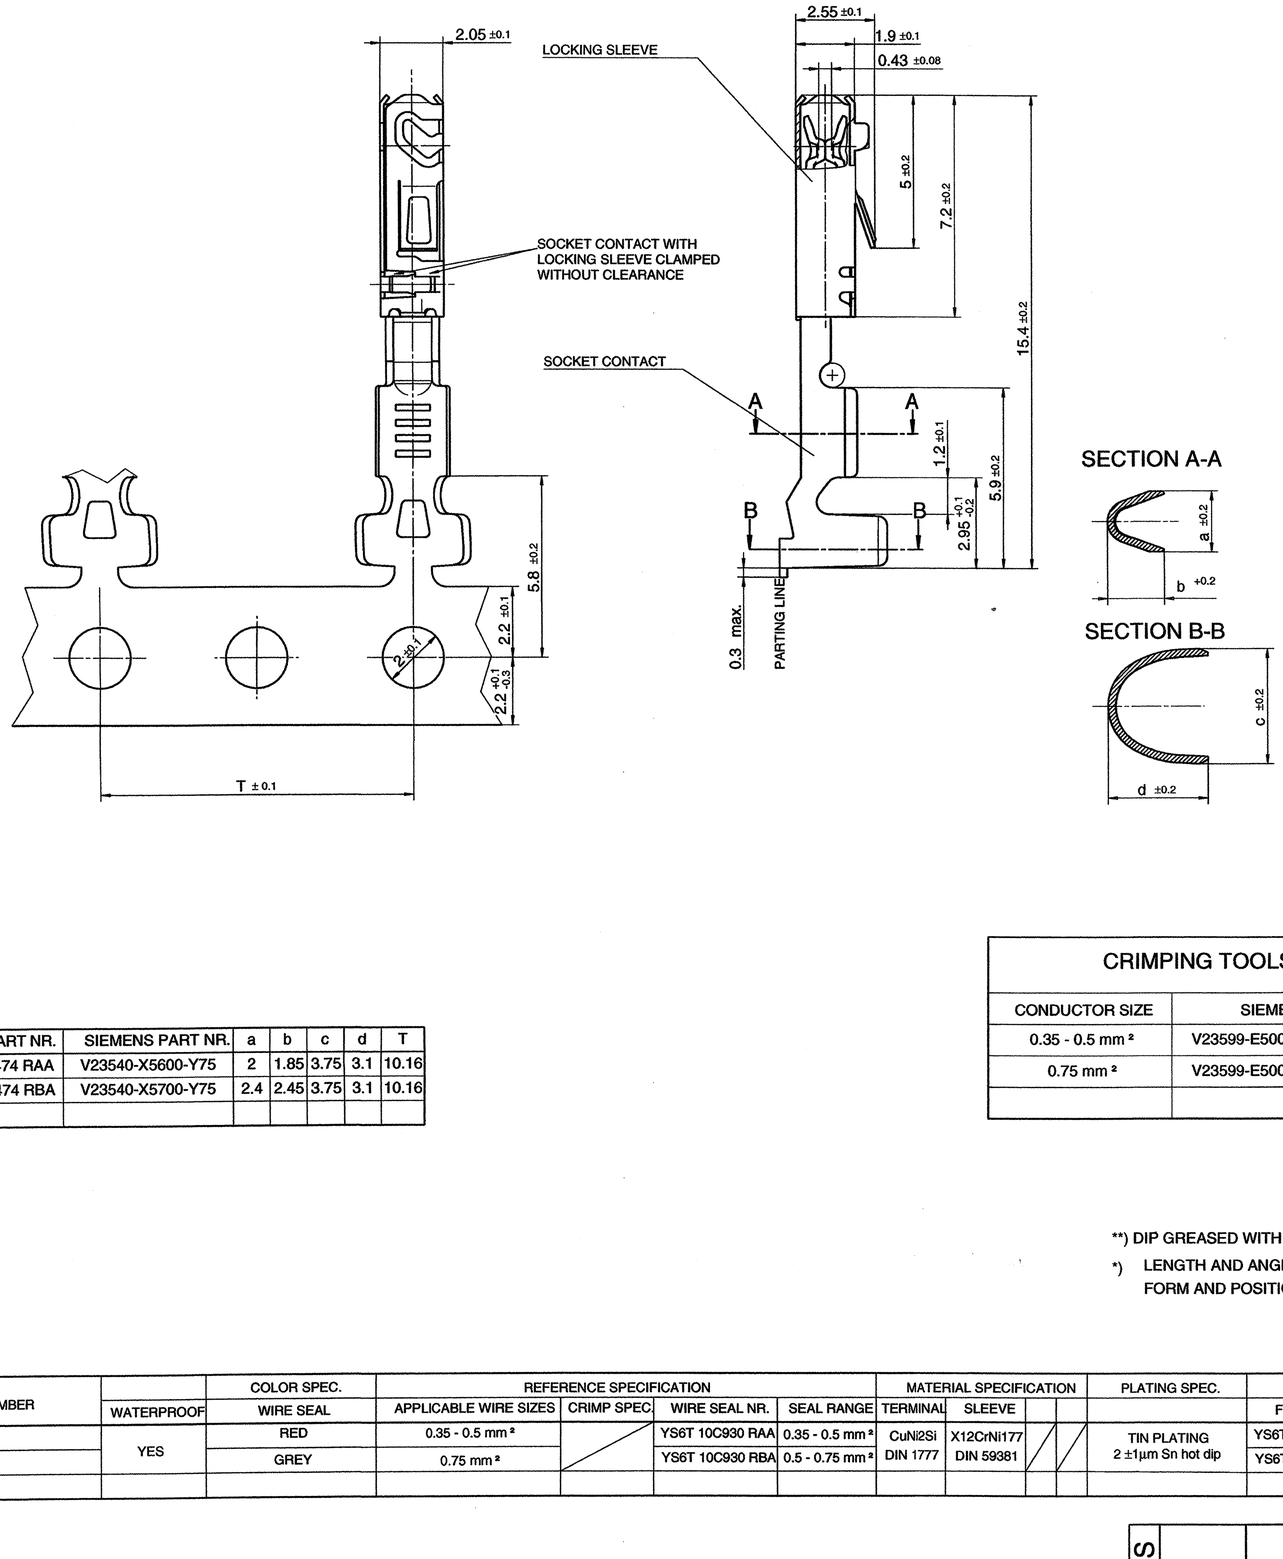

SECTION A-A

SECTION B-B

CONDUCTOR SIZE	WIRE CRIMP HEIGHT (H) mm ±0.03	WIRE CRIMP WIDTH (W) mm ±0.03	INSULATION MOUNT HEIGHT (X) PROPOSED mm	INSULATION MOUNT WIDTH (Y) PROPOSED mm
0.35 mm²	0.92	1.47	2.95	3.05
0.5 mm²	1.0	1.47	3.0	3.05
0.75 mm²	1.12	1.68	3.1	3.05



LTRS	REVISIONS			
ORIGINATOR	CHECKER	ENGR APP	MATL APP	
Initial release EE00-I-10825617-000 Date : 980318				
V.Houdenhove	Schimansky	Wulf	WJ 980319	

FORD PART NR.	SIEMENS PART NR.	a	b	c	d	T
YS6T 14474 RAA	V23540-X5600-Y75	2	1.85	3.75	3.1	10.16
YS6T 14474 RBA	V23540-X5700-Y75	2.4	2.45	3.75	3.1	10.16

CRIMPING TOOLS	
CONDUCTOR SIZE	SIEMENS-NO.
0.35 - 0.5 mm²	V23599-E5004-C37
0.75 mm²	V23599-E5004-C40

**) DIP GREASED WITH OPTIMOL, 10% SOLUTION IN ALCOHOL

*) LENGTH AND ANGLES: DIN 7168-m
FORM AND POSITION: DIN ISO 2768-mH

THIS DRAWING HAS BEEN PREPARED BY OR ON BEHALF OF FORD MOTOR COMPANY. FORD RETAINS ALL COMMON LAW, STATUTORY AND OTHER RESERVED RIGHTS, INCLUDING COPYRIGHTS. THIS DRAWING SHALL NOT BE USED FOR ANY PURPOSE OTHER THAN PERFORMING SERVICES DIRECTLY OR INDIRECTLY TO FORD, WITHOUT THE EXPRESSED WRITTEN PERMISSION OF FORD. UNAUTHORIZED USE, COPYING OR MODIFICATION, INCLUDING THE REMOVAL OF THIS NOTE, MAY CONSTITUTE A VIOLATION OF CIVIL OR CRIMINAL LAWS ENFORCEABLE BY FORD OR GOVERNMENTAL AGENCIES.

COPYRIGHT C FORD MOTOR COMPANY
(YEAR AS INITIAL RELEASE)

FORD PART NUMBER	WATERPROOF	COLOR SPEC. WIRE SEAL	REFERENCE SPECIFICATION APPLICABLE WIRE SIZES	CRIMP SPEC.	WIRE SEAL NR.	SEAL RANGE	MATERIAL SPECIFICATION TERMINAL	SLEEVE			PLATING SPEC.	SUPPLIER CROSS-REFERENCE FORD NR.	SIEMENS NR.	PART NAME	WEIGHT
YS6T 14474 RAA	YES	RED	0.35 - 0.5 mm²		YS6T 10C930 RAA	0.35 - 0.5 mm²	CuNi2Si DIN 1777	X12CrNi177 DIN 59381			TIN PLATING 2 ±1µm Sn hot dip	YS6T 14474 RAA	V23540-X5600-Y75	0.63 ELO sealed terminal	0.2 g
YS6T 14474 RBA		GREY	0.75 mm²		YS6T 10C930 RBA	0.5 - 0.75 mm²						YS6T 14474 RBA	V23540-X5700-Y75	0.63 ELO sealed terminal	0.2 g

Weitergabe sowie Vervielfaeltigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdruecklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte vorbehalten, insbesondere fuer den Fall der Patenterteilung oder GM-Eintragung.
The reproduction, transmission or use of this document or its contents is not permitted without express written authority. Offenders will be liable for damages. All rights, including rights created by patent grant or registration of an utility model or design, reserved.

SIEMENS

Datum	Bearbeiter	Abteilung
13.03.98	V. Houdenhove	A PD

Maßstab 10:1

ELO 0.63 SEALED TERMINAL

Zust	Mitteilung	Datum	Name
01		28.06.99	nvh
52		18.03.98	nvh
51		13.03.98	nvh

V23540-X5600-Y75-*-7627

Blatt 1- von 1

REFERENCE Matl. Ctrl. Per: WSS-M99P23-B

PART MUST COMPLY WITH MATERIAL SPECIFICATION WSS-M99P9999-A1
TO HELP SAFEGUARD HEALTH, SAFETY AND THE ENVIRONMENT.

DRAFIED IN ACCORDANCE WIIH FAO ENGINEERING DRAFIING SIANDARD CURRENI AI INIIIAL RELEASE

3RD ANGLE PROJ
DIMENSIONS IN MILLIMETERS

CAD TYPE	CAD LOC.	CAD FILE	IS MASTER
OPER. NO.	UNIT	DRAWING YS6T 14474 RAA	
DESIGN	DETAIL	TITLE TERMINAL-WIRE SNAP ON FEMALE (ELO 0.63 SEALED TERMINAL)	SHT OF
CHECKED	SAFETY		
SCALE 10 : 1	DATE	DIVISION PLANT	

YS6T 14474 RAA

YS6T 14474 RBA

DRW SIZE A1/D

Downloaded from Arrow.com.