


2201804

<https://www.phoenixcontact.com/us/products/2201804>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

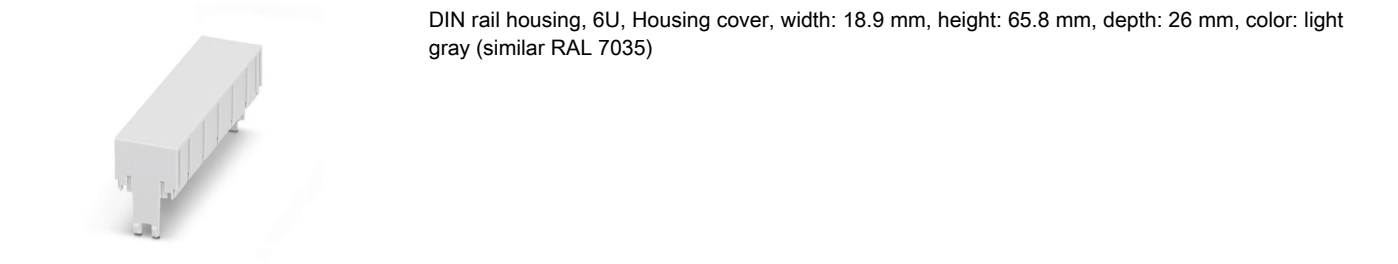

Your advantages

- Tool-free mounting
- Plastic in accordance with UL94 V0: for more rigorous flammability requirements
- Can be machined for application-specific connection technology
- Cover for fully closed device fronts

Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 2201804       |
| Packing unit                         | 10 pc         |
| Minimum order quantity               | 10 pc         |
| Sales key                            | AC15          |
| Product key                          | ACHEBB        |
| GTIN                                 | 4046356909358 |
| Weight per piece (including packing) | 6.32 g        |
| Weight per piece (excluding packing) | 5.1 g         |
| Customs tariff number                | 85389099      |
| Country of origin                    | DE            |

# ME-IO 18,8 C 6U 7035 - Housing cover



2201804

<https://www.phoenixcontact.com/us/products/2201804>

## Technical data

### Notes

|               |                                                           |
|---------------|-----------------------------------------------------------|
| Assembly note | Please observe the application note in the download area. |
|---------------|-----------------------------------------------------------|

### Product properties

|                              |                    |
|------------------------------|--------------------|
| Product type                 | Upper housing part |
| Housing type                 | DIN rail housing   |
| Housing series               | ME-IO              |
| Ventilation openings present | no                 |

### Dimensions

|        |         |
|--------|---------|
| Width  | 18.9 mm |
| Height | 65.8 mm |
| Depth  | 26 mm   |

### Material specifications

|                                        |                       |
|----------------------------------------|-----------------------|
| Color (Housing)                        | light gray (RAL 7035) |
| Flammability rating according to UL 94 | V0                    |
| CTI according to IEC 60112             | 600                   |
| Housing material                       | PA                    |
| Surface characteristics                | untreated             |

### Environmental and real-life conditions

#### Vibration test

|                        |                             |
|------------------------|-----------------------------|
| Specification          | IEC 60068-2-6:2007-12       |
| Frequency              | 10 - 150 - 10 Hz            |
| Sweep speed            | 1 octave/min                |
| Amplitude              | 0.15 mm (10 Hz ... 58.1 Hz) |
| Acceleration           | 2g (58.1 Hz ... 150 Hz)     |
| Test duration per axis | 2.5 h                       |
| Test directions        | X-, Y- and Z-axis           |

#### Glow-wire test

|                  |                        |
|------------------|------------------------|
| Specification    | IEC 60695-2-11:2014-02 |
| Temperature      | 850 °C                 |
| Time of exposure | 30 s                   |

#### Thermal stability / ball thrust test

|               |                        |
|---------------|------------------------|
| Specification | IEC 60695-10-2:2014-02 |
| Temperature   | 125 °C                 |
| Test duration | 1 h                    |
| Force         | 20 N                   |

#### Mechanical strength / tumbling barrel

# ME-IO 18,8 C 6U 7035 - Housing cover



2201804

<https://www.phoenixcontact.com/us/products/2201804>

|                |                        |
|----------------|------------------------|
| Specification  | IEC 60068-2-31:2008-05 |
| Height of fall | 50 cm                  |
| Frequency      | 50                     |

## Shocks

|                                |                                   |
|--------------------------------|-----------------------------------|
| Specification                  | IEC 60068-2-27:2008-02            |
| Pulse shape                    | Semi-sinusoidal                   |
| Acceleration                   | 15g                               |
| Shock duration                 | 11 ms                             |
| Number of shocks per direction | 3                                 |
| Test directions                | X-, Y- and Z-axis (pos. and neg.) |

## Test for substances that would hinder coating with paint or varnish

|               |                    |
|---------------|--------------------|
| Specification | VDMA 24364:2018-05 |
|---------------|--------------------|

## Degree of protection (IP code)

|               |                                                   |
|---------------|---------------------------------------------------|
| Specification | IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08 |
|---------------|---------------------------------------------------|

## Ambient conditions

|                                         |                                                    |
|-----------------------------------------|----------------------------------------------------|
| Max. IP code to attain                  | IP20                                               |
| Ambient temperature (operation)         | -40 °C ... 105 °C (depending on power dissipation) |
| Ambient temperature (storage/transport) | -40 °C ... 55 °C                                   |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                   |
| Relative humidity (storage/transport)   | 80 %                                               |

## Mounting

|               |         |
|---------------|---------|
| Mounting type | Snap in |
|---------------|---------|

## Packaging specifications

|                      |                     |
|----------------------|---------------------|
| Type of packaging    | packed in cardboard |
| Outer packaging type | Carton              |


# ME-IO 18,8 C 6U 7035 - Housing cover

2201804

<https://www.phoenixcontact.com/us/products/2201804>



## Drawings

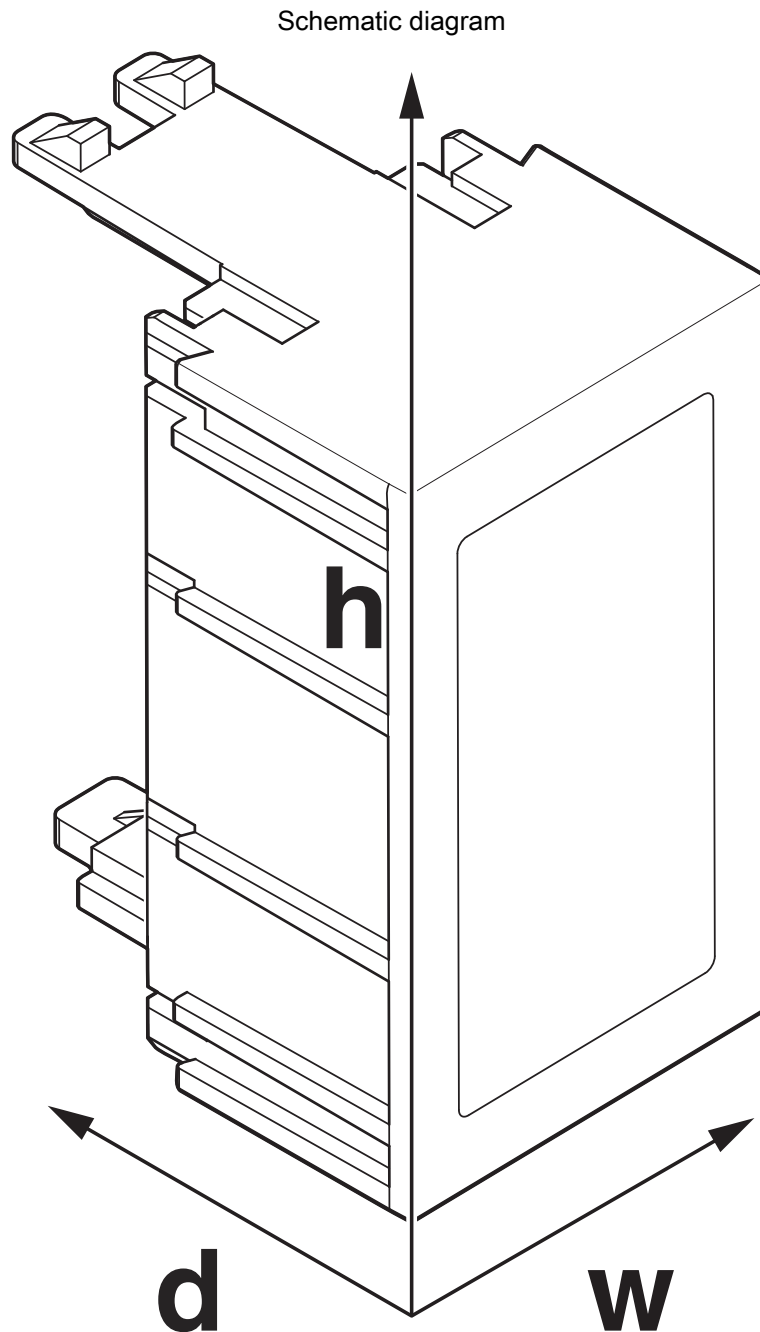

Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.

# ME-IO 18,8 C 6U 7035 - Housing cover

2201804

<https://www.phoenixcontact.com/us/products/2201804>



## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2201804>



**UL Recognized**

Approval ID: E240868

# ME-IO 18,8 C 6U 7035 - Housing cover



2201804

<https://www.phoenixcontact.com/us/products/2201804>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27190603 |
| ECLASS-15.0 | 27190603 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002779 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

# ME-IO 18,8 C 6U 7035 - Housing cover



2201804

<https://www.phoenixcontact.com/us/products/2201804>

## Environmental product compliance

### EU RoHS

|                                         |                    |
|-----------------------------------------|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|-----------------------------------------|--------------------|

### China RoHS

|                                        |                                          |
|----------------------------------------|------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-E                                   |
|                                        | No hazardous substances above the limits |

### EU REACH SVHC

|                                     |                            |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)