


SPECIFICATION CONTROL DRAWING

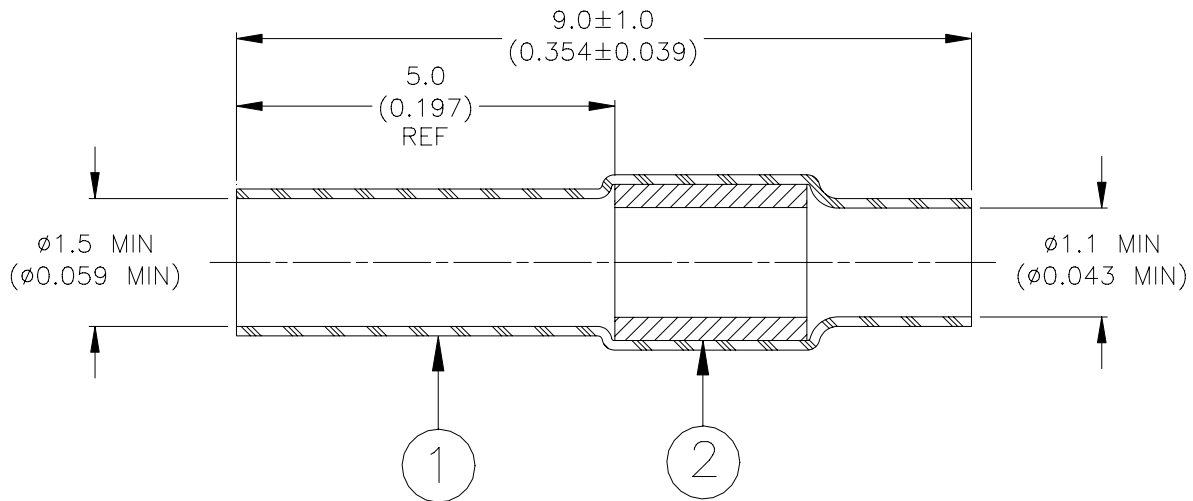


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. MELTABLE SEALING RING: Thermally stabilized thermoplastic. Color – clear.

APPLICATION

1. This device is used to terminate and seal the end of a cable or to terminate and seal a cable shield.
2. For installation, position the end of the cable half way inside the insert (item 2).
3. Heat with Miniray, IR 500 or IR 550 until insert melts.

For best results, prepare the cable as shown:

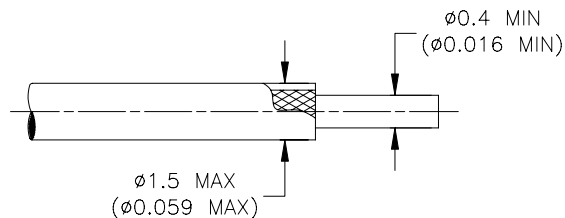

<div><div><div>tyco</div><div>Electronics</div><div>307 Constitution Drive</div><div>Menlo Park, CA 94025</div></div></div>		<div>Wire and Harnessing Products</div>		<div>TITLE : SEALING SLEEVE</div>			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO.: B-006-09			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D001344		REPLACES: N/A	
DRAWN BY: M. FORONDA		DATE: 18-Jan-01	PROD. REV. C	DOC ISSUE: 1	SCALE: None	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check with the web for the latest revision.