
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - ,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST
CM	0


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECO-12-007807	06AUG12	KH	SM

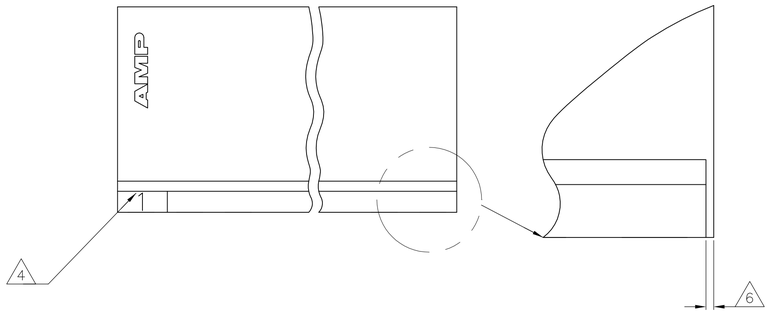



SCALE 10:1

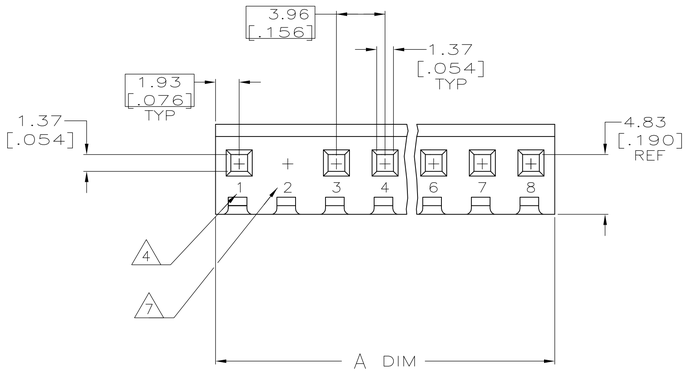

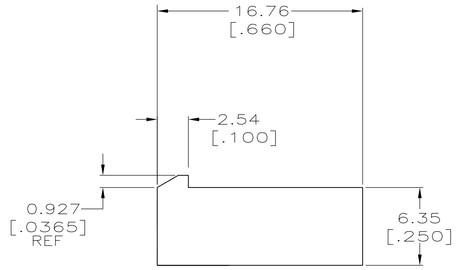


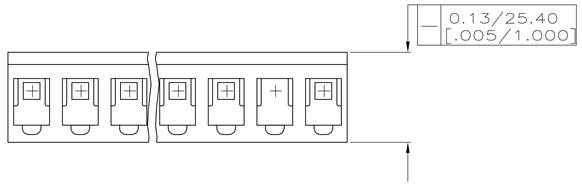

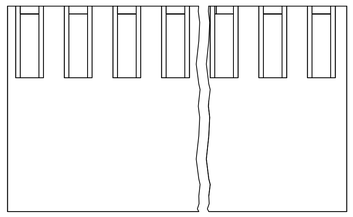


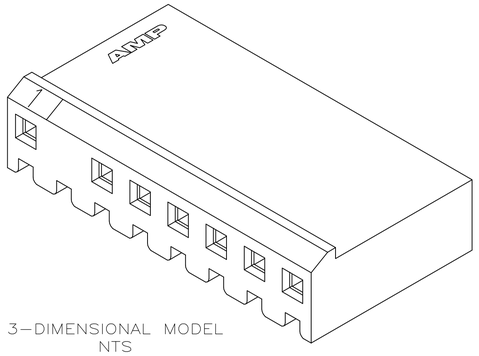

3-DIMENSIONAL MODEL
NTS



OPTION A



OPTION B

1. UNIT ACCEPTS 1.14 [.045] SQUARE OR ROUND POST.
2. UNIT ACCEPTS STANDARD SL-156 CONTACTS.
3. UNIT ACCEPTS KEYING PLUG 640254-1 AND KEYING PIN 640255-1.
4. CIRCUIT I.D. NUMBER(S),TO BE LOCATED SEQUENTIALLY AS SHOWN OR ONLY NO.1 CIRCUIT PLACED ON LOCKING RAMP.
5. DIMENSIONS IN BRACKETS ARE IN INCHES.
6. OPTIONAL CONSTRUCTION (BOTH CORNERS) UP TO 1.27 [.050].
7. CIRCUIT 2 IS MOLDED CLOSED, USING EITHER OPTION A OR OPTION B.

COLOR	A ±0.25 [.010]	NO. OF CIRCUITS	PART NUMBER
ORANGE	11.81 [.465]	3	9-794115-3
NATURAL	75.31 [2.965]	19	1-794115-9
NATURAL	29.85 [1.175]	11	1-794115-1
NATURAL	31.65 [1.246]	8	794115-8
NATURAL	11.81 [.465]	3	794115-3

PRELIMINARY, NOT FOR PRODUCTION
PRELIMINARY, NOT FOR PRODUCTION

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± 0.13 [.005]
3 PLC ± -
4 PLC ± -
ANGLES ± 0°30'

MATERIAL: NYLON, UL 94V-0
FINISH: -

DWN L. McEACHIN 17-MAR-2000
CHK J. ELLIS 17-MAR-2000
APVD J. ELLIS 17-MAR-2000
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME: HOUSING WITH LOCKING RAMP, CIRCUIT NO. 2 CLOSED, SL-156

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-794115	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV C

4805 (3/11)

Downloaded from Arrow.com.