

# RAFIX 22 QR, illuminated selector switch, round collar, short lever, frontring metallic silver, 1 x 90°, shape L, latching, illuminable

**DISCONTINUED**

## Description

RAFIX control units are modular units consisting of several parts. In the RAFIX 22 QR family, they always consist of an actuating element, coupling, and switching element, or of a light attachment, coupling, and lamp socket. For assembly, the switching elements and lamp holders are first snapped into the coupling. Then this unit is snapped onto the actuating element or the signal lamp. To release, a bayonet lever must be actuated.

Actuating elements (such as pushbuttons or emergency stop actuators) have the specified tactility and function only when assembled with the appropriate switching elements. For illuminated actuators and illuminated attachments, please use a lamp socket / LED element as the middle element in the coupling.

For RAFIX 22 QR actuating elements, you can choose between two collar shapes: round and square. The mounting diameter is 22.3 mm according to the standard. The anti-rotation lug can be easily removed with a screwdriver if necessary.

## Additional information according to UL certificate:

- These devices should be mounted in an overall enclosure with sufficient stability and with the specified clearances.



## technical data

### ➤ general

|   |                 |
|---|-----------------|
| Front ring color  | metallic silver |
| Collar shape  | round           |
| Operating temperature, min.                                 | -25 °C          |
| Operating temperature, max.                                 | 70 °C           |
| Storage temperature, min.                                   | -40 °C          |
| Storage temperature, max.                                   | 80 °C           |
| illuminated   | Yes             |
| Packaging   | Box             |
| Packaging unit  | 10 pcs.         |
| Net weight  | 21 g            |
| Operating life  | 500,000 cycles  |
| B10   | 650,000 cycles  |
| Degree of protection, front side, according to DIN EN 60529 | IP65            |

### direct links

➤ [RAFI eCatalog](#)

The information in this data sheet only contains general descriptions and / or performance features, which may not apply precisely as described to the respective application, and which may change due to further product enhancements. The technical data, illustrations and other information about our products are the mere results of individual technical testing. These descriptions and other product features are only binding if they expressly agreed upon at the time of the conclusion of a binding contract. In all other cases, we reserve the right to make technical changes as well as changes of availability. Pictures and other graphic illustrations are approximations only. All product names may be trademarks or brand names of the RAFI Group or any other sub-supplier of RAFI. The use of such by any third parties for their own purposes may infringe the rights of the respective entity holding those rights.

**date:** Aug 22, 2025 **page:** 1/4

**RAFI GmbH & Co. KG**

Ravensburger Str. 128-134  
88276 Berg / Ravensburg  
Germany  
[www.rafi-group.com](http://www.rafi-group.com),  
[info.headquarters@rafi-group.com](mailto:info.headquarters@rafi-group.com)

|                              |                |
|------------------------------|----------------|
| Environment resistance       | IEC 60068-2-14 |
|                              | IEC 60068-2-30 |
|                              | IEC 60068-2-33 |
|                              | IEC 60068-2-78 |
| Protection class             | II             |
| Minimum order quantity (MOQ) | 10 pcs.        |
| RoHS compliant               | Yes            |
| REACH compliant              | Yes            |
| Country of origin            | HU             |

**> mounting diameters**

|                           |            |
|---------------------------|------------|
| Outside dimension, length | 29.8 mm    |
| Outside dimension, width  | 29.8 mm    |
| Outside dimension, height | 45.1 mm    |
| Mounting hole             | 22.3 mm    |
| Mounting depth            | 56.4 mm    |
| Installation height       | 22.2 mm    |
| Grid, min.                | 50 x 30 mm |
| Collar dimension          | ø 29,8 mm  |

**> mechanical data**

|                            |                  |
|----------------------------|------------------|
| Fixing                     | Threaded ring    |
| Actuation function         | latching         |
| Operating torque, max.     | 2 Nm             |
| Threaded ring torque, max. | 1.2 Nm           |
| Rotating angle             | 1 x 90°, shape L |

**Use according to UL:**

RAFIX control devices are defined at RAFI as modular elements, consisting of an actuating element, if necessary a coupling and an individual contact or lighting unit.

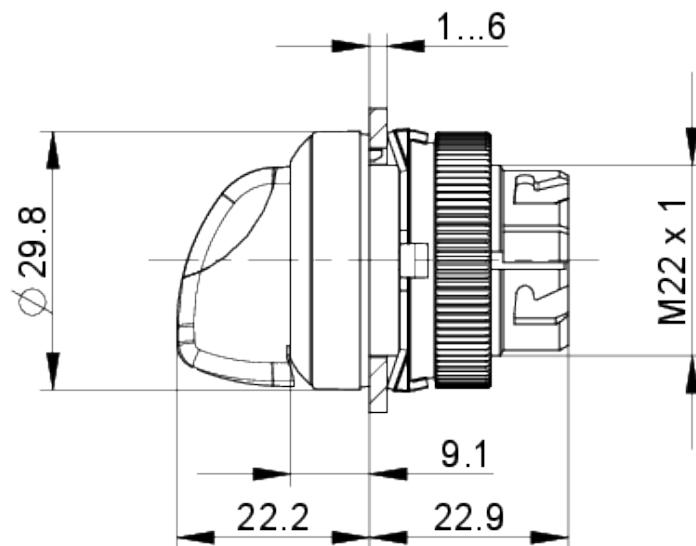
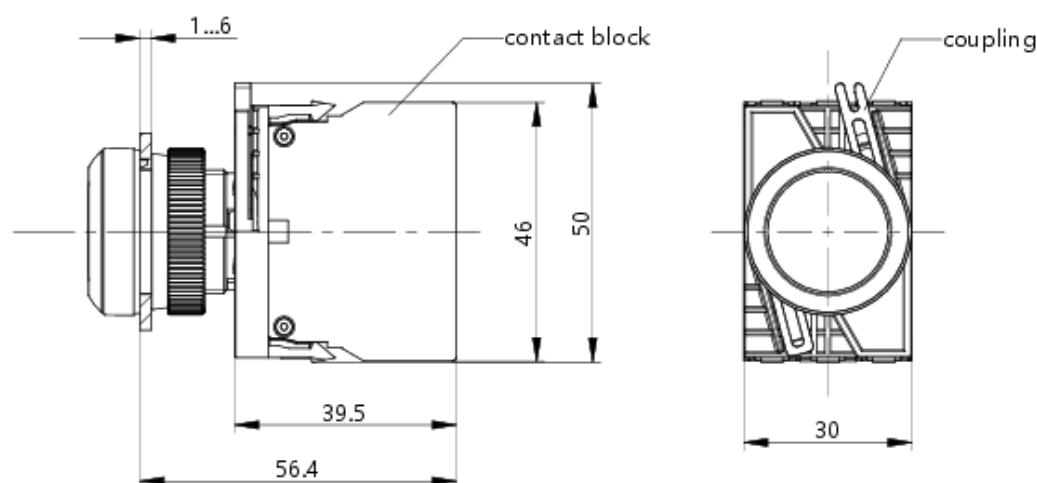
Actuating elements (such as pushbuttons, emergency stop actuators, etc.) have the intended tactility, reset and function only when assembled with the appropriate switching elements.

The information in this data sheet only contains general descriptions and / or performance features, which may not apply precisely as described to the respective application, and which may change due to further product enhancements. The technical data, illustrations and other information about our products are the mere results of individual technical testing. These descriptions and other product features are only binding if they are expressly agreed upon at the time of the conclusion of a binding contract. In all other cases, we reserve the right to make technical changes as well as changes of availability. Pictures and other graphic illustrations are approximations only. All product names may be trademarks or brand names of the RAFI Group or any other sub-supplier of RAFI. The use of such by any third parties for their own purposes may infringe the rights of the respective entity holding those rights.

**date:** Aug 22, 2025 **page:** 2/4

**RAFI GmbH & Co. KG**

Ravensburger Str. 128-134  
88276 Berg / Ravensburg  
Germany  
www.rafi-group.com,  
info.headquarters@rafi-group.com

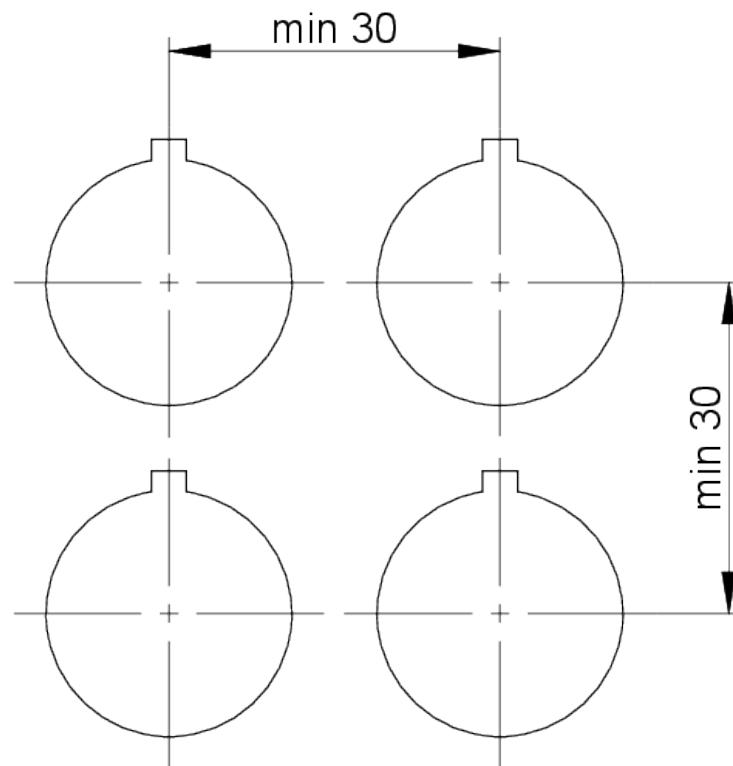
**drawings****Dimensioned drawing****System drawing**

The information in this data sheet only contains general descriptions and / or performance features, which may not apply precisely as described to the respective application, and which may change due to further product enhancements. The technical data, illustrations and other information about our products are the mere results of individual technical testing. These descriptions and other product features are only binding if they are expressly agreed upon at the time of the conclusion of a binding contract. In all other cases, we reserve the right to make technical changes as well as changes of availability. Pictures and other graphic illustrations are approximations only. All product names may be trademarks or brand names of the RAFI Group or any other sub-supplier of RAFI. The use of such by any third parties for their own purposes may infringe the rights of the respective entity holding those rights.

**date:** Aug 22, 2025 **page:** 3/4

**RAFI GmbH & Co. KG**

Ravensburger Str. 128-134  
88276 Berg / Ravensburg  
Germany  
www.rafi-group.com,  
info.headquarters@rafi-group.com

**front panel drawing**

The information in this data sheet only contains general descriptions and / or performance features, which may not apply precisely as described to the respective application, and which may change due to further product enhancements. The technical data, illustrations and other information about our products are the mere results of individual technical testing. These descriptions and other product features are only binding if they expressly agreed upon at the time of the conclusion of a binding contract. In all other cases, we reserve the right to make technical changes as well as changes of availability. Pictures and other graphic illustrations are approximations only. All product names may be trademarks or brand names of the RAFI Group or any other sub-supplier of RAFI. The use of such by any third parties for their own purposes may infringe the rights of the respective entity holding those rights.

**date:** Aug 22, 2025 **page:** 4/4

**RAFI GmbH & Co. KG**

Ravensburger Str. 128-134  
88276 Berg / Ravensburg  
Germany  
[www.rafi-group.com](http://www.rafi-group.com),  
[info.headquarters@rafi-group.com](mailto:info.headquarters@rafi-group.com)