



Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: **General Purpose Power Relay**

Coil Magnetic System: **Polarized, Monostable**

Contact Arrangement: **1 Form C SPDT-CO**

Current Type: **DC**

Contact Current Rating: **25 A**

Features

Product Type Features

Relay & Contactor Type	General Purpose Power Relay
------------------------	-----------------------------

Configuration Features

Contact Arrangement	1 Form C SPDT-CO
---------------------	------------------

Electrical Characteristics

Coil Resistance	320 Ω
Contact Current Rating	25 A
Coil Voltage Rating	28 VDC

Body Features

Enclosure Type	Hermetically Sealed
----------------	---------------------

Contact Features

Contact Material	Silver Cadmium Oxide
Terminal Plating	Tin-Lead

Termination Features

Main Termination & Connection Type	Solder Hook Terminals
Coil Termination & Connection Type	Solder Hook Terminals

Mechanical Attachment

Product Mounting Feature Type	Mounting Brackets
-------------------------------	-------------------



Product Mount Type	Chassis Mount
Usage Conditions	
Operating Temperature Range	-70 – 125 °C[-94 – 257 °F]
Environmental Ambient Temperature (Max)	125 °C[257 °F]
Operation/Application	
Vibration Resistance	30G's, 10 – 3000Hz
Shock Resistance	200G's, 6ms
Coil Magnetic System	Polarized, Monostable
Current Type	DC
Other	
Contact Current Class	>16 – ≤25 A

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Cd (10% in Component Part) Cadmium oxide (7.84% in M-15215-1) Pb (.13% in M-15215-2) Article Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not lead free process capable

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products



will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 6-1617753-3
FCA-325-CY2

Also in the Series | CII FCA-125 Series

AC Relays(10)

DC Relays(68)

Electromechanical Relays(78)

Plug-In Relays(25)

Customers Also Bought

TE Part #306194-003
44AM1121-22-9/96-9

TE Part #416486-000
342A024-25/225-0

TE Part #32065
TERMINAL,BODY FLAG R 22-16 6

TE Part #50832-1
TERMINAL,PIDG PTFE R 22-20 10

TE Part #9-55556-0
10 POWER TAP ASSY WITH SCREW
#6-32



TE Part #102107-3
MOD IV PIN LP

TE Part #1462039-2
IM07CGR=IM RELAY 200mW 24V HDV

TE Part #1618002-7
EV200AAANA=RELAY, EV200 SPST-N

FCA-125-3

General Purpose Power Relay, DC, Polarized, Monostable, 1 Form C SPDT-CO, 25 A
Contact Rating, 28 VDC Coil Voltage, Chassis Mount, CII FCA-125 Series

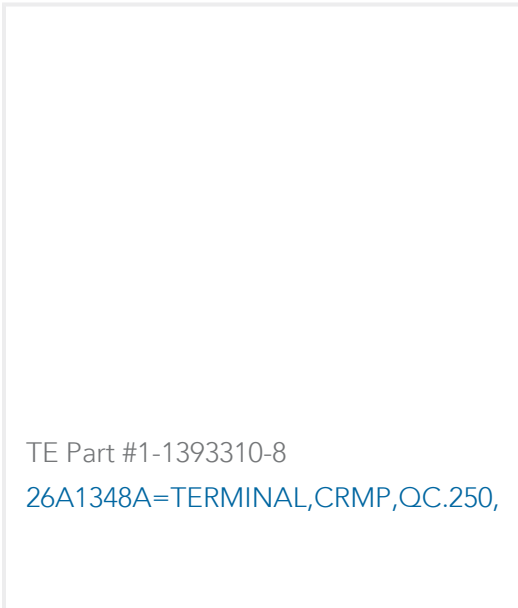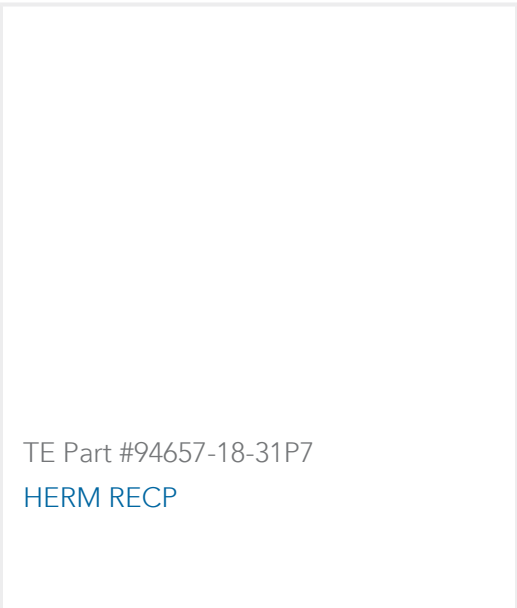

Documents

Product Drawings

FCA-125-3=M6106/19-003

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-1617748-4_B_c-3-1617748-4-b.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-1617748-4_B_c-3-1617748-4-b.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-1617748-4_B_c-3-1617748-4-b.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

5-1773450-5_sec5_FCA-125

English

RELAY

English