


KN-59-06	
REVISIONS	
ISSUE	CHANGES
8	CN 38979 C REDRAWN JPK 12/08/03
9	CN 39703 E BAM 11/15/06
10	CN 39707 C PMC 11/20/06
KN-59-06SD	
SCALE 2 : 1	
APPROX SURFACE AREA	
USED ON	
REF:	
N ANGLE PLUG	
DRAWN J. KENNEDY	DATE 12/09/03
DESIGN	DATE
APPR.	DATE
 ELECTRONICS CO., INC. ROCK HILL, SOUTH CAROLINA 29730	
KN-59-06	

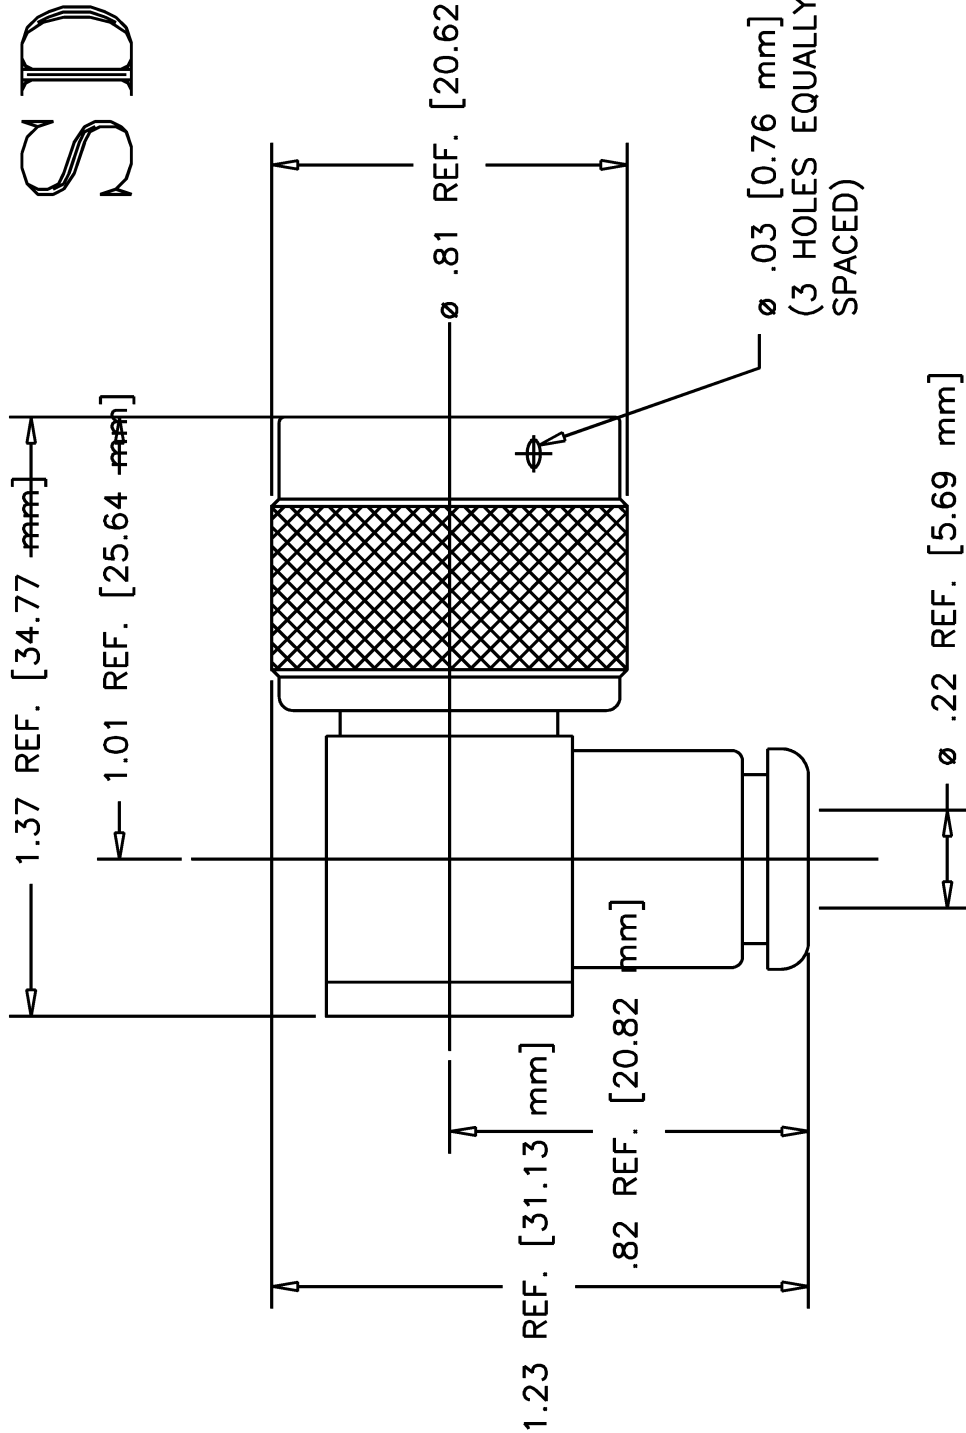

NOTES:

- FOR USE WITH RG-55, 58, 223/U CABLE.
- FOR CABLING INSTRUCTIONS USE CP-1025.
- MATERIALS:
 - INSULATOR: TEFLON, ASTM-D-4894
 - C-RING } PHOSPHORUS BRONZE, ASTM-B-103
 - OUTER CONTACT
 - GASKETS: SILICONE RUBBER, A-A-59588
 - WASHER: BRASS, ASTM-B-36
 - ALL OTHER METAL PARTS: BRASS, ASTM-B-16
- FINISHES:
 - ALL METAL PARTS: SILVER PLATED, ASTM-B-700
- ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - FREQUENCY RANGE: DC TO 11 GHz.

SD

MAY 2007 THIS DRAWING BECOME THE PROPERTY OF
WINCHESTER ELECTRONICS CORPORATION, 1000 WILSON RD, CHICAGO, IL 606492