

NO. OF PINS _____
02~15: 02~15PINS

PACKAGE
1: BAG



COLOR OF HOUSING
1: NATURAL (STANDARD)
2: BLACK (NON-STANDARD)
3: BLUE (NON-STANDARD)
4: RED (NON-STANDARD)
PLEASE CONTACT WITH AFCI FOR
THE NON-STANDARD COLOUR

- NOTE:
- 1.MATERIAL: PA66, HALOGEN FREE, UL APPROVAL
 - 2.PRODUCT SPEC: PRODUCT SPECIFICATION GS-12-1572
 - 3.VOLTAGE RATING: 50V AC/DC. CURRENT RATING: 1A AC/DC
 - 4.TEMPERATURE RANGE: -40°C~+105°C
 - 5.MATE WITH HEADER: AFCI 10155242 & 10155243
 - 6.USE WITH: 10155245 CRIMP TERMINAL
 - 7.ORDERING CODE:
- (COLOUR OPTIONS ARE FOR VISUAL DIFFERENTIATION ONLY, NO COSMETIC APPLIES)

2~7Pin

8~15Pin

Poles	Dimensions(mm)				Poles	Dimensions(mm)			
	A	B	C	D		A	B	C	D
02	1.25	3.75	2.10	09	10.00	12.50	6.25	8.65	10.70
03	2.50	5.00	3.00		11.25	13.75	8.20	10.70	
04	3.75	6.25	4.05	11	12.50	15.00	8.20	10.70	10.70
05	5.00	7.50	4.25		13.75	16.25	8.20	10.70	
06	6.25	8.75	6.25	13	15.00	17.50	8.20	10.70	10.70
07	7.50	10.00	6.25		16.25	18.75	8.20	10.70	
08	8.75	11.25	6.25	15	17.50	20.00	8.20	10.70	

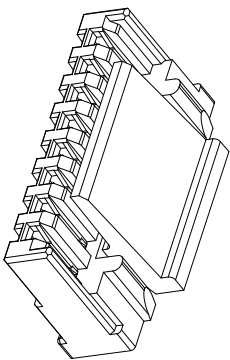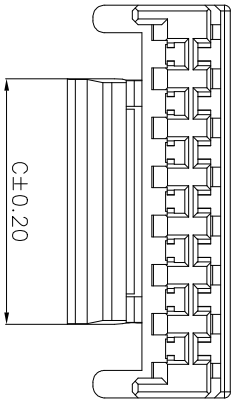

mat'l. code				surface		tolerance		projection	product family	
ltr	ecn no	dr	date	ISO 1302	ISO 406	ISO	1109		MINITEK	
A	New release	Jason	2020/Aug/7	tolerances unless otherwise specified					title	
				angles	linear	.X±.3			1.25mm pitch connector Receptacle	
				0°±x°	.XXX±.10			mm		
		dr	Jason Wang	2019/Oct/21	scale 4:1					
		engr	Jason Wang	2020/Aug/7						
		chr	-	-						
		appd	TIM YAO	2020/Aug/7						
sheet index	revision	A							dwg no	sheet 1 of 1
									10155244	A3
									type	Product Customer Drawing