


REVISIONS

REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2015-01-21
B	ADD THE CODE LOGIC	2015-04-28
C	ADD CABLE RANGE	2015-05-18
D	ADD NOTE 3	2015-06-18
E	ADD KEYWAY	2016-04-25

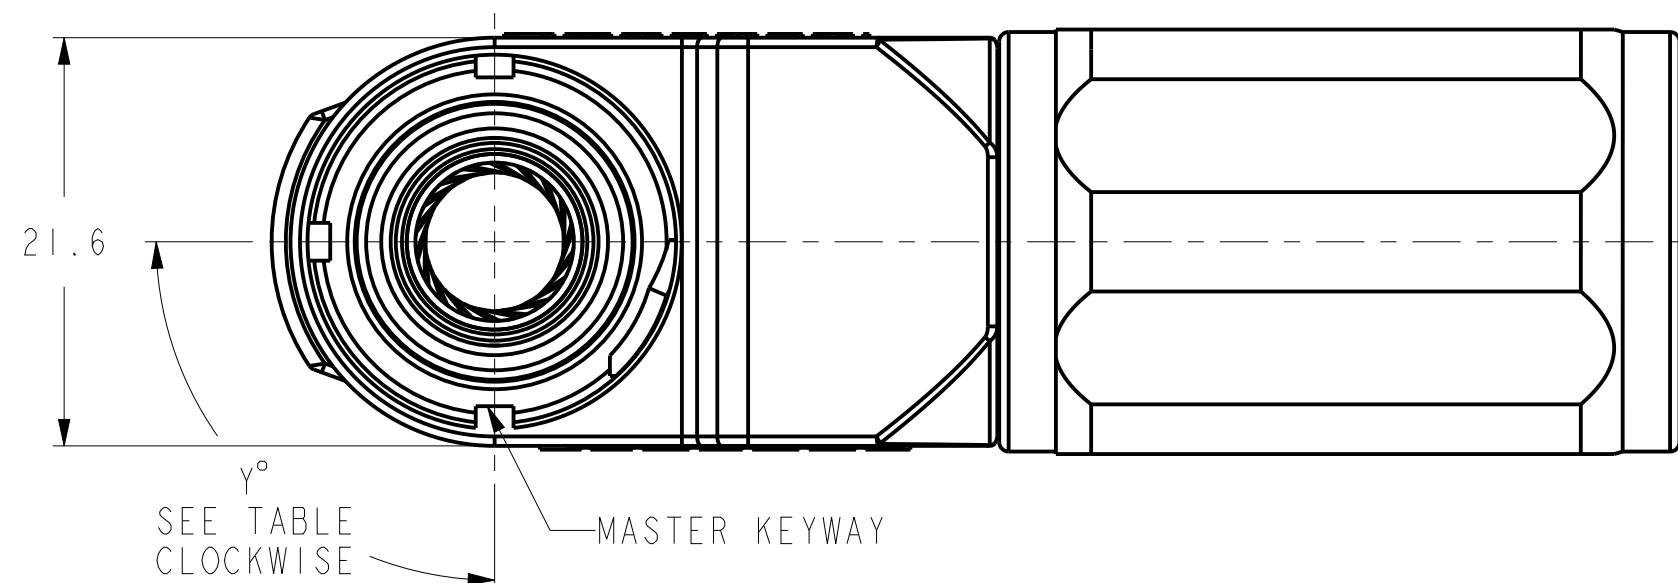

CURRENT RATING	200 Amps MAX
OPERATING VOLTAGE	1000V DC
OPERATING TEMPERATURE	-40°C-105°C
CONTACT RESISTANCE	0.3 mΩ

BASE NUMBER
COLOR, SEE TABLE
WIRE RANGE, SEE TABLE
SEALING, SEE TABLE
KEYWAY, SEE TABLE

CODE NUMBER REFERENCE: SLPPB () B () () ()

BASE NUMBER
WIRE RANGE, SEE TABLE
WITH BACKSHELL
SEALING, SEE TABLE
COLOR, SEE TABLE
KEYWAY, SEE TABLE


ITEM	DESCRIPTION	CODE NUMBER	MFG NUMBER
COLOR	ORANGE	O	0
	BLACK	B	1
	RED	R	2
WIRE RANGE	50 MM2 CRIMPING	50	0
	35 MM2 CRIMPING	35	3
SEALING	IP67(MATED)	S	0
	NO SEALING	N	1
KEYWAY (Y°)	NO KEYWAY	BLANK	BLANK
	90°	0	0
	180°	1	1
	60°	2	2
	120°	3	3
	150°	4	4

- | | |
|---|-----|
| 3. 35MM2 WIRE CRIMP PLUG USES THE SAME CRIMP DIE AS 50MM2, SUPPLIED WITH A PRE-ASSEMBLED CRIMP REDUCER. | CON |
| 2. IF CHOOSE NO SEALING TYPE, THERE WILL BE NO O-RINGS AND GROMMET. | |
| 1. THE REFERENCED PRODUCT MEETS COMPLIANCE TO THE MAXIMUM CONTRADICTION VALUES(MCVS) SET FORTH IN THE 2009/125/EC AMENDMENT TO 2011/65/EU RoHS DIRECTIVE. | |

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND
SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR
ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES
WITHOUT WRITTEN PERMISSION FROM THE AMPHENOL CORP.

N/A	
NEXT ASSEMBLY	PRO/ENGINEER INFORMATION
METRIC DOCUMENT	Pro/e Model Used:
	10-730188-000.ASSEMB
	Drawing Name:
	10-730188.CUTS

LEGENDS:
 = FLAG NOTE CALL OUT
 REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION		NOTE	
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= $\pm 2^{\circ}$ DEFAULT LINEAR TOLERANCES SEE TABLE ----- DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; OTHER AMPHENOL STANDARDS: 9-9318 LEGENDS:  =FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC.		PARTS LIST						
		N/A		APPROVALS		DATE		AMPHENOL INDUSTRIAL OPERATIONS Amphenol Technology(Zhuhai)Co.,Ltd No.63, Xingnan Road, Sanzao Town, Jinwan, Zhuhai, PRC		
				PREPARED BY SEVEN XIE		25-Apr-16				
				ENGINEER IN CHARGE ROB WENG						
				DESIGN MANAGER DERIC LI						
DESIGN ACTIVITY GROUP C&I										
PROCESS SPEC.		N/A		THIRD ANGLE PROJECTION						
										
				SIZE C		CAGE CODE 77820		DOCUMENT NO. 10-730188-()		REV. E
				SCALE: 1, 0		REF.		SHEET 1 OF 1		