


© – TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER ECR-24-226486	20NOV2024	TB	JP

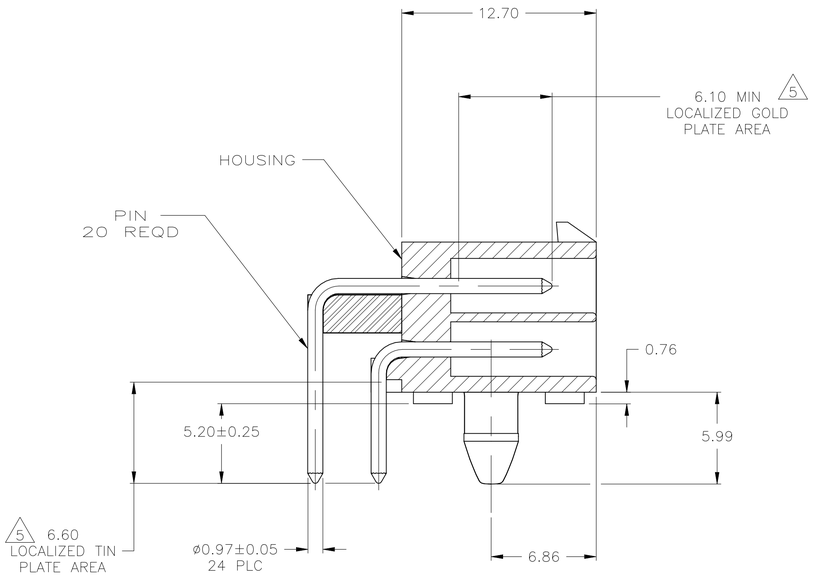

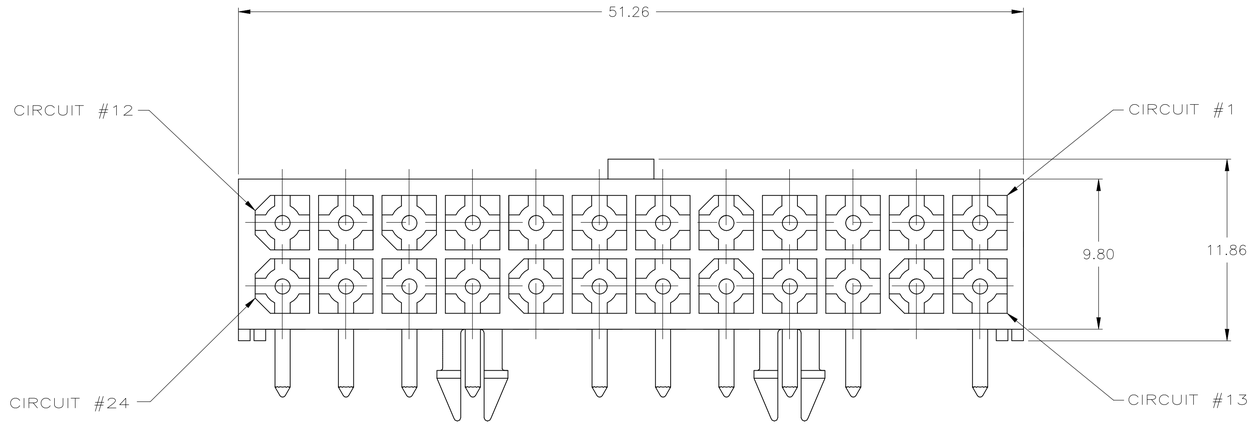

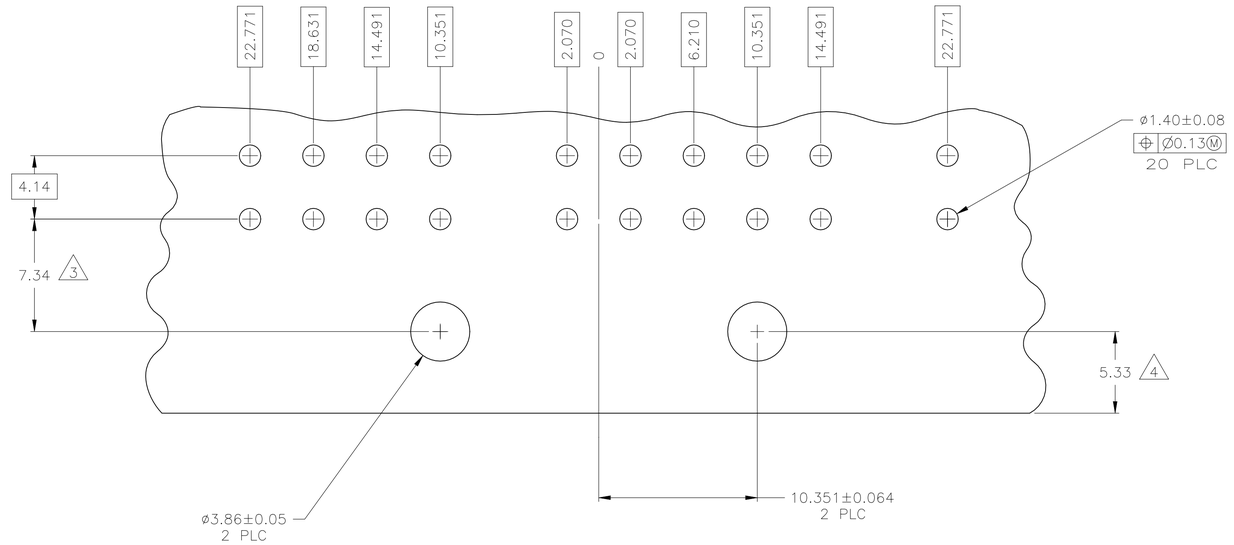

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 THICK P.C. BOARD

1 PINS TO COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.

2 MATES WITH PLUG P/N 770587-1.

3 COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.

4 RECOMMENDED FOR EDGE MOUNTING.

5 0.00076 MIN GOLD PLATE IN THE LOCALIZED GOLD PLATE AREA, 0.00381 MIN MATTE TIN IN THE LOCALIZED TIN PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

1.00	.039	6.10	.240	51.26	2.018
0.76	.030	5.99	.236	22.771	.8965
0.25	.010	5.33	.210	18.631	.7335
0.13	.005	5.08	.200	14.491	.5705
0.08	.003	4.14	.163	12.70	.500
0.064	.0025	3.86	.152	10.351	.4075
0.05	.002	3.68	.145	9.80	.386
0.00381	.000150	2.070	.0815	7.34	.289
0.00127	.000050	1.57	.062	6.86	.270
0.00076	.000030	1.40	.055	6.210	.2445
MM	IN	MM	IN	MM	IN

CONVERSION TABLE

2,8,14,&20	BRASS	TIN 5	NYLON, UL94V-0	WHITE	1586746-2
PIN OMITTED	MATERIAL	FINISH	MATERIAL	COLOR	PART NO.
	PIN		HOUSING		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN K. WHITAKER 02FEB2006
CHK C. JONES 02FEB2006
APVD C. JONES 02FEB2006

TE Connectivity

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.13
3 PLC ± –
4 PLC ± –
ANGLES ± –

PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –

NAME HEADER ASSEMBLY,RIGHT ANGLE, W/SHORT PEG,24 CIRCUIT, SPECIAL, MINI UNIVERSAL MATE-N-LOK(TM)

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1586746	–

MATERIAL SEE TABLE
FINISH SEE TABLE

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV D

4805 (1/15)

Downloaded from Arrow.com.