



POWER^{XR}

Programmable Power Technology

Quick Start Guide XRP7713EVB-DEMO-1-KIT

Thank you for your interest in Exar's Power^{XR} Programmable Power Technology!

This kit contains everything you need to become proficient in Power^{XR} – just supply the computer & power:

1. XRP7713EVB-DEMO-1 demonstration board
2. XRP77XXEVB-XCM configuration board
3. USB Flash Drive with PowerArchitect™ Software
4. USB cable


1 Load the Software

Plug in the USB stick and double click **PowerArchitect_setup.exe**. This will guide you through the installation wizard.




2 Attach the Boards

Orient the Exar Communications Module (XCM) and the Demo Board as shown. Align the pins of the 10 pin headers. Press the boards together to mate the XCM to the Demo Board.



3 Connect to Power Supply

Connect the positive lead of your bench supply to VIN1 (red arrow) and the negative lead to Ground (yellow arrow). Do not exceed 24 volts.

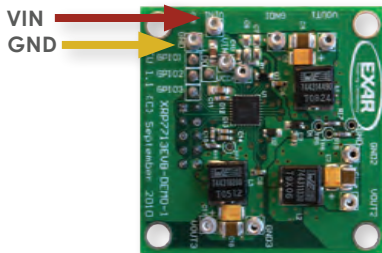

4 Connect USB Cable

Plug in the USB cable from your PC to the XRP77XXEVB-XCM configuration board. This is the only board with a USB connection on it.

5 Launch PowerArchitect

Double click on the PowerArchitect executable. PowerArchitect will instruct you to load a configuration, please select the right one to create. The board should have been recognized already, if not, go to the File Menu and perform a "Board Search" to locate the board. The evaluation board manual may also be downloaded from www.exair.com/PowerXR.

POWER 
POWERARCHITECT

A decorative wavy line in shades of orange and brown curves across the middle of the page.

www.exar.com

EXAR CORPORATION

48720 Kato Road
Fremont, CA 94538
U.S.A.

T. +1.510.668.7000
F. +1.510.668.7001

EXAR IS A TRADEMARK OF EXAR CORPORATION. ALL OTHER TRADEMARKS AND REGISTERED TRADEMARKS ARE PROPERTY OF THEIR RESPECTIVE OWNERS.

XRPAQSG-XRP7713_0411 ©2011 EXAR CORPORATION